

■ Cable Solutions


LÜTZE

Machine and System Installation Technology

Cable and control cables
Cable fittings,
Cable Assemblies and C-tracks
Cable conduit and cable fittings
Installation accessories and Tools
Actor-Sensor-Interface
EMC products

From products to solutions!

Installation • Cabinet • Automation • OEM • Transportation

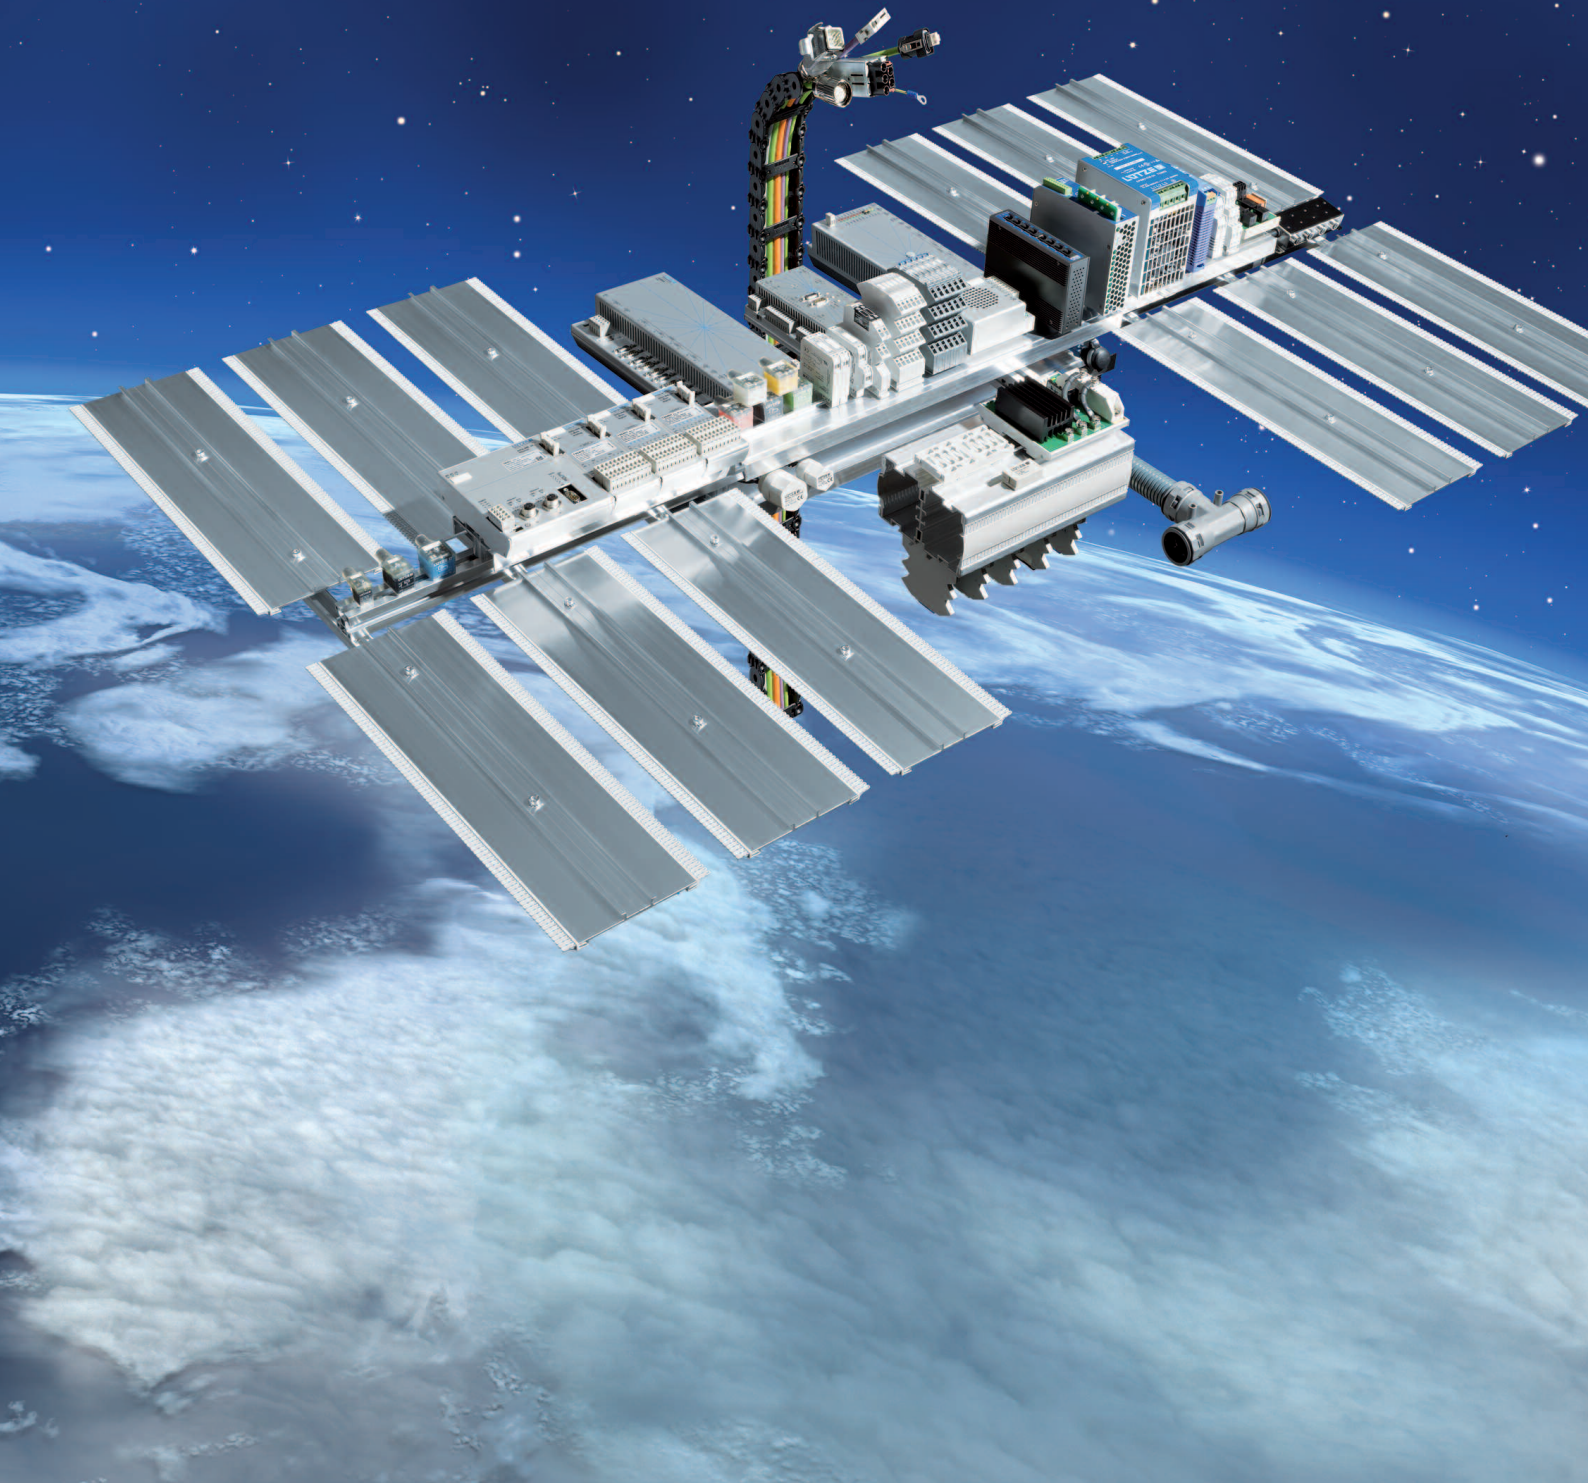


Welcome to LÜTZE

Installation Solutions



We have been developing and manufacturing electronic and electrical engineering solutions for controls and installations for more than 50 years.

Cabinet Solutions

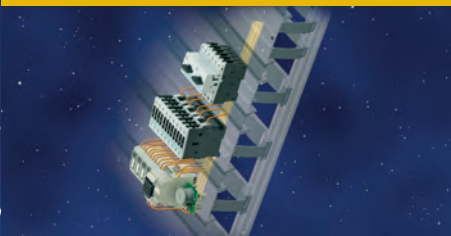

Great expertise and many years of experience in the development of industrial-grade cables and wires enable us to develop, together with our customers, an optimal solution for your applications.

Especially our LÜTZE SUPERFLEX® cables in drag chain applications have proved to be flexible, versatile and reliable.

Automation Solutions



Our basic concept as system suppliers, providing a comprehensive and well-matched product range with which we can generate innovative and customized solutions for our customers, has stood the test of time.

The close relationship between product development and customer requirements allows LÜTZE continuously to improve and develop our products for the various markets.

OEM Solutions



LÜTZE systems comply with the highest industrial standards; LÜTZE solutions mean improvement and innovation.

Our product groups include components and concepts suitable for almost any control application. For more information on our products, please visit www.luetze.com.

Transportation Solutions





Business Management: Sustainable and forw



The future is blue

Sustainable enterprise means thinking and planning ahead, understanding and embedding the belief that long lasting success is more important than short-term profit maximisation.

This is an attitude that has existed within LÜTZE for quite some time. Economic and environmental responsibilities complement each other well and are reflected in the

sustainable management and product policy - and from now in the SkyBLUE campaign.

We manufacture our products in a resourceful and energy-conscious manner. We use long lasting, environmentally-friendly materials. And our products, in turn, help our customers save energy and resources.

Longevity of LÜTZE SUPER-FLEX® drag chain cables avoids waste and reduces the need for resources significantly.

Good for everyone: for us, for the environment, for our customers a win-win-win situation.

ard-looking

„The competitiveness of our industry and of its suppliers depends quite substantially on how we succeed in developing practical results. The results that we produce together today, are our competitive advantages in the future.“

Udo LÜTZE,

Member of the Executive Committee of
the Green Carbody Innovation Alliance



Goods with real value

The value of a product or a solution from LÜTZE is determined by its sustainable qualities as well. Every innovation is only as successful in the future if it has a long-term positive effect.

Therefore, we provide, for example, non-ageing components and those with extremely high efficiency. We are incorporating the necessary knowledge and manu-

facturing head start in numerous joint projects with the objective of improving energy efficiency and sustainable technologies and industries. Thus, LÜTZE provides answers and shows ways to handle resources responsibly, with our environment and finally our future.



RoHS

Overview



Chapter 1: Assemblies	1.1
SIEMENS Standard motor cables	1.5 - 1.11
SIEMENS Standard extensions	1.12 - 1.14
SIEMENS Standard feedback cables	1.15 - 1.24
BOSCH-REXROTH Standard motor cables	1.25 - 1.26
BOSCH-REXROTH Standard feedback cables	1.27
LENZE Standard motor cables	1.28
LENZE Standard feedback cables	1.29 - 1.30
LENZE Standard Cable for motor fan	1.31
SEW Standard motor cables	1.32 - 1.37
SEW Standard feedback cables	1.38

Siemens Simatic Front-end plug S7, patchcable Cat5e / Cat6, USB 3.0 Connection cables, Coil cables	up to 1.39
---	------------



Chapter 2: C-track cables	2.1
Overview C-track cables	2.2 - 2.3
PUR control cables for use in C-track chains	2.4 - 2.7
TPE control cables for use in C-track chains	2.8 - 2.9
PVC control cables for use in C-track chains	2.10 - 2.15
PUR Electronic cables for use in C-track chains	2.16 - 2.19
PVC Electronic cables for use in C-track chains	2.20 - 2.21
Installation in C-tracks	2.22 - 2.23
Service life C-track cables	2.24



Chapter 3: Servo cables	3.1
Overview Servo cables	3.2 - 3.3
PUR Power/Brake cable for use in C-track chains	3.4 - 3.7
PUR Signal cable for use in C-track chains	3.8 - 3.10
PUR Power/Brake cable, PVC Supply Line	up to 3.11
PUR- and PVC-Signal Cable	



Chapter 4: Bus- and Network Cables	4.1
Overview Bus- and Network Cables	4.2 - 4.3
Bus cables for Profibus	4.4 - 4.5
Bus cables for CAN and Interbus	4.6 - 4.7
Network Cables for Industrial Ethernet	4.8 - 4.9
DeviceNet-cables for use in C-track chains, Bus cables for AS-Interface	up to 4.10



Chapter 5: Robot cables	5.1
Overview Robot cables	5.2 - 5.3
PUR control cables for use in Robots, shielded PUR-cables for use in Robots, PUR Bus- and Signal cables for us in Robots	up to 5.4



Chapter 6: Control Cables	6.1
Overview Control Cables	6.2 - 6.3
PUR Control Cables	6.4 - 6.5
PUR Handheld tool and device cables	6.6
PVC Control Cables	6.7 - 6.12
PVC Control Cables with Steel braiding	6.15
UL-listed PVC Control cables	6.13 - 6.14
PVC Control cables for Special applications	6.16 - 6.19

Download the latest
technical information
from www.luetze.com!

Our General Terms of Business and Terms of Payment shall apply for all contracts and orders (AGBs).
You can find these on our homepage at www.luetze.com.



Chapter 7: Electronic cables	7.1
Overview Electronic cables	7.2 - 7.3
Halogen free Electronic cables	7.4 - 7.7
PVC Electronic cables according to US standard	7.8 - 7.9
PVC Electronic cables	7.10 - 7.13
PUR Actuator sensor cables	7.14



Chapter 8: Temperature-resistant cables	8.1
Overview Temperature-resistant cables	8.2 - 8.3
Temperature-resistant crosslinked control cables	8.4
Silicon control cables	8.5 - 8.7
Glass-fibre protected high temperature single conductor	8.8
Fluoropolymer single cable	8.9



Chapter 9: Actuator sensor interface	9.1
Actuator sensor box M8 / M12	9.5 - 9.13
Field BUS cables M12	9.14 - 9.24
Actuator sensor cables M8/M12	9.25 - 9.53
Actuator sensor cables M12 - Valve suppressors	9.54 - 9.57
Circular connectors M8 / M12	9.58 - 9.69
Connectors M8 / M12	9.70 - 9.72
Panel connector USB / RJ45	9.73 - 9.75
Accessories Actuator sensor	9.76 - 9.77



Chapter 10: Cable fittings and accessories	10.1
Overview cable glands	10.2 - 10.3
Technical information	10.4 - 10.5
Cable glands	10.6 - 10.10
Plastic fittings and Plastic accessories	10.11 - 10.22
Metal fittings and Metal accessories	10.23 - 10.45
Technical information Cable conduits	10.47
Overview Cable conduits	10.48 - 10.49
Cable conduits and accessories	10.50 - 10.86
Chemical resistance for Polyamide	10.76
Mounting accessories and tools	10.87 - 10.93
Labelling systems	10.94 - 10.103



Chapter 11: EMC accessories	11.1
EMC shield rails, EMC shield elements	
flat-earthing, cable clips	up to 11.2



Chapter 12: C-tracks	12.1
Energy Supply Chains - General	12.2
Plastic mono-chain KM	12.3
Plastic mono-chain KK	12.4
Plastic plate chain, KL model series	12.5
Steel plate chain, SL model series	12.6

Chapter 13: Technical Information	13.1
--	-------------

Download the latest
technical information
from www.luetze.com!

Our General Terms of Business and Terms of Payment shall apply for all contracts and orders (AGBs).
You can find these on our homepage at www.luetze.com.

Contents

1 Cable packaging

Acc. to SIEMENS-6FX8002 standard	
Base cable DRIVE-CLIQ®	1.5
Acc. to SIEMENS-6FX8002 standard	
Base cable DRIVE-CLIQ®	1.6
Acc. to SIEMENS-6FX8002 standard	
Base cable DRIVE-CLIQ®	1.7
Acc. to SIEMENS-6FX8002 standard	
Base cable	1.8
Acc. to SIEMENS-6FX8002 standard	
Base cable DRIVE-CLIQ®	1.9
Similar to SIEMENS-6FX5002 standard, but with PUR jacket	
Base cable	1.10
Acc. to SIEMENS-6FX5002 standard	
Base cable	1.11
Acc. to SIEMENS-6FX8002 standard	
Extension	1.12
Similar to SIEMENS-6FX5002 standard but with PUR jacket	
Extension	1.13
Acc. to SIEMENS-6FX5002 standard	
Extension	1.14
Acc. to SIEMENS-6FX2002 standard	
Base cable	1.15
Acc. to SIEMENS-6FX8002 standard	
Base cable	1.16
Acc. to SIEMENS-6FX8002 standard	
Base cable DRIVE-CLIQ®	1.17
Acc. to SIEMENS-6FX8002 standard	
Extension	1.18
Acc. to SIEMENS-6FX8002 standard	
Base cable	1.19
Similar to SIEMENS-6FX5002 standard, but with PUR jacket	
Base cable	1.20
Acc. to SIEMENS-6FX8002 standard	
Extension	1.21
Similar to SIEMENS-6FX5002 standard but with PUR jacket	
Extension	1.22
Acc. to SIEMENS-6FX8002 standard	
Base cable DRIVE-CLIQ®	1.23
Similar to SIEMENS-6FX5002 standard, but with PUR jacket	
Base DRIVE-CLIQ®	1.24
According to INDRAMAT standard	1.25
According to INDRAMAT standard	1.26
According to INDRAMAT standard	1.27
According to LENZE-Standard	1.28
According to LENZE-Standard	1.29
According to LENZE-Standard	1.30
According to LENZE-Standard	1.31
According to SEW standard	1.32
According to SEW standard	1.33
According to SEW standard	1.34
According to SEW standard	1.35
According to SEW standard	1.36
According to SEW standard	1.37
According to SEW standard	1.38
S7 Plug	
For Siemens Simatic PLC/S7	1.39
Patch cable Cat 5E / Cat 6	1.40
USB 3.0	1.41
LÜTZE PURFLEX	1.42

2 C-track cables

LÜTZE SUPERFLEX® PLUS N PUR UL 300 V	2.4
--------------------------------------	-----

LÜTZE SUPERFLEX® PLUS N PUR UL 600 V	2.5
LÜTZE SUPERFLEX® PLUS N (C)PUR UL 300 V	2.6
LÜTZE SUPERFLEX® PLUS N (C)PUR UL 600 V	2.7
LÜTZE SUPERFLEX® N TPE	2.8
LÜTZE SUPERFLEX® N (C) TPE	2.9
LÜTZE SUPERFLEX® N	2.10
LÜTZE SUPERFLEX® N (C)Y	2.11
LÜTZE SUPERFLEX® N MTW	2.12
LÜTZE SUPERFLEX® N (C)Y MTW	2.13
LÜTZE SUPERFLEX® N cULus	2.14
LÜTZE SUPERFLEX® N ORC	2.15
LÜTZE SUPERFLEX® TRONIC AS PUR	
LÜTZE SUPERFLEX® ASB PUR KOMBI	2.16
LUTZE-SUPERFLEX® TRONIC PUR	2.17
LÜTZE SUPERFLEX® TRONIC (C)PUR	2.18
LÜTZE SUPERFLEX® TRONIC (C)PUR TP	2.19
LÜTZE SUPERFLEX® TRONIC	2.20
LÜTZE SUPERFLEX® TRONIC (C)Y	
LÜTZE SUPERFLEX® TRONIC (C)Y TP	2.21

3 Servo conductors

LÜTZE SUPERFLEX® PLUS M (C) PUR 0.6/1kV	
Motor/Power supply cable	3.4
LÜTZE SUPERFLEX® PLUS M (C) PUR SERVO 0.6/1kV	
Supply Line Motor/Brake	3.5
LÜTZE SUPERFLEX® PLUS M PUR 0.6/1 kV	
Motor/Power supply cable	3.6
LÜTZE SUPERFLEX® PLUS PUR 0.6/1kV	
LÜTZE SUPERFLEX® PLUS (C) PUR 0.6/1kV	
Motor/Power supply cable	3.7
LÜTZE SUPERFLEX® PLUS (C) PUR SERVO	
Feedback cables cULus	3.8
LÜTZE SUPERFLEX® PLUS (C) PUR SERVO	
Feedback cables cULus	3.9
LÜTZE SUPERFLEX® PLUS (C) PUR SERVO	
Feedback cables	3.10
LÜTZE-SILFLEX® M (C) PUR SERVO 0.6/1 kV	
With or without shielded control pair	3.11
LÜTZE-SILFLEX® M (C)Y PVC SERVO 0.6/1 kV	
With or without shielded control pair(s)	3.12
LÜTZE-SILFLEX® (C) Y SERVO	
LÜTZE-SILFLEX® (C) PUR SERVO	3.13

4 Bus and network cables

LÜTZE SUPERFLEX® BUS (C) PUR	
Profibus	4.4
LÜTZE ELECTRONIC BUS (C)	
Profibus	4.5
LÜTZE SUPERFLEX® BUS (C)PUR	
CAN-BUS, INTERBUS	4.6
LÜTZE ELECTRONIC BUS (C) Y	
CAN-BUS, INTERBUS	4.7
LÜTZE SUPERFLEX® ETHERNET BUS (C) PUR	
LÜTZE ELECTRONIC ETHERNET BUS (C) PUR	
LÜTZE ELECTRONIC ETHERNET BUS (C) PVC	4.9
LÜTZE SUPERFLEX® DeviceNet™ (C) PUR	4.10
LÜTZE ELECTRONIC ASI BUS	4.11

5 Robot cables

LÜTZE SUPERFLEX® PLUS ROBOT N PUR	5.4
LÜTZE SUPERFLEX® PLUS ROBOT N (D) PUR	
LÜTZE SUPERFLEX® PLUS ROBOT N (D) PUR SERVO	5.5
LÜTZE SUPERFLEX® PLUS ROBOT (D) PUR	
BUS cables, servo encoder cables	5.6

6 Control cables

LÜTZE-SILFLEX® N PUR	6.4
LÜTZE-SILFLEX® N (C)PUR, without inside jacket	6.5

Contents

LÜTZE-SILFLEX® PUR ORANGE, coloured conductors	6.6	Plug M12 4pin. straight, A coded	9.13
LÜTZE-SILFLEX® N	6.7	Housing material PVC black	9.13
LÜTZE-SILFLEX® N	6.8	Male M12 straight with PUR cable, shielded 360°, open end	9.14
LÜTZE-SILFLEX® B	6.9	self-locking screwed connection	9.14
LÜTZE-SILFLEX® N (C) Y	6.10	c-track compatible, halogen free	9.14
LÜTZE-SILFLEX® N (C) Y TR	6.11	Female M12 straight with PUR cable, shielded 360°, open end	9.15
LÜTZE-SILFLEX® (C) VFD PVC 0.6/1kV	6.12	self-locking screwed connection	9.15
LÜTZE-SILFLEX® Tray-ER PVC, unshielded	6.13	c-track compatible, halogen free	9.15
LÜTZE SILFLEX® (C) Tray-ER PVC, shielded	6.14	Male-female M12 straight with PUR cable, shielded 360°	9.16
LÜTZE-SILFLEX® NSY	6.15	self-locking screwed connection	9.16
LÜTZE-SILFLEX® ORC	6.16	c-track compatible, halogen free	9.16
LÜTZE-SILFLEX® EN		Male M12 straight with PUR cable, shielded 360°, open end	9.17
LÜTZE-SILFLEX® EN (C) Y	6.17	self-locking screwed connection	9.17
LÜTZE-SILFLEX® QUAD N (H05VV5-F)	6.18	c-track compatible, halogen free	9.17
LÜTZE-SILFLEX® QUAD N (C)Y (H05VVC4V5-K)	6.19	Female M12 straight with PUR cable, shielded 360°, open end	9.18
		self-locking screwed connection	9.18
		c-track compatible, halogen free	9.18
		Male-female M12 straight with PUR cable, shielded 360°	9.19
		self-locking screwed connection	9.19
		c-track compatible, halogen free	9.19
		Male M12 straight with PUR cable, shielded 360°, open end	9.20
		self-locking screwed connection	9.20
		Halogen free	9.20
		Male M12 straight on male M12 straight with PUR cable, shielded 360°	9.21
		self-locking screwed connection	9.21
		Halogen free	9.21
		Male M12 straight with PUR cable, shielded 360°, end open	9.22
		self-locking screwed connection	9.22
		c-track compatible, halogen free	9.22
		Female M12 straight with PUR cable, shielded 360°, end open	9.23
		self-locking screwed connection	9.23
		c-track compatible, halogen free	9.23
		Male-female M12 straight with PUR cable, shielded 360°	9.24
		self-locking screwed connection	9.24
		c-track compatible, halogen free	9.24
		Male M8 straight with PUR cable, open end	9.25
		self-locking screwed connection	9.25
		c-track compatible, halogen free	9.25
		Male M8 straight with PUR cable, shielded 360°, open end	9.26
		self-locking screwed connection	9.26
		c-track compatible, halogen free	9.26
		Female M8 straight with PUR cable, open end	9.27
		self-locking screwed connection	9.27
		c-track compatible, halogen free	9.27
		Female M8 straight with PUR cable, shielded 360°, open end	9.28
		self-locking screwed connection	9.28
		c-track compatible, halogen free	9.28
		Female M8 angled with PUR cable, open end	9.29
		self-locking screwed connection	9.29
		c-track compatible, halogen free	9.29
		Female M8 angled with PUR cable, shielded 360°, open end	9.30
		self-locking screwed connection	9.30
		c-track compatible, halogen free	9.30
		Female M8 angled with 2 LED's and PUR cable, open end	9.31
		self-locking screwed connection	9.31
		c-track compatible, halogen free	9.31
		Male M12 straight with PUR cable, open end	9.32
		self-locking screwed connection	9.32
		c-track compatible, halogen free	9.32
		Male M12 straight with PUR cable, open end	9.33
		self-locking screwed connection	9.33
		c-track compatible, halogen free	9.33
		Male M12 straight with PUR cable, shielded 360°, open end	9.34
		self-locking screwed connection	9.34
		c-track compatible, halogen free	9.34
		Male M12 straight with PUR cable, shielded 360°, open end	9.35
		self-locking screwed connection	9.35
7 Electronic cables			
HALOGENFLEX D(C)PUR	7.4		
HALOGENFLEX D (C)PUR TP	7.5		
HALOGENFLEX LIH (C) H-D	7.6		
HALOGENFLEX LIH (C) H-D TP	7.7		
LÜTZE ELECTRONIC LiYY AWG	7.8		
LÜTZE ELECTRONIC LiY(C)Y AWG	7.9		
LÜTZE ELECTRONIC LiYY	7.10		
LÜTZE ELECTRONIC LiY (C)Y	7.11		
LÜTZE ELECTRONIC LiY (C)Y	7.12		
LÜTZE ELECTRONIC LiY (C)Y TP	7.13		
LÜTZE ELECTRONIC PUR AS	7.14		
8 Temperature-resistant cables			
LÜTZE THERMOFLEX TH 150	8.4		
LÜTZE SILICON SIHF	8.5		
LÜTZE SILICON SIHFP	8.6		
LÜTZE SILICON SIF	8.7		
LÜTZE NICKEL BRAID GL	8.8		
LÜTZE PTFE single conductor			
LÜTZE FEP single conductor	8.9		
9 Actuator sensor interface			
M 8 – Actuator sensor boxes – IP 68 with LED indication and connected PUR cable	9.5		
4-way, 6-way, 8-way / 3-pole	9.5		
c-track compatible	9.5		
M 8 – Actuator sensor boxes – IP 68 with LED indication and connected PUR cable	9.6		
10-way, 12-way / 3-pole	9.6		
c-track compatible	9.6		
M 8 – Actuator sensor boxes – IP 68 with LED indication	9.7		
8-way / 3-pole, wireable	9.7		
M 12 – Actuator sensor boxes – IP 68 with LED indication and connected PUR cable	9.8		
4-way, 8-way / 3-pole + PE	9.8		
c-track compatible	9.8		
M 12 – Actuator sensor boxes – IP 68 with LED indication and connected PUR cable	9.9		
4-way, 8-way / 4-pole + PE	9.9		
c-track compatible	9.9		
M 12 – Actuator sensor boxes – IP 68 with LED indication	9.10		
4-way, 8-way / 3-pole + PE, wireable	9.10		
	9.10		
M 12 – Actuator sensor boxes – IP 68 with LED indication	9.11		
4-way, 8-way / 4-pole + PE, wireable	9.11		
	9.11		
Actuator sensor box 8-gang, M12 female, stainless steel housing with diagnostic function	9.12		
for the food industry with function and diagnostic indicator fixed connection PVC cable, line end open	9.12		
Terminating resistor 33 kΩ / 0.125 Watt	9.12		

Contents

Cablefix Vario		Protective conduit fitting Condufix OA PM	
Feed-through for all prefabricated cables and wires with connectors	10.7	45°-angle design with metal threads	10.64
Cablefix		Protective conduit fitting Condufix OI PM	
Control cable flange (ST)	10.8	Straight design with internal thread out of metal	10.65
Cablefix		Protective conduit fitting Condufix OZ PM	
Bus flange (B/V)	10.9	Straight design with integrated cable nontension out of metal	10.66
Cablefix		Protective conduit fitting Condufix OF PA	
Sensor/Actuator flange (S/A)	10.10	90°-flange angle design	10.67
Plastic fittings TOP-T-P metric	10.11	Protective conduit fitting Condufix OF PA for NW 70 and NW 95	
Plastic fittings TOP-T-P	10.12	Straight and 90°-flange angle design	10.68
Plastic fitting TOP-TR-P	10.13	Protective conduit splitter Condufix OY PA, Y design	10.69
Plastic fitting TOP-K Ex metric	10.14	Protective conduit splitter Condufix OT PA, T design	10.70
Plastic fitting TOP-T-KS metric	10.15	Flat seal for Condufix screw connections, FDNP	10.71
Plastic elbow fitting AW-P	10.16	O-rings for Condufix cable protective conduits and flange angle, OBNR and WNBR	10.72
Plastic elbow fitting AWK-P	10.17	Plastic accessory GK metric	10.73
Plastic accessory RR Form 1, metric	10.18	Plastic accessory GK	10.74
Plastic accessories RR Form 1 PG	10.19	Metal accessory GMS	10.75
Plastic accessories RR Form 2	10.20	CONDUFLEX CONDUIT CF EL	10.77
Plastic accessory EW	10.21	CONDUFIX CONDUIT CX PP	10.78
Plastic accessory BL	10.22	CONDUFLEX CONDUIT CF NM	10.79
Metal fitting TOP-T	10.23	CONDUFLEX CONDUIT CF V	10.80
Metal fitting TOP-TR	10.24	CONDUFLEX CONDUIT CF VS	10.81
Metal fitting with shield termination TOP-T-S-EMV1	10.25	WELLFLEX CONDUIT WF	10.82
Metal fitting with shield termination TOP-T-S-EMV2	10.26	Plastic conduit holder WFH	10.83
Metal fittings TOP-M EExe	10.27	Metal conduit nipple CF WD	10.84
Metal fittings WD	10.28	Metal conduit nipple CF	10.85
Metal fitting 6KM	10.29	Metal conduit clamp SL	10.86
Metal fittings ZEV	10.30	Control panel installation	10.87
Metal fittings ZED	10.31	Cu grounding strap	10.88
Metal fitting ZEV2	10.32	Cable bundler	10.89
Metal fitting with shield termination ZEV2-S	10.33	Spiral band	10.90
Metal fitting ZED2	10.34	Cable tie	10.91
Metal fitting FKV	10.35	Ribbon tie FCM	10.92
Metal connection elbow AW	10.36	Tools	10.93
Metal connection elbow AWK	10.37	Multimark marking collars, halogen-free/Multimark marker	10.94
Metal accessory GMS EMV	10.38	Wire and cable marking	10.95
Metal accessory RR		Wire and cable marking	10.96
metric to PG	10.39	Wire and cable marking	10.97
Metal accessory EW	10.40	Rail for marker holders/marker holder	10.98
Metal accessory RR	10.41	Identification of hook-up wires and cables	10.99
Metal accessory EW		Laser labels	10.100
metric to PG	10.42	Marker strips	10.101
Metal accessory BLMS	10.43	Cable marker	10.102
Plastic and metal accessories MFDE	10.44	Wire markers LKZ	10.103
Plastic and metal accessories ASI DE	10.45		
Cable protective conduit Condufix OL PA, light weight type	10.50	11 EMC accessories	
Cable conduit Condufix OS PA, standard style	10.51	Inhaltsseite_1	11.2
Cable conduit Condufix OV PA, reinforced style	10.52	EMC shield rail	11.3
Cable conduit Condufix OR PA, robot style	10.53	EMC shield rail with cable clamping options for a wide variety of shield clamps	11.3
Cable conduit-retainer Condufix OH PA	10.54	Mounting bracket	11.4
Cable conduit-retainer Condufix OH St	10.55	Mounting bracket for fastening the EMC rail in the control cabinet	11.4
Protective conduit fitting Condufix OG PA		EMC shield rail	11.5
Straight design	10.56	EMC shield rail with cable clamping options for a wide variety of shield clamps	11.5
Protective conduit fitting Condufix OG PA		Bracket	11.6
Straight design	10.57	Retaining bracket for fastening the EMC rail	11.6
Protective conduit fitting Condufix OG PM		Shield clamp	11.7
Straight design with metal threads	10.58	Spring shield clamp	11.8
Protective conduit fitting Condufix OG PM		Shield connection for large-diameter cables	11.8
Straight design with metal threads	10.59	Snap-on element for snapping onto hat rail for attaching a screening clamp	11.9
Protective conduit fitting Condufix OW PA		Snap-on element can be snapped onto LSC profiles	11.10
90°-angle design	10.60	Earthing strip, copper braiding, tin-plated	11.11
Protective conduit fitting Condufix OB PA		Single wire Cu ETP UNI 5649-71, similar to DIN 72333	11.11
90°-arc angle design	10.61		
Protective conduit fitting Condufix OB PM			
90°-arch angle design with metal threads	10.62		
Protective conduit fitting Condufix OA PA			
45°-angle design	10.63		

Contents

Earthing strip, copper braiding, tin-plated	11.12
Single wire Cu ETP UNI 5649-71, similar to DIN 72333	11.12
Cable clip	11.13

12 C-tracks

13 Technical information


14 Questionnaires

15 Article number list

Our General Terms of Business and Terms of Payment shall apply for all contracts and orders (AGBs).⁷

You can find these on our homepage at www.luetze.com

1. Cable assemblies

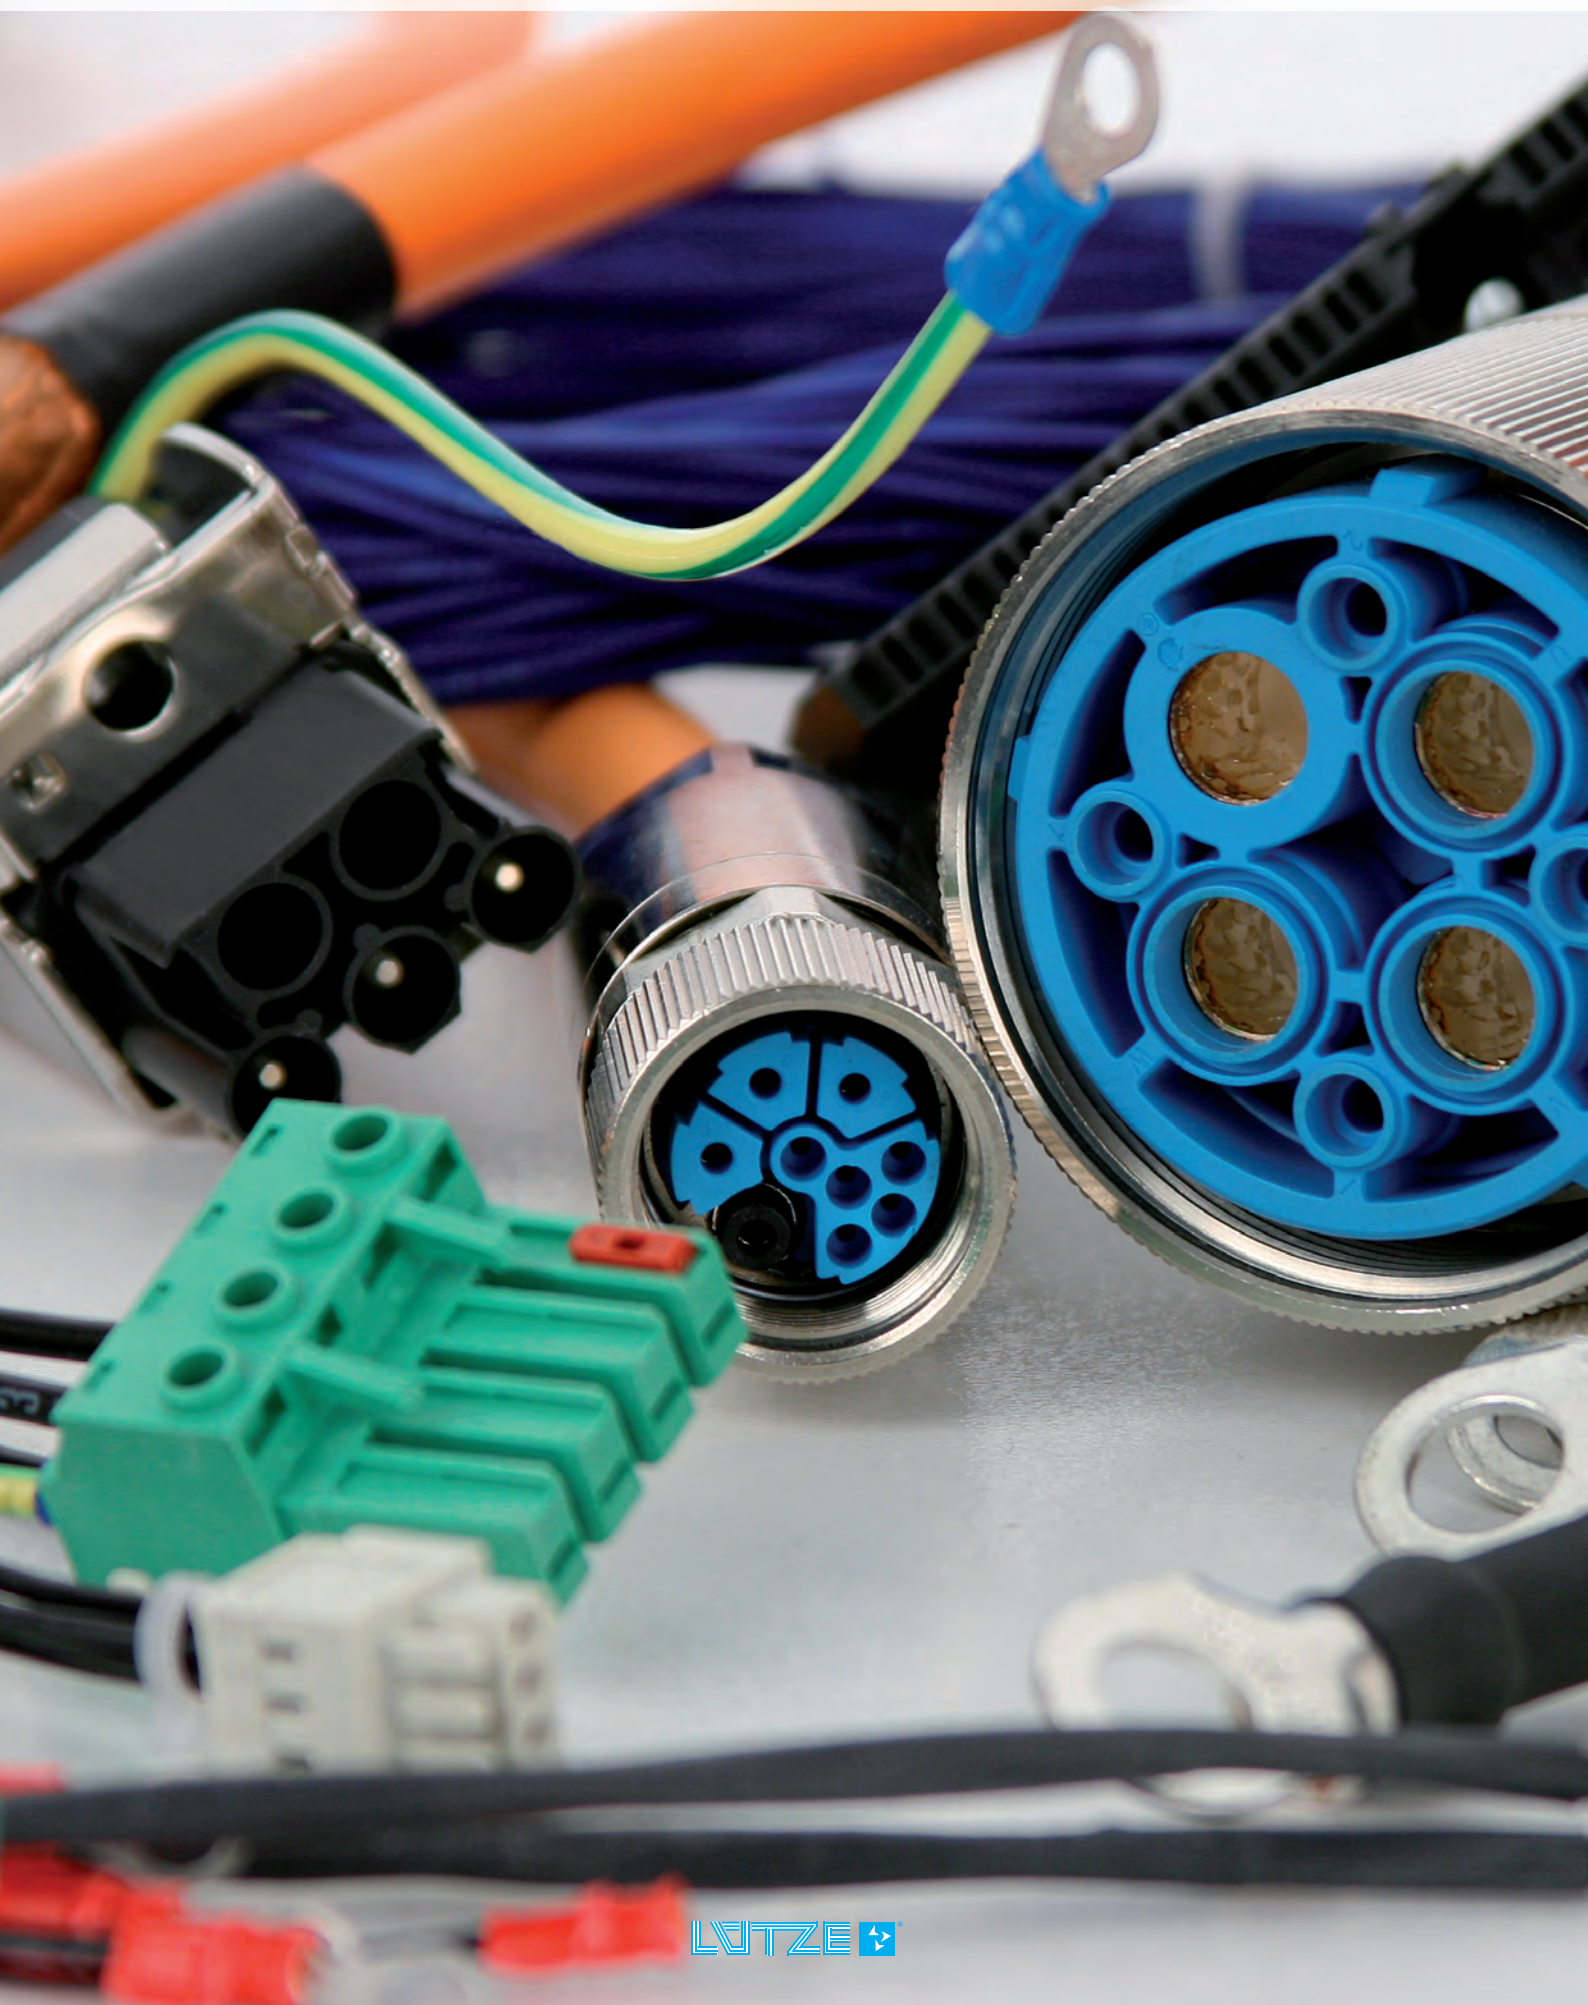

Cable assemblies for Servo drive systems



Siemens standard



Bosch-Rexroth



Lenze



SEW

According to SIEMENS standard

Motor base cables	Motor extensions	Feedback base cables	Feedback extensions	DRIVE-CLIQ	without brake	with brake	6FX8002	6FX5002	6FX2002	Suitable for C-Tracks	Fixed	Page
●				●	●		●			●		1.5
●				●		●	●			●		1.6/1.9
●				●		●		●			●	1.7/up to 1.10
●					●	●	●			●		1.8
●						●	●			●		up to 1.16
●						●			●	●		1.15
	●					●	●			●		1.12
	●					●		●			●	up to 1.13
	●				●		●			●		1.18
		●		●			●			●		1.23
		●		●				●			●	1.24
		●					●			●		1.19
		●						●			●	1.20
			●				●			●		1.21
			●					●			●	1.22

According to Bosch-Rexroth standard (INDRAMAT)

Motor base cables	Motor extensions	Feedback base cables	Feedback extensions	IKG ...	RKL ...	IKS ...	RIKG ...	Suitable for C-Tracks	Fixed	Page
●				●				●		1.25
●					●			●		1.26
		●				●	●	●		1.27

According to LENZE standard

Motor base cables	Motor extensions	Feedback base cables	Cable for ventilator	EWLM ...	EYP ...	EWLR ...	EYF ...	EWLL ...	EYL ...	Suitable for C-Tracks	Fixed	Page
●				●	●					●	●	1.28
		●				●	●			●	●	up to 1.29
			●					●	●	●	●	1.31

According SEW standard

Motor base cables	Motor extensions	Feedback base cables	without brake	with brake	CMP	CM	Suitable for C-Tracks	Fixed	Page
●			●	●	●		●	●	1.32
●			●			●		●	1.34
●				●		●		●	1.35
	●		●	●	●			●	1.33
	●			●		●		●	1.36
	●		●			●		●	1.37
		●			●	●		●	1.38

These assemblies can be supplied in any length and with customer-specific changes.

Preassembled Connecting Cables



S7 front-end plug



Patch cable



USB 3.0



Spiral Cables

Preassembled Connecting Cables S7 front-end plug. For Siemens Simatic SPS/S7

Type: 392 1AJ	Type: 392 1AM	Type: 492 1AL	20 poles	40 poles	48 poles	Cross section 0,5/0,75/1,0 mm ²	3,0 m Length	5,0 m Length						Page
●			●			●	●	●						1.39
	●			●		●	●	●						1.39
		●			●	●	●	●						1.39

Patch Cable shielded. Cat.5e / Cat 6

Available Lengths: 0,5 - 1,0 - 1,5 - 2,0 - 3,0 - 5,0 - 7,5 - 10,0 - 15,0 - 20,0 - 30,0

Cat 5e	Cat 6	1:1	Crossover	grey	blue	green	yellow	red	black		Suitable for C-Tracks	Fixed	Page
●		●		●	●	●	●	●	●			●	1.40
●			●	●		●						●	1.40
●		●					●				●		1.40
	●	●		●		●	●					●	1.40
	●		●	●									1.40
	●	●						●			●		1.40

USB 3.0 (Super-Speed)

Available Lengths: 1,0 - 2,0 - 3,0 m



Type A/A	Type A/B	Type B/B	Type Micro B/A	Male/Male	Male/Female	blue	black				Fixed	Page
●				●		●					●	1.41
●					●	●					●	1.41
	●			●		●					●	1.41
		●		●		●					●	1.41
			●	●			●				●	1.41

Spiral Cables unshielded

3x 1,5 mm ²	4x 1,5 mm ²	5x 1,5 mm ²	7x 1,5 mm ²	12x 1,5 mm ²	2,25 m extension length	4,0 m extension length	5,75 m extension length	7,50 m extension length					Page
●					●	●	●	●					1.42
	●				●	●	●	●					1.42
		●			●	●	●	●					1.42
			●		●	●	●	●					1.42
				●	●	●	●	●					1.42

Energy supply systems - as perfect as your planning and the components used!



Solutions for your assembly tasks

LÜTZE makes it easy for you, even with complex cable sets. All components are selected and assembled according to your individual requirements. External assembly in this way reduces the workload for your internal administration from the order all the way through to the invoice!



Cable assembly for servo drive systems

Lütze assembles cables that are 100-percent compatible with the Siemens, BOSCH-REXROTH, LENZE AND SEW standards.

Customised lengths can also be supplied on very short notice without a minimum order quantity.



S7

Application: wiring of SIEMENS SIMATIC SPS/S7

Characteristics: composite strand with S7 connector, completely wired, 2. cables run at 90° to connector

Design 1: completely compatible with SIEMENS, colour of strands dark blue RAL5010,



Patch cable Cat 5 / Cat 6

Design: fully compatible with IEC 60603-7

1:1 wiring: cable and sleeves in the same colour. Following colours available: grey, green, blue, yellow, red, black.

Crossover wiring: cable grey, sleeves red

Cable carrier suitable PUR: cable and sleeves bright yellow

Additional designs on request



Customer-specific assemblies

- your connection-ready cable sets are created in accordance with your company's specifications.
- pre-assembly of all cables with any common brand of connector
- overmoulded connector designs on request

Order Informations for Cable Assemblies

- No minimum order amount
- All intermediate lengths in 0.5 m steps are available in a short time
- When ordering, please indicate base number and length code
- Other types on request

The Lütze Art.-No. consists of two blocks:

■ Technical design of the cable assembly

■ Length code in cm

Ex: 198360.0500 corresponds to a length of 5.0 m

Technical design

Length code in cm

198360 . 0500

PUR servo cable assemblies without brake cores for c-tracks

Acc. to SIEMENS-6FX8002 standard Base cable DRIVE-CLIQ®



Application

- Base cable DRIVE-CLIQ®, for SIEMENS SERVO drives
- Through full PUR jacket and TPE conductor insulation optimally suited for cable carriers, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Special features:

- No minimum order quantity
- All intermediate lengths in steps of 0.5 m are available within a short time
- When ordering, please specify serial number and length key
- Additional types on request

Technical data

UL approval	1000 V 80 °C
Voltage	
U ₀ /U	0.6/1.0 kV
Insulation resistance	min. 500 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 10
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

Part-No.	SIEMENS designation	Length m	Number of strands/cross-section	Outer-∅ approx. mm
Base cable DRIVE-CLIQ®				
198326.1000	6FX8002-5CN01-1BA0*	10.0	(4×1.5)	8.0
198327.1000	6FX8002-5CN11-1BA0*	10.0	(4×2.5)	9.6
198328.1000	6FX8002-5CN21-1BA0*	10.0	(4×1.5)	8.0
198329.1000	6FX8002-5CN31-1BA0*	10.0	(4×2.5)	9.6
198330.1000	6FX8002-5CN41-1BA0*	10.0	(4×4.0)	11.1
198331.1000	6FX8002-5CN51-1BA0*	10.0	(4×6.0)	13.4
198332.1000	6FX8002-5CN61-1BA0*	10.0	(4×10.0)	16.7

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PUR servo cable assemblies with brake cores for cable carriers

Acc. to SIEMENS-6FX8002 standard Base cable DRIVE-CLIQ®



Application

- Base cable DRIVE-CLIQ®, for SIEMENS SERVO drives
- Through full PUR jacket and TPE conductor insulation optimally suited for cable carriers, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments, machines and plants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Special features:

- No minimum order quantity
- All intermediate lengths in steps of 0.5 m are available within a short time
- When ordering, please specify serial number and length key
- Additional types on request

Technical data

UL approval	1000 V 80 °C
Voltage	
U ₀ /U	0.6/1.0 kV
Insulation resistance	min. 500 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 10
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

Part-No.	SIEMENS designation	Length m	Number of strands/cross-section	Outer-∅ approx. mm
Base cable DRIVE-CLIQ®				
198333.1000	6FX8002-5DN01-1BA0*	10.0	(4×1.5)+(2×1.5)	10.5
198334.1000	6FX8002-5DN11-1BA0*	10.0	(4×2.5)+(2×1.5)	12.1
198335.1000	6FX8002-5DN21-1BA0*	10.0	(4×1.5)+(2×1.5)	10.5
198336.1000	6FX8002-5DN31-1BA0*	10.0	(4×2.5)+(2×1.5)	12.1
198337.1000	6FX8002-5DN41-1BA0*	10.0	(4×4.0)+(2×1.5)	13.6
198338.1000	6FX8002-5DN51-1BA0*	10.0	(4×6.0)+(2×1.5)	15.5
198339.1000	6FX8002-5DN61-1BA0*	10.0	(4×10.0)+(2×1.5)	18.3

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PVC servo cable assemblies with brake cores for hard wiring

Acc. to SIEMENS-6FX8002 standard Base cable DRIVE-CLIQ®



Application

- Base cable DRIVE-CLIQ®, for SIEMENS SERVO drives
- For flexible application without compulsory guide
- More cost-effective alternative to the cable carrier suitable 6FX8002 version

Properties

- PVC Flame-retardant, self-extinguishing
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Special features:

- No minimum order quantity
- All intermediate lengths in steps of 0.5 m are available within a short time
- When ordering, please specify serial number and length key
- Additional types on request

Technical data

Voltage

U_0/U 0.6/1.0 kV

Insulation resistance min. 20 MΩ x km

Temperature range

moving -5 °C to +70 °C
fixed -25 °C to +70 °C

Design

- Jacket colour orange RAL 2003

Part-No.	SIEMENS designation	Length m	Number of strands/cross- section	Outer-Ø approx. mm
Base cable DRIVE-CLIQ®				
198340.1000	6FX5002-5DN01-1BA0*	10.0	(4×1.5)+(2×1.5)	12.5
198341.1000	6FX5002-5DN11-1BA0*	10.0	(4×2.5)+(2×1.5)	14.1
198342.1000	6FX5002-5DN21-1BA0*	10.0	(4×1.5)+(2×1.5)	12.5
198343.1000	6FX5002-5DN31-1BA0*	10.0	(4×2.5)+(2×1.5)	14.1
198344.1000	6FX5002-5DN41-1BA0*	10.0	(4×4.0)+(2×1.5)	15.8
198345.1000	6FX5002-5DN51-1BA0*	10.0	(4×6.0)+(2×1.5)	16.7
198346.1000	6FX5002-5DN61-1BA0*	10.0	(4×10.0)+(2×1.5)	19.1

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PUR servo cable assemblies with brake cores for cable carriers

Acc. to SIEMENS-6FX8002 standard Base cable



Application

- Base cable, for Siemens servo drives
- Through full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments, machines and plants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

UL approval	1000 V 80 °C
Voltage	
U_0/U	0.6/1.0 kV
Insulation resistance	min. 500 MΩ x km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D x 10
fixed	D x 6
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

Part-No.	SIEMENS designation	Length m	Number of strands/cross-section	Outer-∅ approx. mm
Base cable				
198460.1000	6FX8002-5DA01-1BA0*	10.0	(4x1.5+(2x1.5))	10.5
198480.1000	6FX8002-5DA11-1BA0*	10.0	(4x2.5+(2x1.5))	12.1
198500.1000	6FX8002-5DA21-1BA0*	10.0	(4x1.5+(2x1.5))	10.5
198530.1000	6FX8002-5DA31-1BA0*	10.0	(4x2.5+(2x1.5))	12.1
198560.1000	6FX8002-5DA41-1BA0*	10.0	(4x4+(2x1.5))	13.6
198570.1000	6FX8002-5DA51-1BA0*	10.0	(4x6+(2x1.5))	15.5
198580.1000	6FX8002-5DA61-1BA0*	10.0	(4x10+(2x1.5))	18.3
198470.1000	6FX8002-5DA02-1BA0*	10.0	(4x2.5+(2x1.5))	12.1
198490.1000	6FX8002-5DA12-1BA0*	10.0	(4x4+(2x1.5))	13.6
198510.1000	6FX8002-5DA22-1BA0*	10.0	(4x6+(2x1.5))	15.5
198540.1000	6FX8002-5DA32-1BA0*	10.0	(4x10+(2x1.5))	18.3
198870.1000	6FX8002-5DA23-1BA0*	10.0	(4x16+(2x1.5))	21.4
198880.1000	6FX8002-5DA33-1BA0*	10.0	(4x25+(2x1.5))	27.8
198075.1000	6FX8002-5DG01-1BA0*	10.0	(4x1.5+(2x1.5))	10.5
198085.1000	6FX8002-5DG11-1BA0*	10.0	(4x2.5+(2x1.5))	12.1
198080.1000	6FX8002-5DG21-1BA0*	10.0	(4x1.5+(2x1.5))	10.5
198090.1000	6FX8002-5DG31-1BA0*	10.0	(4x2.5+(2x1.5))	12.1
198095.1000	6FX8002-5DG41-1BA0*	10.0	(4x4+(2x1.5))	13.6
198100.1000	6FX8002-5DG51-1BA0*	10.0	(4x6+(2x1.5))	15.5
198115.1000	6FX8002-5DG61-1BA0*	10.0	(4x10+(2x1.5))	18.3

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PUR servo cable assemblies with brake cores for cable carriers

Acc. to SIEMENS-6FX8002 standard Base cable DRIVE-CLIQ®



Application

- Base cable DRIVE-CLIQ®, for Siemens servo drives
- Through full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments, machines and plants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

UL approval	1000 V 80 °C
Voltage	
U_0/U	0.6/1.0 kV
Insulation resistance	min. 500 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 10
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

Part-No.	SIEMENS designation	Length m	Number of strands/cross- section	Outer-∅ approx. mm
Base cable DRIVE-CLIQ®				
198310.1000	6FX8002-5DS01-1BA0*	10.0	(4×1.5+(2×1.5))	10.5
198311.1000	6FX8002-5DS11-1BA0*	10.0	(4×2.5+(2×1.5))	12.1
198312.1000	6FX8002-5DS21-1BA0*	10.0	(4×1.5+(2×1.5))	10.5
198313.1000	6FX8002-5DS31-1BA0*	10.0	(4×2.5+(2×1.5))	12.1
198314.1000	6FX8002-5DS41-1BA0*	10.0	(4×4+(2×1.5))	13.6
198315.1000	6FX8002-5DS51-1BA0*	10.0	(4×6+(2×1.5))	15.5
198316.1000	6FX8002-5DS61-1BA0*	10.0	(4×10+(2×1.5))	18.3

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PUR servo cable assemblies with brake cores for hard wiring

Similar to SIEMENS-6FX5002 standard, but with PUR jacket
Base cable



Application

- Base cable, for Siemens servo drives
- For flexible application without compulsory guide
- Cost-effective alternative to the cable carrier suitable 6FX8002 version

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

Voltage

U_0/U 0.6/1.0 kV

Insulation resistance

min. 100 M Ω × km

Temperature range

moving -25 °C to +80 °C

fixed -40 °C to +80 °C

Burning behaviour

Flame-retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1

Part-No.	SIEMENS designation	Length m	Number of strands/cross-section	Outer- \varnothing approx. mm
Base cable				
198462.1000	6FX5002-5DA01-1BA0*	10.0	(4×1.5+(2×1.5))	12.5
198482.1000	6FX5002-5DA11-1BA0*	10.0	(4×2.5+(2×1.5))	14.1
198502.1000	6FX5002-5DA21-1BA0*	10.0	(4×1.5+(2×1.5))	12.5
198532.1000	6FX5002-5DA31-1BA0*	10.0	(4×2.5+(2×1.5))	14.1
198562.1000	6FX5002-5DA41-1BA0*	10.0	(4×4+(2×1.5))	15.8
198572.1000	6FX5002-5DA51-1BA0*	10.0	(4×6+(2×1.5))	16.7
198582.1000	6FX5002-5DA61-1BA0*	10.0	(4×10+(2×1.5))	19.1
198472.1000	6FX5002-5DA02-1BA0*	10.0	(4×2.5+(2×1.5))	14.1
198492.1000	6FX5002-5DA12-1BA0*	10.0	(4×4+(2×1.5))	15.8
198512.1000	6FX5002-5DA22-1BA0*	10.0	(4×6+(2×1.5))	16.7
198542.1000	6FX5002-5DA32-1BA0*	10.0	(4×10+(2×1.5))	19.1
198077.1000	6FX5002-5DG01-1BA0*	10.0	(4×1.5+(2×1.5))	12.5
198087.1000	6FX5002-5DG11-1BA0*	10.0	(4×2.5+(2×1.5))	14.1
198082.1000	6FX5002-5DG21-1BA0*	10.0	(4×1.5+(2×1.5))	12.5
198092.1000	6FX5002-5DG31-1BA0*	10.0	(4×2.5+(2×1.5))	14.1
198097.1000	6FX5002-5DG41-1BA0*	10.0	(4×4+(2×1.5))	15.8
198102.1000	6FX5002-5DG51-1BA0*	10.0	(4×6+(2×1.5))	16.7
198117.1000	6FX5002-5DG61-1BA0*	10.0	(4×10+(2×1.5))	19.1

Design

- Jacket colour orange RAL 2003

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PVC servo cable assemblies with brake cores for hard wiring

Acc. to SIEMENS-6FX5002 standard Base cable



Application

- Base cable, for Siemens servo drives
- For flexible application without compulsory guide
- Cost-effective alternative to the cable carrier suitable 6FX8002 version

Properties

- PVC Flame-retardant, self-extinguishing
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

Voltage	
U_0/U	0.6/1.0 kV
Insulation resistance	min. 20 M Ω x km
Temperature range	
moving	-5 °C to +70 °C
fixed	-25 °C to +70 °C

Design

- Jacket colour orange RAL 2003

Part-No.	SIEMENS designation	Length m	Number of strands/cross- section	Outer- \varnothing approx. mm
Base cable				
198461.1000	6FX5002-5DA01-1BA0*	10.0	(4x1.5+(2x1.5))	12.5
198481.1000	6FX5002-5DA11-1BA0*	10.0	(4x2.5+(2x1.5))	14.1
198501.1000	6FX5002-5DA21-1BA0*	10.0	(4x1.5+(2x1.5))	12.5
198531.1000	6FX5002-5DA31-1BA0*	10.0	(4x2.5+(2x1.5))	14.1
198561.1000	6FX5002-5DA41-1BA0*	10.0	(4x4+(2x1.5))	15.8
198571.1000	6FX5002-5DA51-1BA0*	10.0	(4x6+(2x1.5))	16.7
198581.1000	6FX5002-5DA61-1BA0*	10.0	(4x10+(2x1.5))	19.1
198471.1000	6FX5002-5DA02-1BA0*	10.0	(4x2.5+(2x1.5))	14.1
198491.1000	6FX5002-5DA12-1BA0*	10.0	(4x4+(2x1.5))	15.8
198511.1000	6FX5002-5DA22-1BA0*	10.0	(4x6+(2x1.5))	16.7
198541.1000	6FX5002-5DA32-1BA0*	10.0	(4x10+(2x1.5))	19.1
198871.1000	6FX5002-5DA23-1BA0*	10.0	(4x16+(2x1.5))	21.0
198881.1000	6FX5002-5DA33-1BA0*	10.0	(4x25+(2x1.5))	28.5
198076.1000	6FX5002-5DG01-1BA0*	10.0	(4x1.5+(2x1.5))	12.5
198086.1000	6FX5002-5DG11-1BA0*	10.0	(4x2.5+(2x1.5))	14.1
198081.1000	6FX5002-5DG21-1BA0*	10.0	(4x1.5+(2x1.5))	12.5
198091.1000	6FX5002-5DG31-1BA0*	10.0	(4x2.5+(2x1.5))	14.1
198096.1000	6FX5002-5DG41-1BA0*	10.0	(4x4+(2x1.5))	15.8
198101.1000	6FX5002-5DG51-1BA0*	10.0	(4x6+(2x1.5))	16.7
198116.1000	6FX5002-5DG61-1BA0*	10.0	(4x10+(2x1.5))	19.1

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PUR servo cable assemblies with brake cores for cable carriers

Acc. to SIEMENS-6FX8002 standard Extension



Application

- Extension, for Siemens servo drives
- Through full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments, machines and plants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

UL approval	1000 V 80 °C
Voltage	
U_0/U	0.6/1.0 kV
Insulation resistance	min. 500 MΩ x km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D x 10
fixed	D x 6
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

Part-No.	SIEMENS designation	Length m	Number of strands/cross- section	Outer-∅ approx. mm
Extension				
198730.1000	6FX8002-5DA05-1BA0*	10.0	(4x1.5+(2x1.5))	10.5
198990.1000	6FX8002-5DA15-1BA0*	10.0	(4x2.5+(2x1.5))	12.1
198790.1000	6FX8002-5DA28-1BA0*	10.0	(4x1.5+(2x1.5))	10.5
198800.1000	6FX8002-5DA38-1BA0*	10.0	(4x2.5+(2x1.5))	12.1
198005.1000	6FX8002-5DA48-1BA0*	10.0	(4x4+(2x1.5))	13.6
198010.1000	6FX8002-5DA58-1BA0*	10.0	(4x6+(2x1.5))	15.5
198025.1000	6FX8002-5DA68-1BA0*	10.0	(4x10+(2x1.5))	18.3

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PUR servo cable assemblies with brake cores for hard wiring

Similar to SIEMENS-6FX5002 standard but with PUR jacket
Extension



Application

- Extension, for Siemens servo drives
- For flexible application without compulsory guide
- Cost-effective alternative to the cable carrier suitable 6FX8002 version

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

Voltage

U_0/U 0.6/1.0 kV

Insulation resistance

min. 100 M Ω × km

Temperature range

moving -25 °C to +80 °C

fixed -40 °C to +80 °C

Burning behaviour

Flame-retardant according to
VDE 0482 T 265-2-1;
DIN EN 50265-2-1;
IEC 60332-1

Design

- Jacket colour orange RAL 2003

Part-No.	SIEMENS designation	Length m	Number of strands/cross-section	Outer- \varnothing approx. mm
Extension				
198732.1000	6FX5002-5DA05-1BA0*	10.0	(4×1.5+(2×1.5))	12.5
198992.1000	6FX5002-5DA15-1BA0*	10.0	(4×2.5+(2×1.5))	14.1
198792.1000	6FX5002-5DA28-1BA0*	10.0	(4×1.5+(2×1.5))	12.5
198802.1000	6FX5002-5DA38-1BA0*	10.0	(4×2.5+(2×1.5))	14.1
198007.1000	6FX5002-5DA48-1BA0*	10.0	(4×4+(2×1.5))	15.8
198012.1000	6FX5002-5DA58-1BA0*	10.0	(4×6+(2×1.5))	16.7
198027.1000	6FX5002-5DA68-1BA0*	10.0	(4×10+(2×1.5))	19.1

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PVC servo cable assemblies with brake cores for hard wiring

Acc. to SIEMENS-6FX5002 standard Extension



Application

- Extension, for Siemens servo drives
- For flexible application without compulsory guide
- Cost-effective alternative to the cable carrier suitable 6FX8002 version

Properties

- PVC Flame-retardant, self-extinguishing
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

Voltage	
U ₀ /U	0.6/1.0 kV
Insulation resistance	min. 20 MΩ × km
Temperature range	
moving	-5 °C to +70 °C
fixed	-25 °C to +70 °C

Design

- Jacket colour orange RAL 2003

Part-No.	SIEMENS designation	Length m	Number of strands/cross-section	Outer-∅ approx. mm
Extension				
198731.1000	6FX5002-5DA05-1BA0*	10.0	(4×1.5+(2×1.5))	12.5
198991.1000	6FX5002-5DA15-1BA0*	10.0	(4×2.5+(2×1.5))	14.1
198791.1000	6FX5002-5DA28-1BA0*	10.0	(4×1.5+(2×1.5))	12.5
198801.1000	6FX5002-5DA38-1BA0*	10.0	(4×2.5+(2×1.5))	14.1
198006.1000	6FX5002-5DA48-1BA0*	10.0	(4×4+(2×1.5))	15.8
198011.1000	6FX5002-5DA58-1BA0*	10.0	(4×6+(2×1.5))	16.7
198026.1000	6FX5002-5DA68-1BA0*	10.0	(4×10+(2×1.5))	19.1

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PUR servo cable assemblies with brake cores for cable carriers

Acc. to SIEMENS-6FX2002 standard Base cable



Application

- Base cable, for Siemens servo drives
- Through full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments, machines and plants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

Voltage	
U ₀ /U	0.6/1.0 kV
Insulation resistance	min. 500 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 10
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour petrol RAL 5018

Part-No.	SIEMENS designation	Length m	Number of strands/cross-section	Outer-∅ approx. mm
Base cable				
198185.1000	6FX2002-5DA01-1BA0*	10.0	(4×1.5+(2×1.0))	10.0
198145.1000	6FX2002-5DA11-1BA0*	10.0	(4×2.5+(2×1.0))	11.4
198165.1000	6FX2002-5DA21-1BA0*	10.0	(4×1.5+(2×1.0))	10.0
198135.1000	6FX2002-5DA02-1BA0*	10.0	(4×2.5+(2×1.0))	11.4
198225.1000	6FX2002-5DA12-1BA0*	10.0	(4×4+(2×1.0))	12.9
198175.1000	6FX2002-5DA22-1BA0*	10.0	(4×6+(2×1.0))	16.5

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PUR servo cable assemblies without brake cores for c-tracks

Acc. to SIEMENS-6FX8002 standard Base cable



Application

- Base cable, for Siemens servo drives
- Through full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

UL approval	1000 V 80 °C
Voltage	
U_0/U	0.6/1.0 kV
Insulation resistance	min. 500 M Ω x km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D x 10
fixed	D x 6
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

Part-No.	SIEMENS designation	Length m	Number of strands/cross- section	Outer- \varnothing approx. mm
Base cable				
198360.1000	6FX8002-5CA01-1BA0*	10.0	(4x1.5)	8.0
198380.1000	6FX8002-5CA11-1BA0*	10.0	(4x2.5)	9.6
198400.1000	6FX8002-5CA21-1BA0*	10.0	(4x1.5)	8.0
198410.1000	6FX8002-5CA31-1BA0*	10.0	(4x2.5)	9.6
198430.1000	6FX8002-5CA41-1BA0*	10.0	(4x4)	11.1
198440.1000	6FX8002-5CA51-1BA0*	10.0	(4x6)	13.4
198450.1000	6FX8002-5CA61-1BA0*	10.0	(4x10)	16.7
198980.1000	6FX8002-5CS54-1BA0*	10.0	(4x6)	13.4
198370.1000	6FX8002-5CA02-1BA0*	10.0	(4x2.5)	9.6
198390.1000	6FX8002-5CA12-1BA0*	10.0	(4x4)	11.1
198420.1000	6FX8002-5CA32-1BA0*	10.0	(4x10)	16.7
198950.1000	6FX8002-5CG01-1BA0*	10.0	(4x1.5)	8.0
198040.1000	6FX8002-5CG11-1BA0*	10.0	(4x2.5)	9.6
198035.1000	6FX8002-5CG21-1BA0*	10.0	(4x1.5)	8.0
198045.1000	6FX8002-5CG31-1BA0*	10.0	(4x2.5)	9.6
198050.1000	6FX8002-5CG41-1BA0*	10.0	(4x4)	11.1
198055.1000	6FX8002-5CG51-1BA0*	10.0	(4x6)	13.4
198060.1000	6FX8002-5CG61-1BA0*	10.0	(4x10)	16.7

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PUR servo cable assemblies without brake cores for c-tracks

Acc. to SIEMENS-6FX8002 standard Base cable DRIVE-CLIQ®



Application

- Base cable DRIVE-CLIQ®, for Siemens servo drives
- Through full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

UL approval	1000 V 80 °C
Voltage	
U ₀ /U	0.6/1.0 kV
Insulation resistance	min. 500 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 10
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

Part-No.	SIEMENS designation	Length m	Number of strands/cross- section	Outer-∅ approx. mm
Base cable DRIVE-CLIQ®				
198300.1000	6FX8002-5CS01-1BA0*	10.0	(4×1.5)	8.0
198304.1000	6FX8002-5CS21-1BA0*	10.0	(4×1.5)	8.0
198301.1000	6FX8002-5CS02-1BA0*	10.0	(4×1.5)	8.0
198302.1000	6FX8002-5CS11-1BA0*	10.0	(4×2.5)	9.6
198305.1000	6FX8002-5CS31-1BA0*	10.0	(4×2.5)	9.6
198303.1000	6FX8002-5CS12-1BA0*	10.0	(4×2.5)	9.6
198317.1000	6FX8002-5CS41-1BA0*	10.0	(4×4)	11.1
198306.1000	6FX8002-5CS42-1BA0*	10.0	(4×4)	11.1
198318.1000	6FX8002-5CS51-1BA0*	10.0	(4×6)	13.4
198307.1000	6FX8002-5CS52-1BA0*	10.0	(4×6)	13.4
198319.1000	6FX8002-5CS61-1BA0*	10.0	(4×10)	16.7
198308.1000	6FX8002-5CS62-1BA0*	10.0	(4×10)	16.7

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PUR servo cable assemblies without brake cores for c-tracks

Acc. to SIEMENS-6FX8002 standard Extension



Application

- Extension, for Siemens servo drives
- Through full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

UL approval	1000 V 80 °C
Voltage	
U_0/U	0.6/1.0 kV
Insulation resistance	min. 500 M Ω x km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D x 10
fixed	D x 6
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

Part-No.	SIEMENS designation	Length m	Number of strands/cross- section	Outer- \varnothing approx. mm
Extension				
198820.1000	6FX8002-5CA05-1BA0*	10.0	(4x1.5)	8.0
198985.1000	6FX8002-5CA15-1BA0*	10.0	(4x2.5)	9.6
198765.1000	6FX8002-5CA28-1BA0*	10.0	(4x1.5)	8.0
198995.1000	6FX8002-5CA38-1BA0*	10.0	(4x2.5)	9.6
198015.1000	6FX8002-5CA48-1BA0*	10.0	(4x4)	11.1
198020.1000	6FX8002-5CA58-1BA0*	10.0	(4x6)	13.4
198030.1000	6FX8002-5CA68-1BA0*	10.0	(4x10)	16.7

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PUR resolver cables for cable carriers

Acc. to SIEMENS-6FX8002 standard Base cable



Application

- Resolver cable
- Through full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

UL approval	30 V 80 °C / 300 V 80 °C
Rated voltage	300 V
Insulation resistance	min. 200 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour green RAL 6018

Part-No.	SIEMENS designation	Length m	Outer-∅ approx. mm
Base cable			
198110.1000	6FX8002-2AD00-1BA0*	10.0	8.6
198830.1000	6FX8002-2AH00-1BA0*	10.0	9.0
198120.1000	6FX8002-2CA11-1BA0*	10.0	9.0
198130.1000	6FX8002-2CA15-1BA0*	10.0	8.6
198628.1000	6FX8002-2CA31-1BA0*	10.0	9.5
198850.1000	6FX8002-2CA51-1BA0*	10.0	8.6
198150.1000	6FX8002-2CA61-1BA0*	10.0	8.6
198290.1000	6FX8002-2CA72-1BA0*	10.0	9.0
198191.1000	6FX8002-2CB31-1BA0*	10.0	6.7
198200.1000	6FX8002-2CB51-1BA0*	10.0	9.0
198210.1000	6FX8002-2CC11-1BA0*	10.0	9.0
198220.1000	6FX8002-2CD01-1BA0*	10.0	9.0
198240.1000	6FX8002-2CF02-1BA0*	10.0	8.6
198170.1000	6FX8002-2CG00-1BA0*	10.0	9.0
198250.1000	6FX8002-2CH00-1BA0*	10.0	8.6
198280.1000	6FX8002-2EQ10-1BA0*	10.0	9.5
198140.1000	6FX8002-2CA21-1BA0*	10.0	8.6
198230.1000	6FX8002-2CM00-1BA0*	10.0	8.6
198260.1000	6FX8002-2CE07-1BA0*	10.0	9.0
198270.1000	6FX8002-2EQ00-1BA0*	10.0	9.5

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PUR resolver cables for hard wiring

Similar to SIEMENS-6FX5002 standard, but with PUR jacket
Base cable



Application

- Resolver cable
- For flexible application without compulsory guide
- Cost-effective alternative to the cable carrier suitable 6FX8002 version

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

Rated voltage	300 V
Insulation resistance	min. 200 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1

Design

- Jacket colour green RAL 6018

Part-No.	SIEMENS designation	Length m	Outer-∅ approx. mm
Base cable			
198111.1000	6FX5002-2AD00-1BA0*	10.0	8.8
198831.1000	6FX5002-2AH00-1BA0*	10.0	9.0
198121.1000	6FX5002-2CA11-1BA0*	10.0	9.0
198131.1000	6FX5002-2CA15-1BA0*	10.0	8.8
198629.1000	6FX5002-2CA31-1BA0*	10.0	10.5
198851.1000	6FX5002-2CA51-1BA0*	10.0	8.8
198151.1000	6FX5002-2CA61-1BA0*	10.0	8.8
198291.1000	6FX5002-2CA72-1BA0*	10.0	9.0
198192.1000	6FX5002-2CB31-1BA0*	10.0	7.2
198201.1000	6FX5002-2CB51-1BA0*	10.0	9.0
198211.1000	6FX5002-2CC11-1BA0*	10.0	9.0
198221.1000	6FX5002-2CD01-1BA0*	10.0	9.0
198241.1000	6FX5002-2CF02-1BA0*	10.0	8.8
198171.1000	6FX5002-2CG00-1BA0*	10.0	9.0
198251.1000	6FX5002-2CH00-1BA0*	10.0	8.8
198281.1000	6FX5002-2EQ10-1BA0*	10.0	10.5
198141.1000	6FX5002-2CA21-1BA0*	10.0	8.8
198231.1000	6FX5002-2CM00-1BA0*	10.0	8.8
198261.1000	6FX5002-2CE07-1BA0	10.0	9.0
198271.1000	6FX5002-2EQ00-1BA0*	10.0	10.5
198161.1000	6FX5002-2CA34-1BA0	10.0	10.5

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PUR resolver cables for cable carriers

Acc. to SIEMENS-6FX8002 standard Extension



Application

- Resolver cable
- Through full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

UL approval	30 V 80 °C / 300 V 80 °C
Rated voltage	300 V
Insulation resistance	min. 200 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour green RAL 6018

Part-No.	SIEMENS designation	Length m	Outer-Ø approx. mm
Extension			
198160.1000	6FX8002-2CA34-1BA0*	10.0	9.5
198740.1000	6FX8002-2CF04-1BA0*	10.0	8.6
198700.1000	6FX8002-2EQ14-1BA0*	10.0	9.5
198105.1000	6FX8002-2AD04-1BA0*	10.0	8.6
198295.1000	6FX8002-2CB54-1BA0*	10.0	9.0

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PUR resolver cables for hard wiring

Similar to SIEMENS-6FX5002
standard but with PUR jacket
Extension



Application

- Resolver cable
- For flexible application without compulsory guide
- Cost-effective alternative to the cable carrier suitable 6FX8002 version

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

Rated voltage	300 V
Insulation resistance	min. 200 M Ω × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1

Design

- Jacket colour green RAL 6018

Part-No.	SIEMENS designation	Length m	Outer- \varnothing approx. mm
Extension			
198741.1000	6FX5002-2CF04-1BA0*	10.0	8.8
198701.1000	6FX5002-2EQ14-1BA0*	10.0	10.5

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PUR resolver cables for cable carriers

Acc. to SIEMENS-6FX8002 standard Base cable DRIVE-CLIQ®



Application

- Resolver cable
- Through full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

UL approval	30 V 80 °C / 300 V 80 °C
Rated voltage	300 V
Insulation resistance	min. 200 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour green RAL 6018

Part-No.	SIEMENS designation	Length m	Outer-∅ approx. mm
Base cable DRIVE-CLIQ®			
198890.1000	6FX8002-2DC00-1BA0*	10.0	7.0
198900.1000	6FX8002-2DC10-1BA0*	10.0	7.0
198910.1000	6FX8002-2DC20-1BA0*	10.0	7.0

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PUR resolver cables for hard wiring

Similar to SIEMENS-6FX5002 standard, but with PUR jacket
Base DRIVE-CLIQ®



Application

- Resolver cable
- For flexible application without compulsory guide
- Cost-effective alternative to the cable carrier suitable 6FX8002 version

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

Rated voltage	300 V
Insulation resistance	min. 200 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1

Design

- Jacket colour green RAL 6018

Part-No.	SIEMENS designation	Length m	Outer-∅ approx. mm
Base cable DRIVE-CLIQ®			
198891.1000	6FX5002-2DC00-1BA0*	10.0	6.9
198901.1000	6FX5002-2DC10-1BA0*	10.0	6.9
198911.1000	6FX5002-2DC20-1BA0*	10.0	6.9

* Siemens article designations are registered trademarks of Siemens AG, and are for reference purposes only

PUR servomotor cables for C-tracks

According to INDRAMAT standard



Application

- Motor cable for INDRAMAT SERVO drives
- Thanks to full PUR jacket and TPE core insulation, these cables are ideally suitable for use with drag chains in the harshest operating environments and with aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Special features:

- No minimum order quantity
- All intermediate lengths in steps of 0.5 m are available within a short time
- When ordering, please specify serial number and length key
- Additional types on request

Technical data

UL approval	1000 V 80 °C
Voltage	
U ₀ /U	0.6/1.0 kV
Insulation resistance	min. 500 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 10
fixed	D × 6
Burning behaviour	Flame retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

Part-No.	INDRAMAT designation	Length m	Number of strands/ cross-section	Outer-Ø approx. mm
193040.1000	IKG 0006/10.0*	10.0	(4G1.5+2×(2×0.75))	11.8
193071.1000	IKG 0050/10.0*	10.0	(4G2.5+2×(2×0.75))	13.5
193048.1000	IKG 0081/10.0*	10.0	(4G6.0+2×(2×1.5))	18.0
193067.1000	IKG 0143/10.0*	10.0	(4G16.0+2×(2×1.5))	23.0
193041.1000	IKG 0314/10.0*	10.0	(4G2.5+2×(2×0.75))	13.5
193072.1000	IKG 0331/10.0*	10.0	(4G0.75+2×(2×0.5))	9.4
193073.1000	IKG 0332/10.0*	10.0	(4G0.75+2×(2×0.5))	9.4
193043.1000	IKG 4009/10.0*	10.0	(4G1.5+2×(2×0.75))	11.8
193042.1000	IKG 4016/10.0*	10.0	(4G1.5+2×(2×0.75))	11.8
193020.1000	IKG 4017/10.0*	10.0	(4G1.5+2×(2×0.75))	11.8
193045.1000	IKG 4018/10.0*	10.0	(4G1.5+2×(2×0.75))	11.8
193046.1000	IKG 4020/10.0*	10.0	(4G1.5+2×(2×0.75))	11.8
193074.1000	IKG 4047/10.0*	10.0	(4G1.5+2×(2×0.75))	11.8
193080.1000	IKG 4050/10.0*	10.0	(4G1.5+2×(2×0.75))	11.8
193049.1000	IKG 4055/10.0*	10.0	(4G1.5+2×(2×0.75))	11.8
193068.1000	IKG 4060/10.0*	10.0	(4G1.5+2×(2×0.75))	11.8
193044.1000	IKG 4067/10.0*	10.0	(4G2.5+2×(2×0.75))	13.5
193050.1000	IKG 4070/10.0*	10.0	(4G2.5+2×(2×0.75))	13.5
193051.1000	IKG 4087/10.0*	10.0	(4G4.0+2×(2×1.5))	15.5
193052.1000	IKG 4090/10.0*	10.0	(4G4.0+2×(2×1.5))	15.5
193053.1000	IKG 4107/10.0*	10.0	(4G6.0+2×(2×1.5))	18.0
193054.1000	IKG 4117/10.0*	10.0	(4G4.0+2×(2×1.5))	15.5
193055.1000	IKG 4118/10.0*	10.0	(4G6.0+2×(2×0.75))	18.0
193056.1000	IKG 4119/10.0*	10.0	(4G1.0+2×(2×0.75))	11.1
193057.1000	IKG 4122/10.0*	10.0	(4G10.0+2×(2×1.5))	20.1
193058.1000	IKG 4127/10.0*	10.0	(4G10.0+2×(2×1.5))	20.1
193059.1000	IKG 4138/10.0*	10.0	(4G1.0+2×(2×0.75))	11.1
193060.1000	IKG 4139/10.0*	10.0	(4G2.5+2×(2×0.75))	13.5
193069.1000	IKG 4150/10.0*	10.0	(4G6.0+2×(2×1.5))	18.0
193061.1000	IKG 4172/10.0*	10.0	(4G16.0+2×(2×1.5))	23.0
193062.1000	IKG 4176/10.0*	10.0	(4G10.0+2×(2×1.5))	20.1
193063.1000	IKG 4186/10.0*	10.0	(4G16.0+2×(2×1.5))	23.0
193064.1000	IKG 4193/10.0*	10.0	(4G16.0+2×(2×1.5))	23.0
193065.1000	IKG 4204/10.0*	10.0	(4G25.0+2×(2×1.5))	28.7
193066.1000	IKG 4224/10.0*	10.0	(4G35.0+2×(2×1.5))	31.4

* INDRAMAT article descriptions are registered trademarks of Bosch Rexroth and serve as reference only

PUR servomotor cables for C-tracks

According to INDRAMAT standard



Application

- Motor cable for INDRAMAT SERVO drives
- Thanks to full PUR jacket and TPE core insulation, these cables are ideally suitable for use with drag chains in the harshest operating environments and with aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Special features:

- No minimum order quantity
- All intermediate lengths in steps of 0.5 m are available within a short time
- When ordering, please specify serial number and length key
- Additional types on request

Technical data

UL approval	1000 V 80 °C
Voltage	
U ₀ /U	0.6/1 kV
Insulation resistance	min. 500 MΩ x km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D x 10
fixed	D x 6
Burning behaviour	Flame retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

Part-No.	INDRAMAT designation	Length m	Number of strands/ cross-section	Outer-∅ approx. mm
193240.1000	RKL 4302/10.0*	10.0	(4G1.0+2x(2x0.75))	11.1
193258.1000	RKL 4303/10.0*	10.0	(4G1.0+2x(2x0.75))	11.1
193241.1000	RKL 4306/10.0*	10.0	(4G1.5+2x(2x0.75))	11.8
193242.1000	RKL 4308/10.0*	10.0	(4G2.5+2x(2x0.75))	13.5
193243.1000	RKL 4309/10.0*	10.0	(4G2.5+2x(2x0.75))	13.5
193244.1000	RKL 4310/10.0*	10.0	(4G2.5+2x(2x0.75))	13.5
193263.1000	RKL 4311/10.0*	10.0	(4G1.5+2x(2x0.75))	11.8
193245.1000	RKL 4312/10.0*	10.0	(4G2.5+2x(2x0.75))	13.5
193257.1000	RKL 4314/10.0*	10.0	(4G4.0+2x(2x1.5))	15.5
193246.1000	RKL 4317/10.0*	10.0	(4G6.0+2x(2x1.5))	18.0
193247.1000	RKL 4318/10.0*	10.0	(4G6.0+2x(2x1.5))	18.0
193259.1000	RKL 4320/10.0*	10.0	(4G1.5+2x(2x0.75))	11.8
193252.1000	RKL 4321/10.0*	10.0	(4G2.5+2x(2x0.75))	13.5
193248.1000	RKL 4323/10.0*	10.0	(4G6.0+2x(2x1.5))	18.0
193249.1000	RKL 4324/10.0*	10.0	(4G10.0+2x(2x1.5))	20.1
193250.1000	RKL 4328/10.0*	10.0	(4G6.0+2x(2x1.5))	18.0
193251.1000	RKL 4329/10.0*	10.0	(4G10.0+2x(2x1.5))	20.1
193253.1000	RKL 4330/10.0*	10.0	(4G16.0+2x(2x1.5))	23.0
193254.1000	RKL 4331/10.0*	10.0	(4G25.0+2x(2x1.5))	28.7
193255.1000	RKL 4337/10.0*	10.0	(4G4.0+2x(2x1.5))	15.5
193256.1000	RKL 4338/10.0*	10.0	(4G6.0+2x(2x1.5))	18.0
193270.1000	RKL 4339/10.0*	10.0	(4G10.0+2x(2x1.5))	20.1
193271.1000	RKL 4340/10.0*	10.0	(4G16.0+2x(2x1.5))	23.0
193264.1000	RKL 4341/10.0*	10.0	(4G25.0+2x(2x1.5))	28.7
193260.1000	RKL 4343/10.0*	10.0	(4G2.5+2x(2x0.75))	13.5
193265.1000	RKL 4518/10.0*	10.0	(4G25.0+2x(2x1.5))	28.7
193266.1000	RKL 4519/10.0*	10.0	(4G35.0+2x(2x1.5))	31.4
193267.1000	RKL 4603/10.0*	10.0	(4G2.5+2x(2x0.75))	13.5
193268.1000	RKL 4606/10.0*	10.0	(4G6.0+2x(2x1.5))	18.0
193269.1000	RKL 4612/10.0*	10.0	(4G25.0+2x(2x1.5))	28.7
193261.1000	RKL 0013/10.0*	10.0	(4G0.75+2x(2x0.5))	9.4
193262.1000	RKL 0014/10.0*	10.0	(4G1.0+2x(2x0.75))	11.1

* INDRAMAT article descriptions are registered trademarks of Bosch Rexroth and serve as reference only

PUR feedback cables for C-tracks

According to INDRAMAT standard



Application

- Feedback cables
- Thanks to full PUR jacket and TPE core insulation, these cables are ideally suitable for use with drag chains in the harshest operating environments and with aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Special features:

- No minimum order quantity
- All intermediate lengths in steps of 0.5 m are available within a short time
- When ordering, please specify serial number and length key
- Additional types on request

Technical data

UL approval	30 V 80 °C / 300 V 80 °C
Rated voltage	300 V
Insulation resistance	min. 200 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 6
Burning behaviour	Flame retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

Part-No.	INDRAMAT designation	Length m	Outer-∅ approx. mm
193164.1000	IKS 0230/10.0*	10.0	7.6
193165.1000	IKS 0232/10.0*	10.0	7.6
193620.1000	IKS 0253/10.0*	10.0	8.8
193154.1000	IKS 0257/10.0*	10.0	8.8
193145.1000	IKS 4001/10.0*	10.0	9.4
193146.1000	IKS 4038/10.0*	10.0	9.4
193147.1000	IKS 4042/10.0*	10.0	8.3
193148.1000	IKS 4043/10.0*	10.0	8.3
193149.1000	IKS 4103/10.0*	10.0	8.3
193150.1000	IKS 4151/10.0*	10.0	8.3
193151.1000	IKS 4153/10.0*	10.0	8.3
193152.1000	IKS 4374/10.0*	10.0	8.3
193153.1000	IKS 4389/10.0*	10.0	8.1
193140.1000	IKS 0251/10.0*	10.0	8.8
193142.1000	IKS 0301/10.0*	10.0	8.2
193143.1000	IKS 0321/10.0*	10.0	8.2
193144.1000	IKS 0374/10.0*	10.0	8.2
193141.1000	IKS 0252/10.0*	10.0	8.8
193000.1000	RKG 0002/10.0*	10.0	8.1
193034.1000	RKG 4200/10.0*	10.0	8.3
193001.1000	RKG 4201/10.0*	10.0	8.3
193047.1000	RKG 0033/10.0*	10.0	8.3

* INDRAMAT article descriptions are registered trademarks of Bosch Rexroth and serve as reference only

Servo assemblies

According to LENZE-Standard



Application

- Servo cables for LENZE SERVO drives
- Especially for industrial environments, machines and plants

For fixed wiring

- PVC outer jacket, PVC conductor insulation, flame-retardant, suitable for fixed wiring

For use as C-track chains

- Through full PUR jacket and TPE conductor insulation optimally suited for cable carriers, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Special features:

- No minimum order quantity
- All intermediate lengths in steps of 0.5 m are available within a short time
- When ordering, please specify serial number and length key
- Additional types on request

Technical data

UL approval	1000 V 80 °C
Voltage	
U ₀ /U	0.6/1 kV
Insulation resistance	min. 500 MΩ x km
Temperature range	
For fixed wiring	
fixed	-25 °C to +70 °C
For use as C-track chains	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D x 10
fixed	D x 6
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

Part-No.	LENZE description	Length m	Number of strands/cross-section	Outer-∅ approx. mm
For fixed wiring				
193900.1000	EWLM-010GM-015*	10.0	(4G1.5+(2x1.5))	12.7
193901.1000	EWLM-010GM-025*	10.0	(4G2.5+(2x1.5))	13.8
193902.1000	EWLM-010GM-040*	10.0	(4G4.0+(2x1.5))	15.5
193903.1000	EYP-0003-A-0100-M01-A00*	10.0	(4G1.5)	9.5
For use as C-track chains				
193904.1000	EWLM-010GMS-015*	10.0	(4G1.5+(2x1.5))	12.9
193905.1000	EWLM-010GMS-025*	10.0	(4G2.5+(2x1.5))	13.8
193906.1000	EWLM-010GMS-040*	10.0	(4G4.0+(2x1.5))	14.9

* LENZE article designations are registered trademarks of LENZE AG, and are for reference purposes only

Resolver cables

According to LENZE-Standard



Application

- LENZE resolver cables

For fixed wiring

- PVC outer jacket, PVC conductor insulation, flame-retardant, suitable for fixed wiring

For use as C-track chains

- Through full PUR jacket and TPE conductor insulation optimally suited for cable carriers, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Special features:

- No minimum order quantity
- All intermediate lengths in steps of 0.5 m are available within a short time
- When ordering, please specify serial number and length key
- Additional types on request

Technical data

UL approval	30 V 80 °C / 300 V 80 °C
Rated voltage	300 V
Insulation resistance	min. 200 MΩ × km
Temperature range	
For fixed wiring	
fixed	-25 °C to +70 °C
For use as C-track chains	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 7.5
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour green RAL 6018

Part-No.	LENZE description	Length m	Outer-∅ approx. mm
For fixed wiring			
193910.1000	EWLR-010GM-T*	10.0	9.5
For use as C-track chains			
193911.1000	EWLR-010GMS-T*	10.0	9.0
193912.1000	EWLR-010ZMS-T*	10.0	9.0
193913.1000	EYF-0020-A-0100-F01-S04*	10.0	9.5

* LENZE article designations are registered trademarks of LENZE AG, and are for reference purposes only

Encoder cables

According to LENZE-Standard



Application

- LENZE encoder cables

For fixed wiring

- PVC outer jacket, PVC conductor insulation, flame-retardant, suitable for fixed wiring

For use as C-track chains

- Through full PUR jacket and TPE conductor insulation optimally suited for cable carriers, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Special features:

- No minimum order quantity
- All intermediate lengths in steps of 0.5 m are available within a short time
- When ordering, please specify serial number and length key
- Additional types on request

Technical data

UL approval	30 V 80 °C / 300 V 80 °C
Rated voltage	300 V
Insulation resistance	min. 200 MΩ × km
Temperature range	
For fixed wiring	
fixed	-25 °C to +70 °C
For use as C-track chains	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 7.5
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour green RAL 6018

Part-No.	LENZE description	Length m	Outer-Ø approx. mm
For fixed wiring			
193920.1000	EWLE-010GM-T*	10.0	9.0
For use as C-track chains			
193921.1000	EWLE-010GMS-T*	10.0	9.0

* LENZE article designations are registered trademarks of LENZE AG, and are for reference purposes only

Fan cables

According to LENZE-Standard



Application

- LENZE fan cables

For fixed wiring

- PVC outer jacket, PVC conductor insulation, flame-retardant, suitable for fixed wiring

For use as C-track chains

- Through full PUR jacket and TPE conductor insulation optimally suited for cable carriers, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Special features:

- No minimum order quantity
- All intermediate lengths in steps of 0.5 m are available within a short time
- When ordering, please specify serial number and length key
- Additional types on request

Technical data

UL approval	30 V 80 °C / 300 V 80 °C
Rated voltage	300 V
Insulation resistance	min. 200 MΩ × km
Temperature range	
For fixed wiring	
fixed	-25 °C to +70 °C
For use as C-track chains	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 7.5
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour grey RAL 7001

Part-No.	LENZE description	Length m	Outer-∅ approx. mm
For fixed wiring			
193930.1000	EWLL-010GM*	10.0	6.0
For use as C-track chains			
193931.1000	EWLL-010GMS*	10.0	9.0
193932.1000	EWLL-010ZMS*	10.0	9.0
193933.1000	EYL-0001-V-0100-L02-J02*	10.0	9.5

* LENZE article designations are registered trademarks of LENZE AG, and are for reference purposes only

Servomotor cables

According to SEW standard



Application

- Servo cables for SEW drives
- Especially for industrial environments, machines and plants

For fixed wiring

- PVC outer jacket, PVC conductor insulation, flame-retardant, suitable for fixed wiring

For use as C-track chains

- Through full PUR jacket and TPE conductor insulation optimally suited for C-tracks, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Part-No.	SEW description	Length m	Number of strands/cross-section	Outer- \varnothing approx. mm
For fixed wiring				
193700.1000	0590 4544*	10.0	(4G1.5)	10.1
193741.1000	1335 4345*	10.0	(4G1.5+(3x1.0))	12.3
193712.1000	1332 4853*	10.0	(4G1.5+(3x1.0))	12.3
For use as C-track chains				
193702.1000	0590 6245*	10.0	(4G1.5)	10.1
193744.1000	1335 4388*	10.0	(4G1.5+(3x1.0))	12.3
193713.1000	1332 4861*	10.0	(4G1.5+(3x1.0))	12.3
193745.1000	1335 4396*	10.0	(4G2.5+(3x1.0))	13.8
193746.1000	1342 1603*	10.0	(4G4.0+(3x1.0))	15.3
193736.1000	1335 0234*	10.0	(4G6.0+(3x1.5))	17.5
193737.1000	1335 0242*	10.0	(4G10.0+(3x1.5))	20.0

Technical data

UL approval	1000 V 80 °C
Voltage	
U ₀ /U	0.6/1 kV
Insulation resistance	min. 500 M Ω x km
Temperature range	
For fixed wiring	
fixed	-25 °C to +70 °C
For use as C-track chains	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D x 10
fixed	D x 7.5
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; IEC 60332-1; UL 1581 section 1080 VW-1; CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

* SEW article designations are registered trademarks of SEW-Eurodrive GmbH & Co KG, and are for reference purposes only

Servo extensions

According to SEW standard



Application

- Servo extensions for SEW drives
- Especially for industrial environments, machines and plants

For fixed wiring

- PVC outer jacket, PVC conductor insulation, flame-retardant, suitable for fixed wiring

For use as C-track chains

- Through full PUR jacket and TPE conductor insulation optimally suited for cable carriers, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

UL approval	1000 V 80 °C
Voltage	
U_0/U	0.6/1 kV
Insulation resistance	min. 500 MΩ × km
Temperature range	
For fixed wiring	
fixed	-25 °C to +70 °C
For use as C-track chains	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 10
fixed	D × 7.5
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

Part-No.	SEW description	Length m	Number of strands/cross-section	Outer-∅ approx. mm
For use as C-track chains				
193728.1000	1333 2457*	10.0	(4G1.5)	10.1
193729.1000	1333 2465*	10.0	(4G2.5)	11.6
193730.1000	1333 2473*	10.0	(4G4.0)	13.2
193738.1000	1335 4221*	10.0	(4G1.5+(3×1.0))	12.3
193739.1000	1335 4248*	10.0	(4G2.5+(3×1.0))	13.8
193740.1000	1335 4337*	10.0	(4G4.0+(3×1.0))	15.3

* SEW article designations are registered trademarks of SEW-Eurodrive GmbH & Co KG, and are for reference purposes only

Motor cables

According to SEW standard



Application

- Motor cables for SEW drives
- Especially for industrial environments, machines and plants

For fixed wiring

- PVC outer jacket, PVC conductor insulation, flame-retardant, suitable for fixed wiring

For use as C-track chains

- Through full PUR jacket and TPE conductor insulation optimally suited for cable carriers, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

UL approval	1000 V 80 °C
Voltage	
U ₀ /U	0.6/1 kV
Insulation resistance	min. 500 MΩ x km
Temperature range	
For fixed wiring	
fixed	-25 °C to +70 °C
For use as C-track chains	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D x 10
fixed	D x 7.5
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

Part-No.	SEW description	Length m	Number of strands/cross-section	Outer-∅ approx. mm
For fixed wiring				
193764.1000	199 179 5*	10.0	(4G1.5)	10.1
193766.1000	199 181 7*	10.0	(4G2.5)	11.6
193768.1000	199 183 3*	10.0	(4G4.0)	13.2
193770.1000	199 185 X*	10.0	(4G6.0)	15.3
193772.1000	199 187 6*	10.0	(4G10.0)	17.8
For use as C-track chains				
193765.1000	199 180 9*	10.0	(4G1.5)	10.1
193767.1000	199 182 5*	10.0	(4G2.5)	11.6
193769.1000	199 184 1*	10.0	(4G4.0)	13.2
193771.1000	199 186 8*	10.0	(4G6.0)	15.3
193773.1000	199 188 4*	10.0	(4G10.0)	17.8

* SEW article designations are registered trademarks of SEW-Eurodrive GmbH & Co KG, and are for reference purposes only

Brake motor cables

According to SEW standard



Application

- Brake motor cables for SEW drives
- Especially for industrial environments, machines and plants

For fixed wiring

- PVC outer jacket, PVC conductor insulation, flame-retardant, suitable for fixed wiring

For use as C-track chains

- Through full PUR jacket and TPE conductor insulation optimally suited for cable carriers, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

UL approval	1000 V 80 °C
Voltage	
U_0/U	0.6/1 kV
Insulation resistance	min. 500 MΩ × km
Temperature range	
For fixed wiring	
fixed	-25 °C to +70 °C
For use as C-track chains	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 10
fixed	D × 7.5
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

Part-No.	SEW description	Length m	Number of strands/cross-section	Outer-∅ approx. mm
For fixed wiring				
193774.1000	199 189 2*	10.0	(4G1.5+(3×1.0))	12.3
193776.1000	199 191 4*	10.0	(4G2.5+(3×1.0))	13.8
193778.1000	199 193 0*	10.0	(4G4.0+(3×1.0))	15.3
193780.1000	199 195 7*	10.0	(4G6.0+(3×1.5))	17.5
193782.1000	199 197 3*	10.0	(4G10.0+(3×1.5))	20.0
For use as C-track chains				
193775.1000	199 190 6*	10.0	(4G1.5+(3×1.0))	12.3
193777.1000	199 192 2*	10.0	(4G2.5+(3×1.0))	13.8
193779.1000	199 194 9*	10.0	(4G4.0+(3×1.0))	15.3
193781.1000	199 196 5*	10.0	(4G6.0+(3×1.5))	17.5
193783.1000	199 198 1*	10.0	(4G10.0+(3×1.5))	20.0

* SEW article designations are registered trademarks of SEW-Eurodrive GmbH & Co KG, and are for reference purposes only

Brake motor extensions

According to SEW standard



Application

- Brake motor extension for SEW drives
- Especially for industrial environments, machines and plants

For fixed wiring

- PVC outer jacket, PVC conductor insulation, flame-retardant, suitable for fixed wiring

For use as C-track chains

- Through full PUR jacket and TPE conductor insulation optimally suited for cable carriers, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

UL approval	1000 V 80 °C
Voltage	
U_0/U	0.6/1 kV
Insulation resistance	min. 500 M Ω x km
Temperature range	
For fixed wiring	
fixed	-25 °C to +70 °C
For use as C-track chains	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D x 10
fixed	D x 7.5
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

Part-No.	SEW description	Length m	Number of strands/cross-section	Outer- \varnothing approx. mm
For fixed wiring				
193784.1000	199 199 X*	10.0	(4G1.5+(3x1.0))	12.3
193786.1000	199 201 5*	10.0	(4G2.5+(3x1.0))	13.8
193788.1000	199 203 1*	10.0	(4G4.0+(3x1.0))	15.3
193790.1000	199 205 8*	10.0	(4G6.0+(3x1.5))	17.5
193792.1000	199 207 4*	10.0	(4G10.0+(3x1.5))	20.0
For use as C-track chains				
193785.1000	199 200 7*	10.0	(4G1.5+(3x1.0))	12.3
193787.1000	199 202 3*	10.0	(4G2.5+(3x1.0))	13.8
193789.1000	199 204 X*	10.0	(4G4.0+(3x1.0))	15.3
193791.1000	199 206 6*	10.0	(4G6.0+(3x1.5))	17.5
193793.1000	199 208 2*	10.0	(4G10.0+(3x1.5))	20.0

* SEW article designations are registered trademarks of SEW-Eurodrive GmbH & Co KG, and are for reference purposes only

Motor extensions

According to SEW standard



Application

- Motor extension for SEW drives
- Especially for industrial environments, machines and plants

For fixed wiring

- PVC outer jacket, PVC conductor insulation, flame-retardant, suitable for fixed wiring

For use as C-track chains

- Through full PUR jacket and TPE conductor insulation optimally suited for cable carriers, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Technical data

UL approval	1000 V 80 °C
Voltage	
U ₀ /U	0.6/1 kV
Insulation resistance	min. 500 MΩ × km
Temperature range	
For fixed wiring	
fixed	-25 °C to +70 °C
For use as C-track chains	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 10
fixed	D × 7.5
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour orange RAL 2003

Part-No.	SEW description	Length m	Number of strands/cross-section	Outer-∅ approx. mm
For fixed wiring				
193805.1000	199 551 0*	10.0	(4G2.5)	11.6
193807.1000	199 553 7*	10.0	(4G4.0)	13.2
193809.1000	199 555 3*	10.0	(4G6.0)	15.3
193813.1000	199 557 X*	10.0	(4G10.0)	17.8
For use as C-track chains				
193804.1000	199 550 2*	10.0	(4G1.5)	10.1
193806.1000	199 552 9*	10.0	(4G2.5)	11.6
193808.1000	199 554 5*	10.0	(4G4.0)	13.2
193811.1000	199 556 1*	10.0	(4G6.0)	15.3
193814.1000	199 558 8*	10.0	(4G10.0)	17.8

* SEW article designations are registered trademarks of SEW-Eurodrive GmbH & Co KG, and are for reference purposes only

Resolver and encoder cables

According to SEW standard



Application

- SEW resolver and encoder cables
- Especially for industrial environments, machines and plants

For fixed wiring

- PVC outer jacket, PVC conductor insulation, flame-retardant, suitable for fixed wiring

For use as C-track chains

- Through full PUR jacket and TPE conductor insulation optimally suited for cable carriers, extremely harsh operating conditions, aggressive coolants and lubricants

Properties

- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Part-No.	SEW description	Length m	Outer-Ø approx. mm
For fixed wiring			
193714.1000	1332 7429*	10.0	8.8
193706.1000	1332 4535*	10.0	9.4
193709.1000	1332 4578*	10.0	9.4
193711.1000	1332 4594*	10.0	8.8
193715.1000	1332 7658*	10.0	9.4
193718.1000	1332 8131*	10.0	8.8
For use as C-track chains			
193708.1000	1332 4551*	10.0	9.4
193707.1000	1332 4543*	10.0	9.4
193710.1000	1332 4586*	10.0	8.8
193716.1000	1332 7666*	10.0	9.4
193717.1000	1332 8123*	10.0	9.4
193794.1000	199 319 4*	10.0	8.8

Technical data

UL approval	30 V 80 °C / 300 V 80 °C
Rated voltage	300 V
Insulation resistance	min. 200 MΩ × km
Temperature range	
For fixed wiring	
fixed	-25 °C to +70 °C
For use as C-track chains	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 7.5
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1 UL 1581 section 1080 VW-1 CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Jacket colour green RAL 6018

* SEW article designations are registered trademarks of SEW-Eurodrive GmbH & Co KG, and are for reference purposes only

Pre-fabricated front-end plug S7

S7 Plug For Siemens Simatic PLC/S7



Application

- Wiring from Siemens Simatic PLC/S7

Properties

- Stranded cable with S7 male
- Completely wired, 2. cables run at 90° to connector

Special features:

- Other strand colours or strand lengths as well as special contact assignment are available upon request

Technical data

Conductor labelling	white number imprint, corresponding to the terminal location on the plug
Cross section	0.5 mm ² ; 0.75 mm ² ; 1.00 mm ²
Packaging	3 m or 5 m Other lengths are available upon request

Design

- Fully compatible to Siemens
- Colour of strands dark blue RAL5010
Other strand colours are deliverable upon request

Part-No.	Type	Stranded cable	Cable construction	Length m
S7 Plug with screw termination				
197455	392 1AJ	20-pole	20×0.5	3.0
197456	392 1AJ	20-pole	20×0.5	5.0
197457	392 1AJ	20-pole	20×0.75	3.0
197458	392 1AJ	20-pole	20×0.75	5.0
197459	392 1AJ	20-pole	20×1.0	3.0
197460	392 1AJ	20-pole	20×1.0	5.0
197473	492 1AL	48-pole	48×0.5	3.0
197474	492 1AL	48-pole	48×0.5	5.0
197475	492 1AL	48-pole	48×0.75	3.0
197476	492 1AL	48-pole	48×0.75	5.0
197477	492 1AL	48-pole	48×1.0	3.0
197478	492 1AL	48-pole	48×1.0	5.0
S7 Plug with Easy-Connect				
197500	Compatible to 392 1AM	40-pole	40×0.5	3.0
197501	Compatible to 392 1AM	40-pole	40×0.5	5.0
197502	Compatible to 392 1AM	40-pole	40×0.75	3.0
197503	Compatible to 392 1AM	40-pole	40×0.75	5.0
197504	Compatible to 392 1AM	40-pole	40×1.0	3.0
197505	Compatible to 392 1AM	40-pole	40×1.0	5.0

Patch cable, shielded

Patch cable Cat 5E / Cat 6



Application

- Ethernet network wiring

Properties

- Straight connector
- Assignment according to EIA/TIA 568B
- Moulded sleeve with length imprint (not for cable carrier suitable and industrial design)
- Various colours available (not for cable carrier suitable and industrial design)

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Special features:

- No minimum order quantity
- All intermediate lengths in steps of 0.5 m are available within a short time
- When ordering, please specify serial number and length key
- Additional types on request

Technical data

Connector	Shielded RJ45, 3µ–50µ AU
Wiring	according to EIA/TIA 568B 1:1 or crossover

Design

- Fully plug compatible to IEC 60603-7

• Cable

Cat.5E:
(4x2xAWG26) SFTP

Cat.5E cable carrier suitable:

PUR bright yellow (4x2xAWG26/19) SUTP

Oil-resistant according to EN60811-2-1

Alternating bending test (with load) according to VDE0472 T603

Cat.6:

(4x2xAWG27) SSTP

Cat.6 industrial version:

PUR red (4x2xAWG27/7) SSTP

Resistant to mineral oil, ASTM oil and UV radiation, highly abrasion-resistant

Suitable for outdoor areas, but not for laying directly in earth

Halogen free

• Colour 1:1 wiring

Cable and sleeves in the same colour

The following colours are available: grey, green, blue, yellow, red,

black

Colour of crossover wiring

Cable grey, sleeves red

Colour of c-track suitable PUR

Cable and sleeves rape yellow

Part-No.	Colour	Wiring	Length m
Cat.5E			
192000.0100	grey	1:1	1.0
192022.0100	blue	1:1	1.0
192030.0100	green	1:1	1.0
192031.0100	yellow	1:1	1.0
192032.0100	red	1:1	1.0
192010.0100	grey/UL	1:1	1.0
192033.0100	black	1:1	1.0
Cat.5E			
192050.0100	grey	Crossover	1.0
192060.0100	green	Crossover	1.0
Cat.5E C-track compatible PUR			
192300.0100	Rape yellow	1:1	1.0
Cat.6			
192100.0100	grey	1:1	1.0
192112.0100	yellow	1:1	1.0
192130.0100	green	1:1	1.0
Cat.6			
192150.0100	grey	Crossover	1.0
Cat.6 industrial version PUR			
192201.0100	red	1:1	1.0

USB 3.0 (Super-Speed USB)

USB 3.0



Application

- Connection technology for serial bus system

Properties

- With the new standard USB 3.0, also called Super-Speed USB, transmission rates of up to 5Gbit/s are possible. This is equivalent to ten times the USB 2.0 standard.
- USB 3.0 remains downward compatible with the existing USB 2.0 devices.

Ordering instructions:

The Lütze Art. no. consists of two blocks that are separated by a dot:

6 digits before the dot: technical design

4 digits after the dot: length code in cm

Ex.: 198360.0500 corresponds to a length of 5.0 m

Special features:

- no minimum order amount
- When ordering, please specify serial number and length key
- Other types and lengths available on request

Technical data

Operating voltage	30 V
Temperature range	to + 80 °C
Outer Ø	5,5 ± 0,2 mm

Design

- Jacket colour black, blue
cables and sleeves in the same colour
RoHS compliant

Part-No.	Description	Length m	Colour
192700.0100	USB 3.0 cable A/A	1.0	blue
192710.0100	USB 3.0 cable A/B	1.0	blue
192720.0100	USB 3.0 cable B/B	1.0	blue
192730.0100	USB 3.0 Micro B/A male	1.0	black
192740.0100	USB 3.0 cable A/A female	1.0	blue

PUR Coil cables unshielded

LÜTZE PURFLEX



Application

- Machine and device construction, transport and conveyor technology
- Especially for industrial environments, machines and plants
- Lifting platforms, test benches and measuring systems as well as door drives

Properties

- Very good restoring force
- Low adhesion, abrasion-proof, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good industrial- and salt water resistance
- Widely resistant to oils, greases, alcohol-free benzines and kerosene
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
Test voltage	3000 V
Insulation resistance	min. 20 MΩ × km
Temperature range	
moving	-20 °C to +80 °C
unmoving	-40 °C to +80 °C

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special PVC conductor insulation
- Conductors coloured according to DIN VDE 0293-308 (new)
- 2-wire: brown, blue
- 3-wire: greenyellow, brown, blue
- 4-wire: greenyellow, brown, black, grey
- 5-wire: greenyellow, blue, brown, black, grey
- starting with 6 conductors black with white number print according to DIN EN 50334
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
- Polyurethane jacket, matt, adhesion-free surface
- Jacket colour
- up to 5-wires orange RAL 2003
- starting with 6-wires black RAL 9005

Part-No.	Number of strands/cross-section	Coil-Ø approx. mm	Spiral length, WL mm	Max. extension length, AL mm	Connection end, AE mm
PURFLEX					
190003	3G1.5	30	500	2250	250
190007	3G1.5	30	1000	4000	250
190012	3G1.5	30	1500	5750	250
190016	3G1.5	30	2000	7500	250
190004	4G1.5	33	500	2250	250
190008	4G1.5	33	1000	4000	250
190013	4G1.5	33	1500	5750	250
190017	4G1.5	33	2000	7500	250
190005	5G1.5	40	500	2250	250
190009	5G1.5	40	1000	4000	250
190014	5G1.5	40	1500	5750	250
190018	5G1.5	40	2000	7500	250
190559	5G1.5	40	2000	7000	600
190570	7G1.5	46	1000	4000	600
190560	7G1.5	46	2000	7000	600
190006	12G1.5	70	500	2250	250
190010	12G1.5	70	1000	4000	250
190015	12G1.5	70	1500	5750	250
190019	12G1.5	70	2000	7500	250

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

Design questionnaire for spiral cables

Company: _____

Contact person: _____

Department: _____

Street address: _____

Postal code, city/town: _____

Telephone: _____

Fax: _____



Germany
 Friedrich Lütze GmbH
 Tel.: +49 (0)71 51 60 53-0
 Fax: +49 (0)71 51 60 53-277(-288)
 info@luetze.de

Switzerland
 LÜTZE AG
 Tel.: +41 (0)55 450 23 23
 Fax: +41 (0)55 450 23 13
 info@luetze.ch

Austria
 LÜTZE Elektrotechnische
 Erzeugnisse Ges.m.b.H.
 Tel.: +43 (0)1 257 52 52-0
 Fax: +43 (0)1 257 52 52-20
 office@luetze.at

Please let us know your requirements using this design questionnaire for spiral cables:

L: _____ mm L0: _____ mm

Ø AD: _____ mm Ø WD: _____ mm

L1: _____ mm L2: _____ mm

L3: _____ mm L4: _____ mm

L5: _____ mm L6: _____ mm

Quantity: _____ pcs.

Purpose

Installation situation: _____

Winding direction: _____

Standard cable art. no.: _____

Jacket insulation material: _____


Number of strands: _____

Strand cross-section: _____ mm²


Shielding: yes no

Please fill out this questionnaire and fax it back to us. We will be happy to give you a quotation.


Thank you!

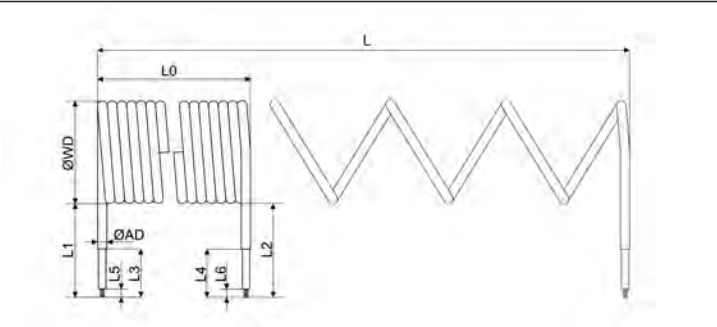

Cable outlets, radial

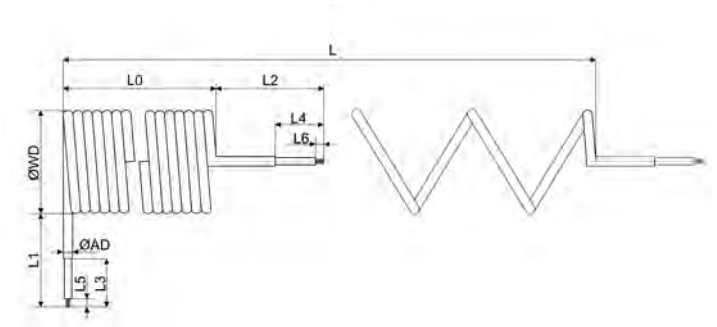


Cable outlets, radial and axial

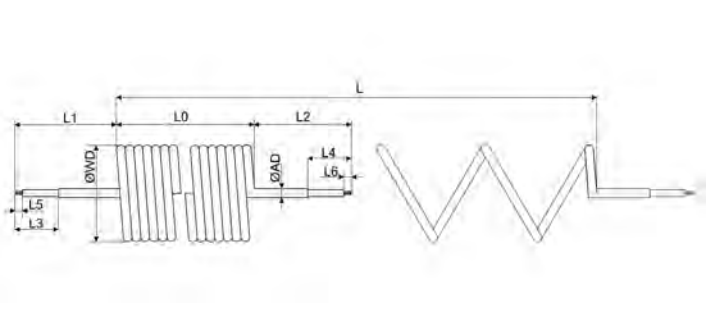

Cable outlets, axial

Comments

2. C-track cables

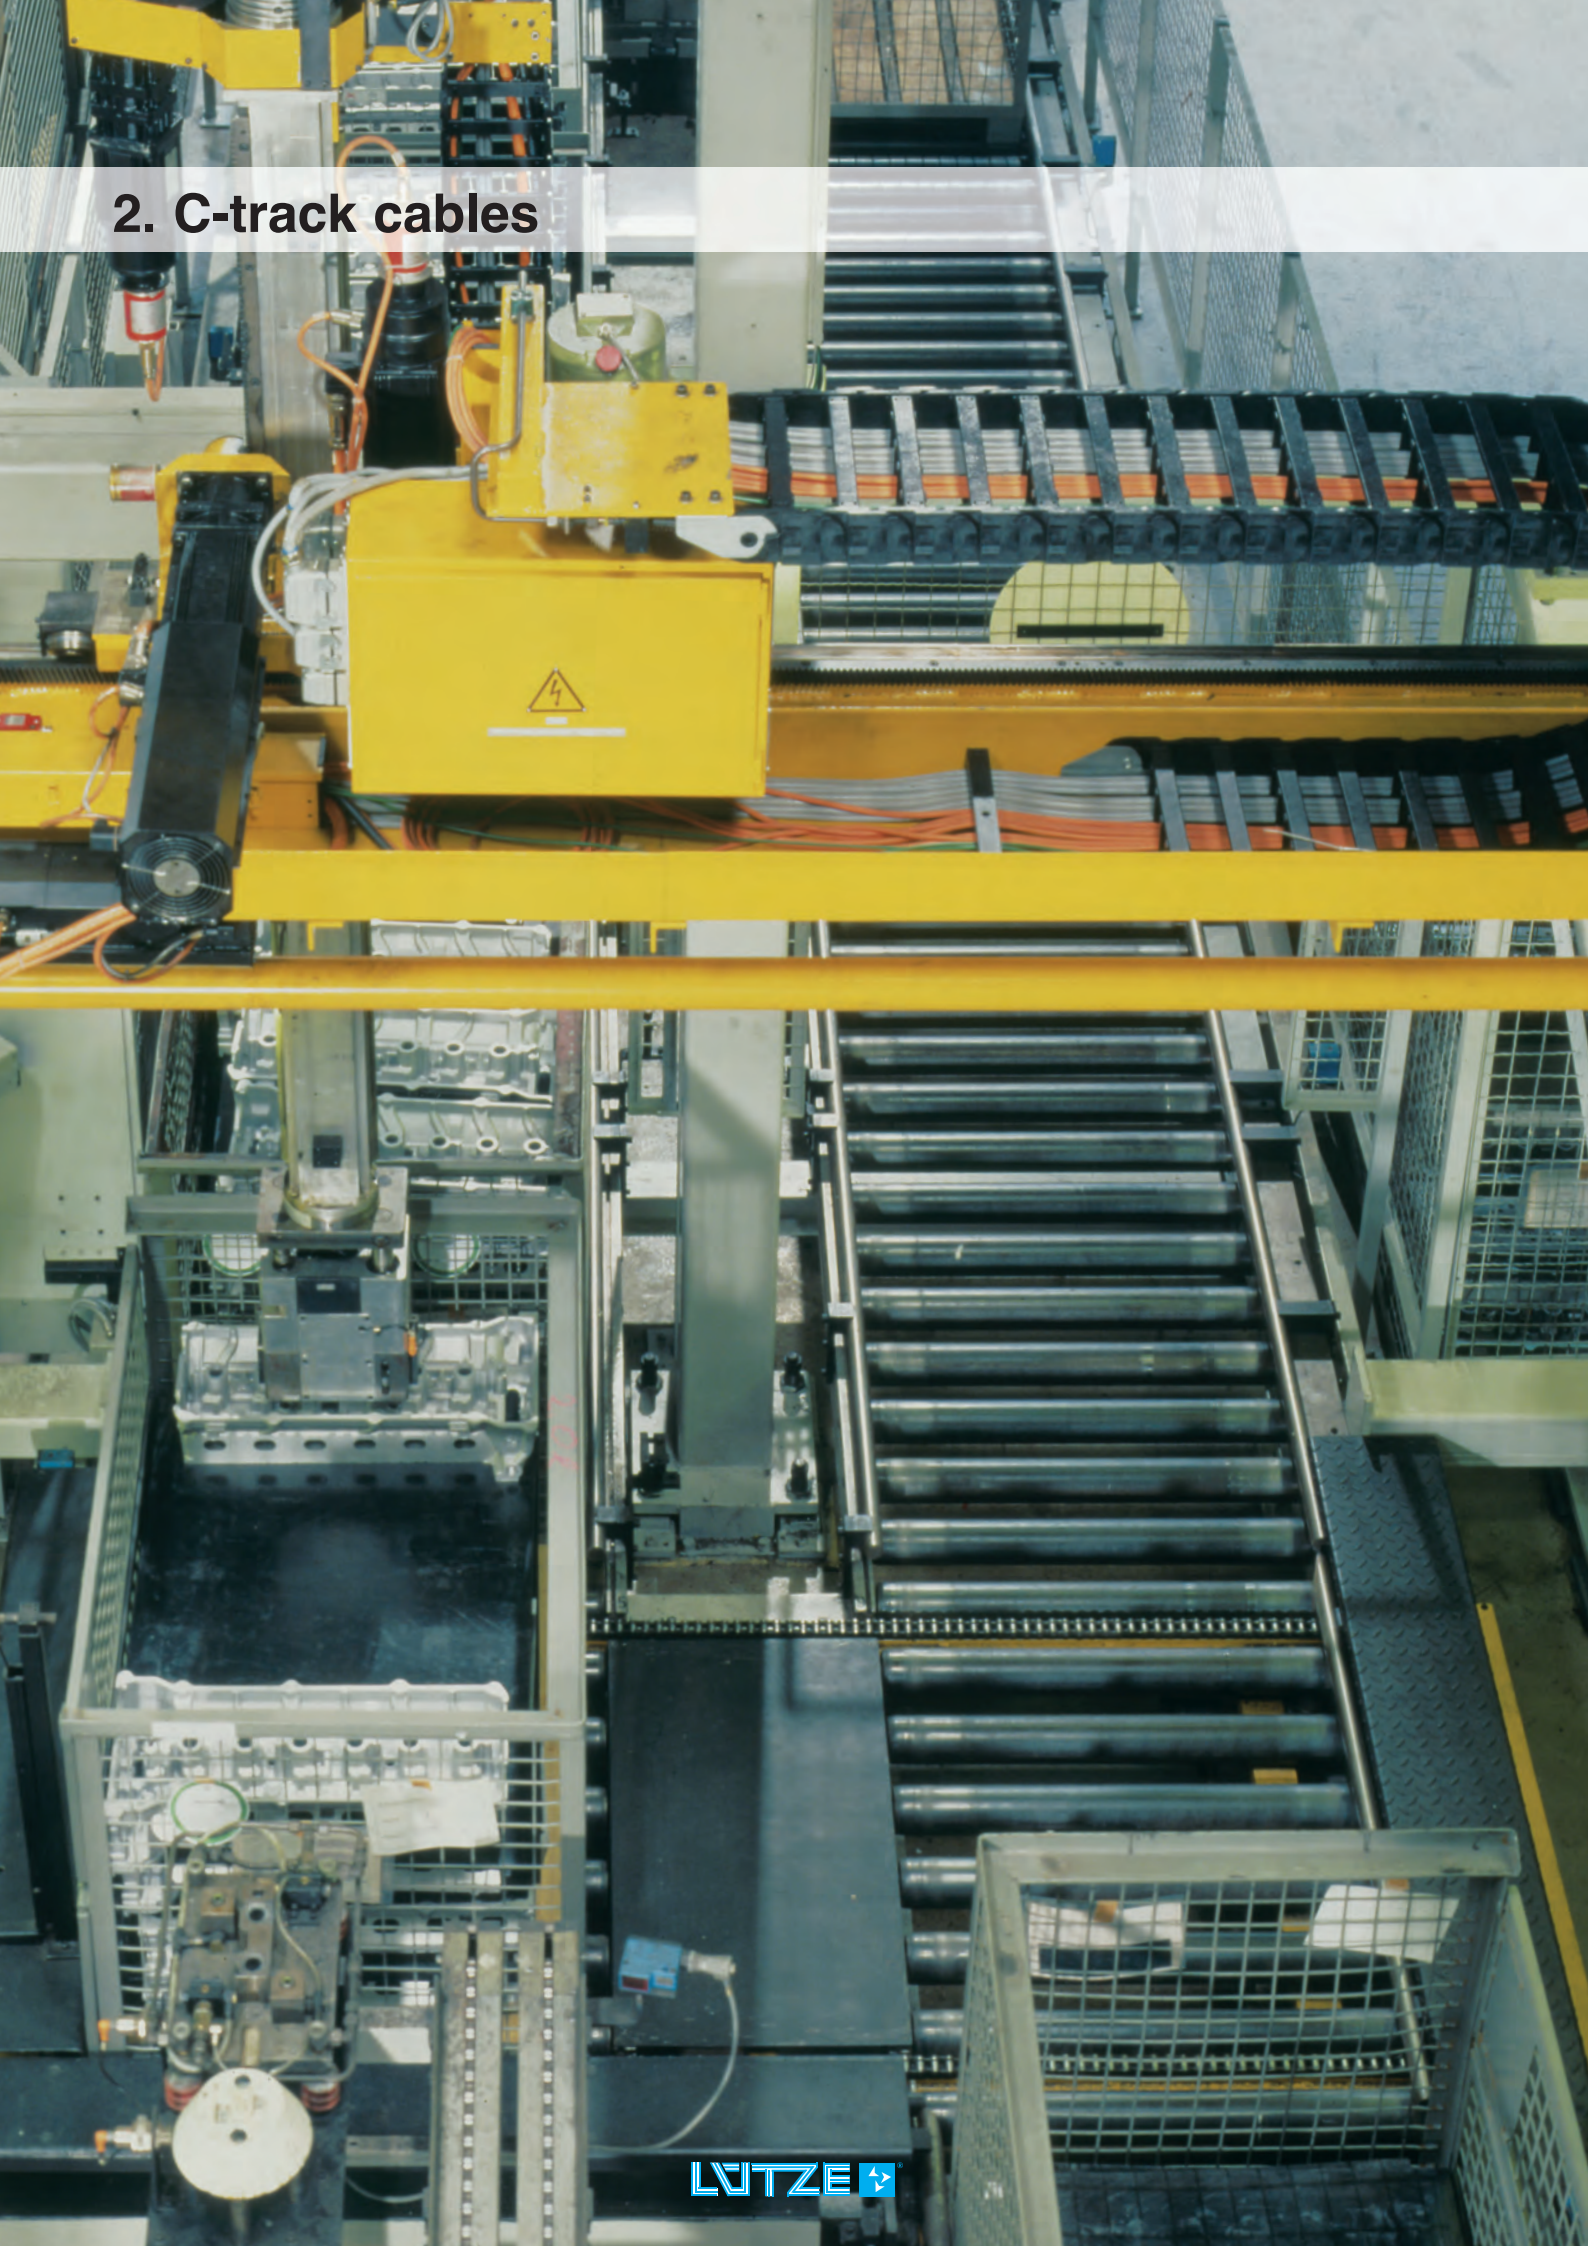


C-track cables · Overview




No. 1



No. 2



No. 3



No. 4



No. 5



No. 6



No. 7



No. 8



No. 9



No. 10



No. 11



No. 12

LÜTZE SUPERFLEX®

Product	Construction						Characteristics					Application/usage					Approvals					Page	No.		
	Isolation	Labelling	Inner jacket	Shield	Outer jacket	Cross-sectional area	Oil resistant	Abrasion-proof	Flexibel	Chemical resistant	Halogen free	Nominal voltage (V)	Application (Cable)	Flexible	Continuous use with compulsory guide	Torsion	Mechanical conditions	Temperature range °C	UL/CSA recognized	UL listed	VDE/HAR			FDA	CNOMO
LÜTZE SUPERFLEX® Plus N PUR UL 300 V	TPE	No.	-	-	PUR	0,5-1,0	●	●	●	●	●	300/500	Control	●	●	-	very high	-25 +80	●					2.4	1
LÜTZE SUPERFLEX® Plus N PUR UL 600 V	TPE	No.	-	-	PUR	0,5-2,5	●	●	●	●	●	600	Control	●	●	-	very high	-25 +80	●					2.5	2
LÜTZE SUPERFLEX® Plus N (C) PUR UL 300 V	TPE	No.	TPE	●	PUR	0,5-1,0	●	●	●	●	●	300/500	Control	●	●	-	very high	-25 +80	●					2.6	3
LÜTZE SUPERFLEX® Plus N (C) PUR UL 600 V	TPE	No.	TPE	●	PUR	0,5-2,5	●	●	●	●	●	600	Control	●	●	-	very high	-25 +80	●					2.7	4
LÜTZE SUPERFLEX® N TPE	TPE	No.	-	-	TPE	0,5-4,0	●	○	●	●	●	300/500	Control	●	●	-	high	-25 +90			●			2.8	5
LÜTZE SUPERFLEX® N (C) TPE	TPE	No.	-	●	TPE	0,5-4,0	●	○	●	●	●	300/500	Control	●	●	-	high	-25 +90			●			2.9	6
LÜTZE SUPERFLEX® N	PVC	No.	-	-	PVC	0,5-4	○		○		●	300/500	Control	●	●	-	medium	-5 +80						2.10	7
LÜTZE SUPERFLEX® N (C) Y	PVC	No.	PVC	●	PVC	0,5-6	○		○		●	300/500	Control	●	●	-	medium	-5 +80						2.11	8
LÜTZE SUPERFLEX® N MTW	PVC/ Nylon	No.	-	-	PVC	AWG 18-12	○		○		●	600	Control	●	●	-	medium	-5 +90	●	●				2.12	9
LÜTZE SUPERFLEX® N (C) Y MTW	PVC/ Nylon	No.	-	●	PVC	AWG 18-8	○		○		●	600	Control	●	●	-	medium	-5 +90	●	●				2.13	10
LÜTZE SUPERFLEX® N cULus	PVC	No.	-	-	PVC	0,5-4	○		○		●	600	Control	●	●	-	medium	-5 +80	●					2.14	11
LÜTZE SUPERFLEX® N ORC	PVC	No.	-	-	PVC	0,5-10	●		○		●	300/500	Control	●	●	-	medium	-5 +70				●		2.15	12

● = suitable
○ = conditionally suitable

C-track cables · Overview



No. 1



No. 2



No. 3



No. 4



No. 5



No. 6



No. 7



No. 8

LÜTZE SUPERFLEX®

Product	Construction						Characteristics					Application/usage				Approvals					Page	No.			
	Isolation	Labelling	Inner jacket	Shield	Outer jacket	Cross-sectional area	Oil resistant	Abrasion-proof	Flexible	Chemical resistant	Halogen free	Nominal voltage (V)	Application	Flexible	Continuous use with compulsory guide	Torsion	Mechanical conditions	Temperature range °C	UL/CSA recognized	UL listed			VDE/HAR	FDA	CNOMO
LÜTZE SUPERFLEX® TR PUR	TPE	coloured	-	-	PUR	0,14-0,34	●	●	●	●	●	300	Electronic cable	●	●	-	high	-25 +80	●					2.16	1
LÜTZE SUPERFLEX® TR (C) PUR	TPE	coloured	-	●	PUR	0,14-0,34	●	●	●	●	●	300	Electronic cable	●	●	-	high	-25 +80	●					2.17	2
LÜTZE SUPERFLEX® TR (C) PUR TP	TPE	coloured	-	●	PUR	0,25-0,75	●	●	●	●	●	300	Data cable	●	●	-	high	-25 +80	●					2.18	3
LÜTZE SUPERFLEX® TR AS PUR	TPE	coloured	-	-	PUR	0,34-0,5	●	●	●	●	●	300	Actuator sensor	●	●	-	high	-25 +80	●					2.19	4
LÜTZE SUPERFLEX® ASB PUR Kombi	TPE	coloured	-	-	PUR	0,34-1,0	●	●	●	●	●	300	Actuator sensor	●	●	-	high	-25 +80	●					2.19	5
LÜTZE SUPERFLEX® TR	TPE	coloured	-	-	PVC	0,14-0,34	○			○		300	Elektronic cable	●	●	-	medium	-5 +70	●					2.20	6
LÜTZE SUPERFLEX® TR (C) Y	TPE	coloured	-	●	PVC	0,14-0,34	○			○		300	Elektronic cable	●	●	-	medium	-5 +70	●					2.21	7
LÜTZE SUPERFLEX® TR (C) Y TP	PVC	coloured	-	●	PVC	0,25	○			○		300	Data cable	●	●	-	medium	-5 +70	●					2.21	8

● = suitable

○ = conditionally suitable

PUR c-track cables - For best performance

LÜTZE SUPERFLEX® PLUS N PUR UL 300 V



Application

- Machine and device construction, transport and conveyor technology
- Through full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments, in machines, plant and device construction

Properties

- Low capacitance, very good electrical properties
- Flame-retardant, self-extinguishing
- halogen-free, no corrosive gases
- Very good alternating bending strength
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

UL approval	300 V 80 °C
Voltage	
U ₀ /U	300/500 V
Test voltage	3000 V
Insulation resistance	min. 100 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 7
fixed	D × 4
Radiation-resistance	5 × 10 ⁸ cJ/kg
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; DIN EN 50265-2-1; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design


- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special TPE/HGI conductor insulation, UL certified
- Conductors black with white number print according to DIN EN 50334
- Ground conductor
G = with greenyellow ground conductor; x = without ground conductor
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over the stranded cable
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
113431	2x0.5	4.8	2.9	1.0
113441	3G0.5	4.9	3.5	1.5
113442	4G0.5	5.4	4.1	2.0
113443	5G0.5	5.8	4.8	2.4
113444	7G0.5	6.6	6.4	3.4
113446	12G0.5	8.0	9.6	5.9
113438	18G0.5	9.3	13.5	8.8
113447	25G0.5	11.0	18.2	12.2
0.75 mm²				
113432	2x0.75	5.2	4.0	1.5
113445	3G0.75	5.5	4.9	2.2
113439	3x0.75	5.5	4.9	2.2
113435	4G0.75	5.9	5.9	2.9
113422	5G0.75	6.5	6.9	3.4
113437	7G0.75	7.5	9.2	5.1
113425	12G0.75	9.0	14.2	8.8
113428	18G0.75	10.4	20.0	13.2
113448	25G0.75	12.4	27.2	18.3
1.0 mm²				
113484	2x1.0	5.6	4.8	2.0
113400	3G1.0	5.9	5.8	3.0
113433	4G1.0	6.4	7.1	4.0
113401	5G1.0	7.0	8.5	5.0
113402	7G1.0	8.2	11.3	6.9
113403	12G1.0	9.8	17.5	11.9
113404	18G1.0	11.4	24.9	17.8
113405	25G1.0	13.6	33.9	24.8

CE These products are in conformity with the EC Low Voltage Directive 73/23/EWG or 93/68/EWG respectively

PUR c-track cables - For best performance

LÜTZE SUPERFLEX® PLUS N PUR UL 600 V

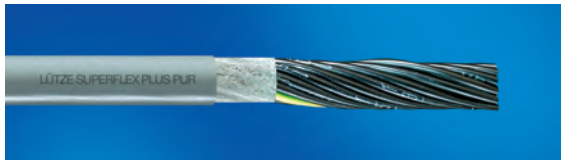

Application

- Machine and device construction, transport and conveyor technology
- Through full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments, in machines, plant and device construction

Properties

- Low capacitance, very good electrical properties
- Flame-retardant, self-extinguishing
- halogen-free, no corrosive gases
- Very good alternating bending strength
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

UL approval	600 V 80 °C
Voltage	
U ₀ /U	300/500 V
Test voltage	6000 V
Insulation resistance	min. 100 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 7
fixed	D × 4
Radiation-resistance	5×10 ⁸ cJ/kg
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design


- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special TPE/HGI conductor insulation, UL certified
- Conductors black with white number print according to DIN EN 50334
- Ground conductor
G = with greenyellow ground conductor; x = without ground conductor
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over the stranded cable
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
113560	2x0.5	6.1	4.3	1.0
113561	3G0.5	6.5	4.9	1.5
113562	4G0.5	6.9	5.8	2.0
113563	5G0.5	7.4	6.6	2.5
113564	7G0.5	8.5	8.6	3.4
113565	12G0.5	10.0	12.6	5.9
113566	18G0.5	11.6	17.3	8.8
113567	25G0.5	13.7	23.2	12.3
1.0 mm²				
113570	2x1.0	7.0	6.0	2.0
113571	3G1.0	7.4	7.1	3.0
113572	4G1.0	7.9	8.5	4.0
113573	5G1.0	8.5	10.1	5.0
113574	7G1.0	9.9	13.2	6.9
113575	12G1.0	11.9	20.1	11.9
113576	18G1.0	13.6	28.1	17.8
113577	25G1.0	16.3	37.9	24.8
1.5 mm²				
113485	2x1.5	7.2	7.7	2.9
113406	3G1.5	8.0	9.3	4.4
113412	4G1.5	8.7	11.3	5.9
113407	5G1.5	9.5	13.3	7.4
113408	7G1.5	11.1	17.5	10.3
113409	12G1.5	13.2	26.9	17.6
113410	18G1.5	15.0	38.0	26.5
113411	25G1.5	18.4	51.5	36.9
2.5 mm²				
113483	3G2.5	9.2	13.3	7.3
113415	4G2.5	9.9	16.2	9.8
113416	5G2.5	10.9	19.3	12.2
113417	7G2.5	12.6	25.9	17.0
113426	12G2.5	15.1	40.4	28.6
113479	18G2.5	17.6	57.7	43.8

CE These products are in conformity with the EC Low Voltage Directive 73/23/EWG or 93/68/EWG respectively

PUR c-track cables - For best performance

LÜTZE SUPERFLEX® PLUS N (C)PUR UL 300 V

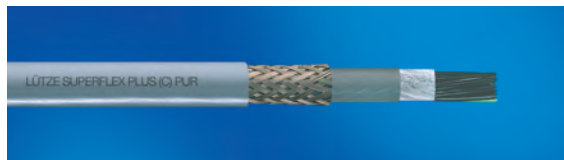

Application

- Machine and device construction, transport and conveyor technology
- Through full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments with high interference potential, in machines, plant and device construction

Properties

- High active and passive interference resistance
- Braided shield optimised for continuous flexible use
- Low capacitance, very good electrical properties
- Flame-retardant, self-extinguishing
- halogen-free, no corrosive gases
- Very good alternating bending strength
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene (see tech. information)
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

UL approval	300 V 80 °C
Voltage	
U ₀ /U	300/500 V
Test voltage	3000 V
Insulation resistance	min. 100 MΩ x km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D x 10
fixed	D x 6
Radiation-resistance	5x10 ⁸ cJ/kg
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design


- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special TPE/HGI conductor insulation, UL certified
- Conductors black with white number print
- Ground conductor
- G = with greenyellow ground conductor; x = without ground conductor
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over the stranded cable
- Inside jacket TPE
- Tinned copper wire braid, optical covering ≥ 85 %
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
113300	(3G0.5)	6.6	5.6	2.7
113347	(4G0.5)	7.0	6.4	3.3
113301	(5G0.5)	7.5	7.3	3.9
113302	(7G0.5)	8.3	9.1	5.1
113303	(12G0.5)	9.7	12.8	7.9
113304	(18G0.5)	11.0	17.9	11.9
113305	(25G0.5)	12.0	23.4	15.9
0.75 mm²				
113328	(2x0.75)	6.9	6.3	2.8
113306	(3G0.75)	7.5	7.2	3.6
113430	(3x0.75)	7.5	7.2	3.6
113325	(4G0.75)	7.8	8.4	4.5
113345	(4x0.75)	7.8	8.4	4.5
113307	(5G0.75)	8.3	9.7	5.3
113308	(7G0.75)	9.4	12.4	7.1
113309	(12G0.75)	11.3	18.8	12.0
113310	(18G0.75)	13.0	25.4	16.9
113311	(25G0.75)	14.9	33.4	22.8
1.0 mm²				
113312	(3G1.0)	7.8	8.4	4.5
113324	(4G1.0)	8.3	9.9	5.6
113313	(5G1.0)	9.1	11.4	6.8
113314	(7G1.0)	10.2	14.7	9.1
113315	(12G1.0)	12.1	22.5	15.4
113316	(18G1.0)	14.0	30.6	22.0
113317	(25G1.0)	15.8	41.5	30.5

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PUR c-track cables - For best performance

LÜTZE SUPERFLEX® PLUS N (C)PUR UL 600 V

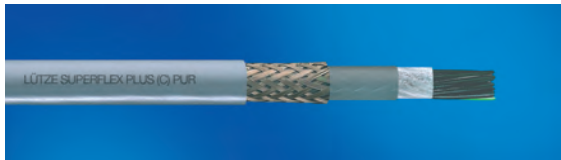

Application

- Machine and device construction, transport and conveyor technology
- Through full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments with high interference potential, in machines, plant and device construction

Properties

- High active and passive interference resistance
- Braided shield optimised for continuous flexible use
- Low capacitance, very good electrical properties
- Flame-retardant, self-extinguishing
- halogen-free, no corrosive gases
- Very good alternating bending strength
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene (see tech. information)
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

UL approval	600 V 80 °C
Voltage	
U ₀ /U	300/500 V
Test voltage	6000 V
Insulation resistance	min. 100 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 10
fixed	D × 6
Radiation-resistance	5×10 ⁸ cJ/kg
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special TPE/HGI conductor insulation, UL certified
- Conductors black with white number print
- Ground conductor
- G = with greenyellow ground conductor; x = without ground conductor
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over the stranded cable
- Inside jacket TPE
- Tinned copper wire braid, optical covering ≥ 85 %
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
113350	(3G0.5)	7.9	7.6	2.9
113351	(4G0.5)	8.3	8.7	3.5
113352	(5G0.5)	8.9	9.9	4.2
113353	(7G0.5)	9.9	12.2	5.5
113354	(12G0.5)	11.6	17.8	9.2
113355	(18G0.5)	13.2	23.3	12.7
113356	(25G0.5)	15.2	30.1	16.9
1.0 mm²				
113360	(3G1.0)	8.7	10.3	4.7
113361	(4G1.0)	9.3	11.9	5.8
113362	(5G1.0)	9.9	13.7	7.0
113363	(7G1.0)	11.4	18.3	10.1
113364	(12G1.0)	13.3	26.1	15.8
113365	(18G1.0)	15.1	35.0	22.4
113366	(25G1.0)	17.9	49.0	33.2
1.5 mm²				
113346	(2x1.5)	9.0	11.8	4.7
113318	(3G1.5)	9.7	12.5	6.3
113331	(4G1.5)	10.5	14.7	8.7
113319	(5G1.5)	11.3	17.8	10.4
113320	(7G1.5)	12.9	22.7	13.8
113321	(12G1.5)	15.1	33.1	22.0
113322	(18G1.5)	17.2	45.9	32.4
113323	(25G1.5)	19.7	63.2	46.3
2.5 mm²				
113341	(3G2.5)	10.6	16.8	9.5
113332	(4G2.5)	11.9	21.1	12.9
113339	(5G2.5)	12.6	24.5	15.7
113340	(7G2.5)	14.8	31.8	21.2
113344	(12G2.5)	16.7	48.4	35.2
113342	(18G2.5)	19.4	69.3	53.2

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

TPE c-track cables - For best performance

LÜTZE SUPERFLEX® N TPE



Application

- Machine and device construction, transport and conveyor technology
- Due to TPE jacket suitable for C-tracks
- Mechanical and plant engineering for special areas such as the food and beverage industry, chemical, pharmaceutical and agromomic enterprises, installations for bioenergy production as well as composting and sewage treatment plants.
- Resistant to acids and alkalines, specially resistant to biological media (bio-oil, lactic acid) as well as detergents.
- Cut and abrasion resistant

Properties

- Low capacitance, very good electrical properties
- Halogen-free, no corrosive gases
- Very good alternating bending strength
- Stability against acids, alkalines and watery solutions
- Limited weather resistant
- High elasticity, cut and heat resistance
- Jacket material approved according to FDA 21 CFR for non-oiling food
- Free from paint-wetting impairment substances (PWIS-free), RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
Test voltage	3000 V
Insulation resistance	min. 100 MΩ x km
Temperature range	
moving	-25 °C to +90 °C
fixed	-40 °C to +105 °C
Minimum bending radius	
moving	D x 10
fixed	D x 4
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1; EN 60684-2

Design


- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special-TPE/HGI conductor insulation
- Conductors black with white number print according to DIN EN 50334
- Ground conductor
G = with greenyellow ground conductor; x = without ground conductor
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over stranded cable
- Outer jacket vulcanized TPE compound on Polyolefin base
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
111980	2x0,5	4.5	2.2	1.0
111981	3G0,5	4.7	2.8	1.5
111982	4G0,5	5.1	3.5	1.9
111983	5G0,5	5.6	4.2	2.4
111984	7G0,5	6.5	5.0	3.4
111985	12G0,5	7.9	8.8	5.8
111886	18G0,5	9.2	12.6	8.7
111887	25G0,5	11.1	17.4	12.1
0.75 mm²				
111888	2x0,75	4.9	2.9	1.4
111889	3G0,75	5.1	3.7	2.2
111890	4G0,75	5.7	4.8	2.9
111891	5G0,75	6.2	5.7	3.6
111892	7G0,75	7.2	7.5	5.1
111893	12G0,75	8.8	12.0	8.7
111894	18G0,75	10.4	17.6	13.0
111895	25G0,75	12.5	24.3	18.1
1.0 mm²				
111896	2x1,0	5.3	3.6	2.0
111897	3G1,0	5.7	4.7	2.9
111898	4G1,0	6.2	6.0	3.9
111899	5G1,0	6.7	7.2	4.9
111900	7G1,0	8.0	9.7	6.9
111901	12G1,0	9.8	15.7	11.8
111902	18G1,0	11.4	22.7	17.6
111903	25G1,0	13.7	31.4	24.5
1.5 mm²				
111904	2x1,5	6.2	5.2	2.9
111905	3G1,5	6.6	6.6	4.4
111906	4G1,5	7.1	8.5	5.8
111907	5G1,5	8.0	10.4	7.3
111908	7G1,5	9.3	13.8	10.2
111909	12G1,5	11.4	22.5	17.5
111910	18G1,5	13.5	33.0	26.2
111911	25G1,5	16.2	45.5	36.4
2.5 mm²				
111912	2x2,5	7.2	7.7	4.8
111913	3G2,5	7.8	10.2	7.2
111914	4G2,5	8.5	13.2	9.6
111915	5G2,5	9.3	15.9	12.0
111916	7G2,5	11.1	21.6	16.9
111917	12G2,5	13.6	35.2	28.9
111918	18G2,5	16.1	51.7	43.4
111919	25G2,5	19.4	71.5	60.2
4 mm²				
111920	2x4	8.7	11.7	7.7
111921	3G4	9.2	15.4	11.6
111922	4G4	10.3	20.1	15.4
111923	5G4	11.3	24.3	19.3
111924	7G4	13.5	33.1	27.0

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

TPE c-track cables - For best performance

LÜTZE SUPERFLEX® N (C) TPE

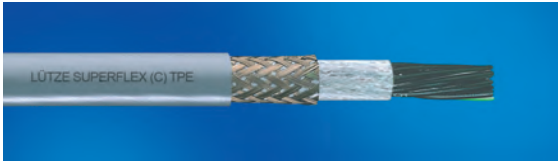

Application

- Machine and device construction, transport and conveyor technology
- Due to TPE jacket suitable for C-tracks
- Mechanical and plant engineering for special areas such as the food and beverage industry, chemical, pharmaceutical and agromomic enterprises, installations for bioenergy production as well as composting and sewage treatment plants.
- Resistant to acids and alkalines, specially resistant to biological media (bio-oil, lactic acid) as well as detergents.
- Cut and abrasion resistant

Properties

- Low capacitance, very good electrical properties
- High active and passive interference resistance
- Braided shield optimised for continuous flexible use
- halogen-free, no corrosive gases
- Very good alternating bending strength
- Resistance to acids, alkalines and watery solutions
- Limited weather resistant
- High elasticity, cut and heat resistance
- Jacket material approved according to FDA 21 CFR for non-oiling food
- Free from paint-wetting impairment substances (PWIS-free), RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
Test voltage	3000 V
Insulation resistance	min. 100 MΩ × km
Temperature range	
moving	-25 °C to +90 °C
fixed	-40 °C to +105 °C
Minimum bending radius	
moving	D × 10
fixed	D × 4
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1; EN 60684-2

Design


- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special-TPE/HGI conductor insulation
- Conductors black with white number print according to DIN EN 50334
- Ground conductor
G = with greenyellow ground conductor; x = without ground conductor
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over stranded cable
- Meshwork shielding from galvanised Cu wire, optical covering ≥ 85 %
- Outer jacket vulcanized TPE compound on Polyolefin base
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
111930	(2x0,5)	5.1	3.2	1.9
111931	(3G0,5)	5.3	3.8	2.5
111932	(4G0,5)	5.8	4.7	3.1
111933	(5G0,5)	6.2	5.5	3.7
111975	(7G0,5)	7.1	7.0	4.9
111934	(12G0,5)	8.5	10.5	7.7
111935	(18G0,5)	10.1	15.6	11.7
111936	(25G0,5)	11.9	21.0	15.8
0.75 mm²				
111937	(2x0,75)	5.6	4.1	2.5
111938	(3G0,75)	5.9	4.9	3.3
111939	(4G0,75)	6.3	6.0	4.2
111940	(5G0,75)	6.8	7.0	5.0
111941	(7G0,75)	8.0	9.2	6.8
111942	(12G0,75)	9.4	14.0	10.8
111943	(18G0,75)	11.1	20.7	16.4
111944	(25G0,75)	13.2	28.1	22.2
1.0 mm²				
111945	(2x1,0)	6.0	4.9	3.2
111946	(3G1,0)	6.3	5.9	4.2
111947	(4G1,0)	6.8	7.3	5.3
111948	(5G1,0)	7.3	8.7	6.5
111949	(7G1,0)	8.6	11.4	8.8
111950	(12G1,0)	10.5	18.6	14.9
111951	(18G1,0)	12.2	26.4	21.4
111952	(25G1,0)	14.4	35.5	29.0
1.5 mm²				
111953	(2x1,5)	6.8	6.4	4.3
111954	(3G1,5)	7.2	8.0	5.9
111955	(4G1,5)	7.9	10.2	7.5
111956	(5G1,5)	8.6	12.1	9.2
111957	(7G1,5)	10.2	16.8	13.2
111958	(12G1,5)	12.3	26.1	21.2
111959	(18G1,5)	14.2	36.9	30.7
111960	(25G1,5)	17.3	53.4	44.8
2.5 mm²				
111961	(2x2,5)	8.0	9.3	6.5
111962	(3G2,5)	8.4	11.8	9.1
111963	(4G2,5)	9.1	14.9	11.7
111964	(5G2,5)	10.2	18.8	15.1
111965	(7G2,5)	12.0	25.0	20.5
111966	(12G2,5)	14.4	39.1	33.5
111967	(18G2,5)	17.2	59.5	51.7
111968	(25G2,5)	20.6	81.0	70.4
4 mm²				
111969	(2x4)	9.3	13.2	9.8
111970	(3G4)	10.4	18.1	14.6
111971	(4G4)	11.0	22.8	18.8
111972	(5G4)	12.2	27.7	23.0
111973	(7G4)	14.2	36.8	31.5

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC c-track cables

LÜTZE SUPERFLEX® N

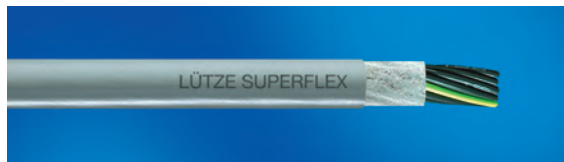

Application

- Machine and device construction, transport and conveyor technology, heating, climate technology
- In dry and moist rooms
- As control, measurement and control cable for continuous moving and medium operating conditions
- In energy command chains and everywhere where signals are transmitted to continuously moving system or machine parts

Properties

- Through construction and material suitable for continuous movement application.
- PVC Flame-retardant, self-extinguishing
- Widely resistant to oils, greases, acids and bases (see tech. information)
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Voltage	300/500 V
U_0/U	
Test voltage	3000 V
Insulation resistance	min. 20 MΩ × km
Temperature range	
moving	-5 °C to +80 °C
fixed	-25 °C to +80 °C
Minimum bending radius	
moving	D × 10
fixed	D × 4
Jacket material	Thermal pressure resistance according to DIN VDE 60881 up to 80 °C
Cold flexibility	-25 °C
Radiation-resistance	8×10^7 cJ/kg
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2 DIN EN 50265-2 IEC 60332-1

Design


- Bare copper wire, superfine strand according to DIN VDE 0295 Kl. 6, IEC 60228 cl. 6
- Special PVC conductor insulation TI2 according to VDE 0281 or HD 21.1
- Conductors black with white number print according to DIN EN 50334
- Ground conductor
G = with greenyellow ground conductor; x = without ground conductor
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over stranded cable
- Jacket special PVC TM3 according to VDE 0281 or HD21.1
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
101049	3G0.5	5.1	4.0	1.5
118383	4G0.5	5.5	4.8	2.0
118393	5G0.5	5.9	5.6	2.5
118384	7G0.5	6.8	7.0	3.4
101351	12G0.5	8.2	10.8	5.8
101048	18G0.5	9.5	15.0	8.6
108055	25G0.5	11.5	19.6	12.7
0.75 mm²				
100765	2x0.75	5.2	4.4	1.4
100766	3G0.75	5.6	5.2	2.2
111045	4G0.75	6.0	6.3	2.9
100767	5G0.75	6.6	7.4	3.6
100768	7G0.75	7.5	9.4	5.0
100998	12G0.75	9.3	14.9	8.8
100901	14G0.75	9.5	16.8	10.3
100778	18G0.75	10.5	20.8	13.2
100856	25G0.75	12.5	28.2	18.3
1.0 mm²				
100788	2x1.0	5.7	5.2	2.0
100789	3G1.0	5.9	6.3	3.0
100761	4G1.0	6.5	7.6	4.0
100777	5G1.0	7.0	8.9	5.0
100790	7G1.0	8.2	11.5	6.9
100791	12G1.0	9.8	18.2	11.9
100782	18G1.0	11.4	25.8	17.8
100784	25G1.0	13.7	35.0	24.8
100771	34G1.0	15.5	45.9	33.7
100779	42G1.0	16.5	55.4	41.6
1.5 mm²				
101424	2x1.5	6.6	7.7	2.9
100796	3G1.5	6.7	9.3	4.4
100787	4G1.5	7.2	11.4	5.9
100808	5G1.5	8.0	13.5	7.4
100792	7G1.5	9.2	17.5	10.3
100793	12G1.5	11.3	28.1	17.7
100794	18G1.5	13.0	40.0	26.5
100795	25G1.5	15.6	54.5	36.8
2.5 mm²				
100987	2x2.5	8.0	10.8	4.8
100893	3G2.5	8.2	13.4	7.2
100707	4G2.5	9.2	16.6	9.6
100769	5G2.5	9.9	19.8	12.0
100797	7G2.5	11.8	26.0	16.8
100807	12G2.5	14.5	42.3	28.8
100900	18G2.5	18.5	60.7	43.2
4 mm²				
100988	2x4	9.6	21.0	7.7
108049	4G4	11.8	30.0	15.4
108045	5G4	13.2	38.0	19.2
100154	7G4	15.9	48.0	26.8

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC c-track cables

LÜTZE SUPERFLEX® N (C)Y

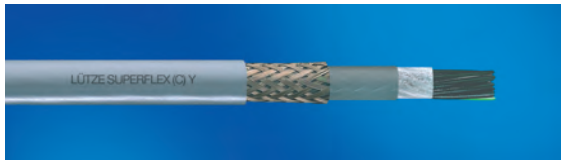

Application

- Machine and device construction, transport and conveyor technology, heating, climate technology
- In dry and moist rooms
- As control, measurement and control cable for continuous moving and medium operating conditions
- In energy command chains and everywhere where signals are transmitted to continuously moving system or machine
- Especially for industrial environment with high interference potential, in machine, plant and device construction

Properties

- Through construction and material suitable for continuous movement application.
- High active and passive interference resistance
- PVC Flame-retardant, self-extinguishing
- Largely resistant to oils, greases, acids and bases (see tech. information)
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
Test voltage	3000 V
Insulation resistance	min. 20 MΩ × km
Temperature range	
moving	-5 °C to +80 °C
fixed	-25 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 6
Jacket material	Thermal pressure resistance according to DIN VDE 60881 up to 80 °C
Cold flexibility	to -25 °C
Radiation-resistance	8×10 ⁷ cJ/kg
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2 DIN EN 50265-2 IEC 60332-1

Design

- Bare copper wire, superfine strand according to DIN VDE 0295 Kl. 6, IEC 60228 cl. 6
- Special PVC conductor insulation TI2 according to VDE 0281 or HD 21.1
- Conductors black with white number print according to DIN EN 50334
- Ground conductor
G = with greenyellow ground conductor; x = without ground conductor
- Conductors twisted without mechanical stress, layer pitch optimised
- Inside jacket PVC
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Non-woven material over stranded cable
- Jacket special PVC TM3 according to VDE 0281 or HD21.1
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
110446	(2×0.5)	6.6	6.1	2.2
101288	(3G0.5)	6.8	6.8	2.8
108800	(4G0.5)	7.1	7.7	3.4
118039	(5G0.5)	7.5	8.7	4.0
108801	(7G0.5)	8.7	10.3	5.1
108802	(12G0.5)	10.0	15.0	8.0
0.75 mm²				
110489	(2×0.75)	7.0	7.3	2.8
108803	(3G0.75)	7.2	8.2	3.6
108000	(4G0.75)	7.2	8.2	3.6
111245	(5G0.75)	8.1	10.8	5.4
108001	(7G0.75)	8.6	13.1	7.0
110563	(12G0.75)	8.6	13.1	7.0
108002	(18G0.75)	12.1	27.2	16.9
110564	(25G0.75)	14.0	35.6	22.7
1.0 mm²				
111246	(2×1.0)	7.3	8.3	3.5
111215	(3G1.0)	7.6	9.4	4.5
110567	(4G1.0)	8.1	11.0	5.7
118042	(5G1.0)	8.6	12.6	6.8
118239	(7G1.0)	9.2	15.4	8.9
111001	(12G1.0)	11.5	24.1	15.4
111247	(18G1.0)	13.0	32.6	21.9
111248	(25G1.0)	15.3	43.8	30.4
1.5 mm²				
110947	(2×1.5)	8.1	11.4	4.8
110954	(3G1.5)	8.5	13.2	6.3
110499	(4G1.5)	9.0	14.6	8.0
118194	(5G1.5)	10.4	18.8	10.5
111303	(7G1.5)	11.2	23.2	13.7
111304	(12G1.5)	14.0	35.5	22.1
111305	(18G1.5)	16.0	49.4	32.5
111306	(25G1.5)	19.3	68.1	46.5
2.5 – 6 mm²				
110608	(3G2.5)	10.0	18.6	10.3
108003	(4G2.5)	10.9	22.2	13.0
118111	(4G4)	13.8	40.0	21.2
110701	(5G2.5)	11.0	25.9	15.8
111329	(7G2.5)	13.0	32.6	21.0

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC C-track cables with UL-MTW/CSA

LÜTZE SUPERFLEX® N MTW



Application

- Multi-strand, highly flexible cable for steering, measuring and control technology
- For medium duty C-track applications up to 10 m and other applications with degree shaped alternating bending
- Suitable for all common types of C-tracks
- Complies with **NFPA 79** for "machine tool wiring" (MTW, TC-ER)

Properties

- Small outer diameter due to **PVC/Nylon** insulation according to UL 1063
- Highly flexible due to ultra-fine copper conductors
- Resistant to microbes and hydrolysis
- Talcum-free
- Use in dry or damp environment
- Free from paint-wetting impairment substances (PWIS-free), RoHS-compliant

Technical data

Nominal voltage	600 V UL MTW
Test voltage	3000 V
Insulation resistance	min. 100 MΩ × km
Temperature range	
moving	-5 °C to +90 °C
fixed	-40 °C to +90 °C
Minimum bending radius	
moving	D × 10
fixed	D × 5
Burning behaviour	Flame-retardant UL 1581 section 1080 (VW-1) and DIN EN 50265-2-1
Oil resistant	UL 4d100C and DIN EN 60811-2-1

Design


- Bare copper wire, superfine strand according to DIN VDE 0295 Kl. 6, IEC 60228 cl. 6
- Isolation PVC/Nylon
- Conductors black with white number print according to DIN EN 50334
- Ground conductor
G = with greenyellow ground conductor; x = without ground conductor
- Strands twisted short for constantly moving use, demonstrated through alternating bending test
- Special PVC jacket UL class 43 / VDE 0207 TM5
- Jacket colour grey RAL 7001
- Fleece wrapping
- Listed according to UL 1063 MTW, UL 1277 TC-ER
Recognized according to UL 758 AWM, Style 1015
In compliance with Low Voltage Directive 2006/95/EG

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
AWG 18				
109271	3 G AWG 18	7.6	8.6	2.7
109272	4 G AWG 18	8.3	10.5	3.7
109273	5 G AWG 18	9.1	12.5	4.6
109274	7 G AWG 18	10.6	16.9	6.4
109275	12 G AWG 18	12.4	24.2	11.0
AWG 16				
109277	3 G AWG 16	8.5	11.2	4.3
109278	4 G AWG 16	9.2	13.7	5.3
109279	5 G AWG 16	9.9	16.9	7.1
109280	7 G AWG 16	11.7	23.0	10.0
109281	12 G AWG 16	14.6	36.2	17.1
AWG 14				
109283	3 G AWG 14	9.4	15.2	7.4
109284	4 G AWG 14	10.4	19.5	9.8
109285	5 G AWG 14	11.2	23.4	12.3
109286	7 G AWG 14	13.5	32.9	17.2
109287	12 G AWG 14	16.7	51.5	29.5
AWG 12				
109288	3 G AWG 12	10.7	21.5	12.4
109289	4 G AWG 12	11.6	27.6	16.6
109290	5 G AWG 12	12.7	33.9	20.7

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

Shielded PVC C-track cables with UL-MTW/CSA

LÜTZE SUPERFLEX® N (C)Y MTW

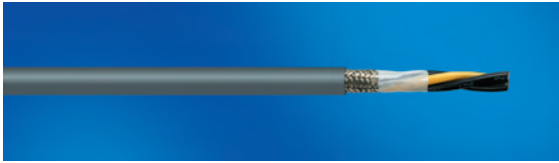

Application

- Shielded multi-strand, highly flexible cable for steering, measuring and control technology.
- For medium duty C-track applications up to 10 m and other applications with degree shaped alternating bending
- Suitable for all common types of C-tracks
- Complies with **NFPA 79** for "machine tool wiring" (MTW, TC-ER)

Properties

- Small outer diameter due to **PVC/Nylon** insulation according to UL 1063
- Highly flexible due to ultra-fine copper conductors
- Shield composed of tinned copper braid guarantees good MC properties
- Resistant to microbes and hydrolysis
- Talcum-free
- Use in dry or damp environment
- Free from paint-wetting impairment substances (PWIS-free), RoHS-compliant

Technical data

Nominal voltage	600 V UL MTW
Test voltage	3000 V
Insulation resistance	min. 100 MΩ × km
Temperature range	
moving	-5 °C to +90 °C
fixed	-40 °C to +90 °C
Minimum bending radius	
moving	D × 10
fixed	D × 5
Burning behaviour	Flame-retardant UL 1581 section 1080 (VW-1) and DIN EN 50265-2-1
Oil resistant	UL 4d100C and DIN EN 60811-2-1

Design

- Bare copper wire, superfine strand according to DIN VDE 0295 Kl. 6, IEC 60228 cl. 6
- Insulation PVC/Nylon
- Conductors black with white number print according to DIN EN 50334
- Ground conductor
G = with greenyellow ground conductor; x = without ground conductor
- Strands twisted short for constantly moving use, demonstrated through alternating bending test
- Special PVC jacket UL class 43 / VDE 0207 TM5
- Jacket colour grey RAL 7001
- Fleece wrapping
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Listed according to UL 1063 MTW, UL 1277 TC-ER
Recognized according to UL 758 AWM, Style 1015
In compliance with Low Voltage Directive 2006/95/EG

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
AWG 18				
109241	(3 G AWG 18)	8.0	10.4	4.3
109242	(4 G AWG 18)	8.7	12.7	5.5
109243	(5 G AWG 18)	9.5	14.9	6.6
109244	(7 G AWG 18)	11.0	19.6	8.8
109245	(12 G AWG 18)	13.0	29.5	15.7
AWG 16				
109247	(3 G AWG 16)	8.9	13.3	6.1
109248	(4 G AWG 16)	9.6	16.1	7.8
109249	(5 G AWG 16)	10.4	19.3	9.4
109250	(7 G AWG 16)	12.3	26.8	14.1
109251	(12 G AWG 16)	15.4	42.4	22.5
AWG 14				
109253	(3 G AWG 14)	9.8	17.6	9.5
109254	(4 G AWG 14)	10.8	22.1	12.2
109255	(5 G AWG 14)	11.8	28.1	16.5
109256	(7 G AWG 14)	15.0	40.7	21.9
109257	(12 G AWG 14)	17.3	58.5	35.7
AWG 12				
109259	(3 G AWG 12)	11.3	25.8	16.2
109258	(4 G AWG 12)	11.6	32.4	20.9
109260	(5 G AWG 12)	13.6	40.1	25.4
AWG 10				
109261	(4 G AWG 10)	16.2	50.3	29.8
AWG 8				
109262	(4 G AWG 8)	21.2	84.8	51.1

PVC c-track cables - UL/CSA 600 V

LÜTZE SUPERFLEX® N cULus



Application

- Machine and device construction, transport and conveyor technology, heating, climate technology
- In dry and moist rooms
- As control, measurement and control cable for continuous moving and medium operating conditions
- In energy command chains and everywhere where signals are transmitted to continuously moving system or machine parts

Properties

- Minimal cable diameter through special TPE/HGI conductor insulation according to UL
- Low capacitance, very good electrical properties
- Through construction and material suitable for continuous movement application.
- Outer jacket special-PVC Class 43 according to UL
- Largely resistant to oils, greases, acids and bases (see tech. information)
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
UL	600 V
Test voltage	6000 V
Insulation resistance	min. 100 MΩ x km
Temperature range	
moving	-5 °C to +80 °C
fixed	-25 °C to +80 °C
Minimum bending radius	
moving	D x 10
fixed	D x 4
Jacket material	Thermal pressure resistance according to DIN VDE 60881 up to 90 °C
Cold flexibility	according to UL up to -25 °C
Radiation-resistance	8x10 ⁷ cJ/kg
Burning behaviour	Flame-retardant according to UL VW-1; DIN EN 50265-2
Oil resistant	according to UL 4d100C and DIN EN 60811-2-1

Design


- Bare copper wire, superfine strand according to DIN VDE 0295 Kl. 6, IEC 60228 cl. 6
- Special TPE/HGI conductor insulation according to UL
- Conductors black with white number print according to DIN EN 50334
- Ground conductor
G = with greenyellow ground conductor; x = without ground conductor
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over stranded cable
- Jacket special PVC according to UL class 43 and VDE 0207 TM5, Temperature-resistant according to VDE 0207 up to 90 °C
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
109450	3G0.5	5.7	4.4	1.5
109451	4G0.5	6.1	5.3	2.0
109452	5G0.5	6.7	6.2	2.5
109453	7G0.5	7.7	8.3	3.4
109454	12G0.5	9.3	11.6	5.9
109455	18G0.5	10.7	16.2	8.8
109456	25G0.5	12.5	21.8	12.3
1.0 mm²				
109457	3G1.0	6.6	6.6	2.9
109458	4G1.0	7.2	8.1	4.0
109459	5G1.0	7.8	9.5	5.0
109460	7G1.0	9.1	12.4	6.9
109461	12G1.0	10.8	18.9	11.9
109462	18G1.0	12.7	26.7	17.8
109463	25G1.0	15.1	36.3	24.7
109464	34G1.0	16.8	47.5	33.7
109479	41G1.0	18.8	58.4	37.5
1.5 mm²				
109465	3G1.5	7.2	8.6	4.4
109466	4G1.5	7.8	10.6	5.9
109467	5G1.5	8.6	12.6	7.4
109468	7G1.5	10.1	16.6	10.3
109469	12G1.5	12.4	25.8	17.5
109470	18G1.5	14.5	36.7	26.5
109471	25G1.5	16.8	50.1	36.8
2.5 mm²				
109472	4G2.5	9.1	15.9	9.8
109473	5G2.5	10.0	18.9	12.8
109474	7G2.5	12.1	25.3	17.0
4 mm²				
109475	4G4	10.7	23.0	15.5
109476	7G4	14.0	37.7	27.3

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC c-track cables

LÜTZE SUPERFLEX® N ORC

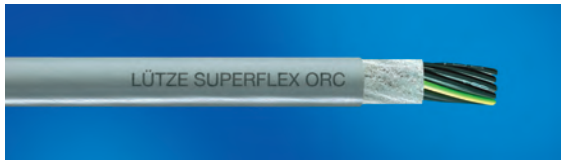

Application

- Machine tools, transfer lines as well as additional areas in the French automobile industry
- In dry and moist rooms
- As control, measurement and regulation cable medium operating conditions
- In energy command chains and everywhere where signals are transmitted to continuously moving system or machine parts
- Approved by the French automobile industry for use in conjunction with cutting and cooling oils

Properties

- Isolation and jacket material especially oil-stabilised according to the French automobile industry norm (CNOMO)
- Through construction and material suitable for continuous movement application
- PVC flame-retardant, self-extinguishing
- Widely resistant to acids and bases
- Free from paint wetting disruptive substances (LABS-free)
- RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
Test voltage	3000 V
Insulation resistance	min. 20 MΩ/km
Temperature range	
moving	-5 °C to +70 °C
fixed	-25 °C to +70 °C
Minimum bending radius	
moving	D × 10
fixed	D × 4
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1

Design


- Bare copper wire, multi-strand according DIN VDE 0295 Kl. 5, IEC 60228 cl. 5
- Special PVC conductor insulation according to CNOMO
- Conductors black with white number print according to DIN EN 50334
- Ground conductor
- G = with greenyellow ground conductor; x = without ground conductor
- Conductors stranded layers
- Jacket special PVC according to CNOMO, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
1.0 mm²				
101165	3G1.0	7.6	7.9	2.8
108022	4G1.0	8.3	10.6	3.8
101164	5G1.0	9.4	13.0	4.8
101209	7G1.0	11.0	15.5	6.7
101167	12G1.0	13.0	25.6	11.5
101210	18G1.0	15.4	42.6	17.2
101211	20G1.0	16.4	45.0	19.2
101166	25G1.0	18.5	54.0	24.0
1.5 mm²				
101212	3G1.5	8.1	11.3	4.3
101229	4G1.5	9.0	12.8	5.7
100933	5G1.5	10.0	16.0	7.2
101213	7G1.5	11.8	20.1	10.0
101228	12G1.5	13.6	31.8	17.3
101015	18G1.5	16.4	50.8	25.9
108036	25G1.5	20.4	67.1	36.0
2.5 mm²				
101238	3G2.5	10.0	17.0	7.2
101227	4G2.5	11.1	21.6	9.6
4 – 10 mm²				
108026	4G4	13.8	30.0	15.4
101256	4G6	17.0	42.0	23.0
108037	4G10	20.6	65.0	38.4

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PUR actuator-sensor cables - c-track suitable

LÜTZE SUPERFLEX® TRONIC AS PUR LÜTZE SUPERFLEX® ASB PUR KOMBI

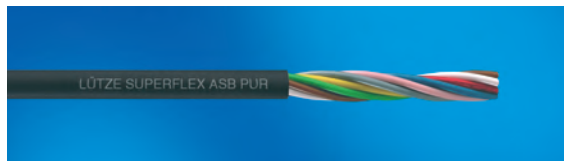

Application

- Machine and device construction, transport and conveyor technology
- Actuator, sensor technology
- Combination cable SUPERFLEX® ASB for actuator box, suitable for drag chains
- Through full PUR jacket, optimally suited for c-tracks, extremely harsh operating conditions and aggressive coolants and lubricants

Properties

- Flame-retardant, self-extinguishing
- Very good alternating bending strength
- Good pressure and roll-over resistance
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene
- Free from silicone paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

UL approval	300 V 80 °C
Rated voltage	300 V
Test voltage	3000 V
Insulation resistance	min. 20 MΩ x km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C

Minimum bending radius

moving	D x 7.5
fixed	D x 4

Fire performance

Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1

Halogen-free

according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design


- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special-TPE conductor insulation
- Conductors colour-coded
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour grey RAL 7001 and black RAL 9005

Part-No.	Number of strands/cross-section/ strand colours	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
LÜTZE SUPERFLEX TRONIC AS PUR jacket grey				
117304	3x0.34 brown, blue, black	4.3	4.0	1.0
117305	4x0.34 brown, blue, black, white	4.5	4.8	1.3
117306	5G0.34 brown, blue, black, white, greenyellow	4.9	6.2	1.6
117307	3G0.5 brown, blue, greenyellow	4.7	5.5	1.5
LÜTZE SUPERFLEX® ASB PUR black jacket				
110870	3G1.0+4x0.34 1.0: brown, blue, greenyellow 0.34: white, green, yellow, grey	7.5	8.5	4.2
110871	3G1.0+6x0.34 1.0: brown, blue, greenyellow 0.34: white, green, yellow, grey, pink, red	7.8	9.1	4.9
110872	3G1.0+8x0.34 1.0: brown, blue, greenyellow 0.34: white, black, green, yellow, grey, pink, violet, red	8.2	9.9	5.5
110873	3G1.0+12x0.34 1.0: brown, blue, greenyellow 0.34: white, green, yellow, grey, pink, violet, red, greypink, redblue, whitegreen, browngreen, white yellow, yellow-brown	8.8	11.3	6.8
110874	3G1.0+16x0.34 1.0: brown, blue, greenyellow 0.34: white, green, yellow, grey, pink, red, black, violet, greypink, redblue, whitegreen, browngreen, whiteyellow, yellowbrown, whitegrey, greybrown	9.7	13.5	8.1
110875	5G1.0 + 4x0.34 1.0: brown, blue, greenyellow 0.34: white, green, yellow, grey	9.1	10.8	4.9
110876	5G1.0 + 6x0.34 1.0: brown, blue, greenyellow 0.34: white, green, yellow, grey, pink, red	9.4	15.5	6.8
110877	5G1.0+ 8x0.34 1.0: brown, blue, greenyellow 0.34: white, green, yellow, grey, pink, red, black, violet	9.8	18.2	7.4
110878	5G1.0 + 12x0.34 1.0: brown, blue, greenyellow 0.34: white, green, yellow, grey, pink, violet, red, greypink, redblue, whitegreen, browngreen, white yellow, yellow-brown	10.5	25.5	8.7

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PUR c-track cables - For best performance

LUTZE-SUPERFLEX[®] TRONIC PUR

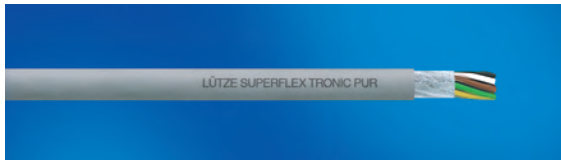

Application

- Robots, drag chain and anywhere where signals are transmitted to continuously moving system or machine parts
- Machine and device construction, transport and conveyor technology, heating, climate technology
- In dry and moist rooms
- As monitoring, measurement and control cable for continuous bending loads with the highest service life requirements

Properties

- Low capacitance, very good electrical properties
- Flame-retardant, self-extinguishing
- halogen-free, no corrosive gases
- Very good alternating bending strength
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene
- Free from paint wetting impairment substances (LABS-free)
- RoHS-compliant

Technical data

UL approval	300 V 80 °C
Rated voltage	300 V
Test voltage	3000 V
Insulation resistance	min. 100 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 10
fixed	D × 4
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1Flame-Test
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1; EN 60684-2

Design

- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special-TPE/HGI conductor insulation
- Conductor labelling Conductors colour-coded according to DIN 47100
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over stranded cable
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
AWG 26 / 0,14 mm²				
117030	2×0.14	3.6	2.1	0.3
117031	3×0.14	3.8	2.3	0.4
117032	4×0.14	4.0	2.8	0.6
117033	5×0.14	4.3	3.2	0.7
117034	7×0.14	5.0	4.7	1.0
117035	10×0.14	5.8	5.5	1.4
117036	12×0.14	5.9	6.0	1.6
117027	15×0.14	6.2	4.9	2.2
117037	18×0.14	6.8	7.8	2.5
117038	25×0.14	8.1	10.4	3.4
AWG 24 / 0,25 mm²				
117039	2×0.25	3.8	3.5	0.5
117040	3×0.25	4.0	3.4	0.7
117041	4×0.25	4.3	4.0	1.0
117042	5×0.25	4.7	4.5	1.2
117043	7×0.25	5.4	5.8	1.7
117044	10×0.25	6.2	7.0	2.4
117045	12×0.25	6.4	7.8	2.9
117028	15×0.25	7.0	6.8	3.8
117046	18×0.25	7.5	10.4	4.3
117047	25×0.25	8.8	13.6	5.9
AWG 22 / 0,34 mm²				
117048	2×0.34	4.0	3.4	0.6
117049	3×0.34	4.2	3.9	1.0
117050	4×0.34	4.5	4.5	1.2
117051	5×0.34	4.9	5.2	1.5
117052	7×0.34	5.7	6.5	2.2
117053	10×0.34	6.6	8.2	3.0
117054	12×0.34	6.7	9.1	3.7
117029	15×0.34	7.5	8.3	5.0
117055	18×0.34	7.5	12.3	5.6
117056	25×0.34	9.3	17.4	7.8

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PUR c-track cables - For best performance

LÜTZE SUPERFLEX® TRONIC (C)PUR



Application

- Drag chain as well as everywhere where signals are transmitted to continuously moving system or machine parts
- Machine and device construction, transport and conveyor technology, heating, climate technology
- In dry and moist rooms
- As monitoring, measurement and control cable for continuous bending loads with the highest service life requirements
- Especially for industrial environments with high interference potential in machine, plant and device construction

Properties

- High active and passive interference resistance
- Braided shield optimised for continuous flexible use
- Low capacitance, very good electrical properties
- Flame-retardant, self-extinguishing
- halogen-free, no corrosive gases
- Very good alternating bending strength
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene
- Free from paint wetting impairment substances (LABS-free)
- RoHS-compliant

Technical data

UL approval	300 V 80 °C
Rated voltage	300 V
Test voltage	3000 V
Insulation resistance	min. 100 MΩ x km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D x 12
fixed	D x 6

Burning behaviour

Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1Flame-Test according to DIN EN 50264-1; EN 50267-2-1; EN 60684-2

Halogen-free

Design

- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special-TPE conductor insulation
- Conductor labelling Conductors colour-coded according to DIN 47100
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over stranded cable
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.14 mm²				
117090	(2x0.14)	4.0	2.3	1.1
117091	(3x0.14)	4.3	2.5	1.3
117092	(4x0.14)	4.5	2.9	1.5
117093	(5x0.14)	4.7	3.2	1.7
117094	(7x0.14)	5.4	4.1	2.2
117095	(10x0.14)	6.2	5.0	2.8
117096	(12x0.14)	6.4	5.5	3.1
117097	(18x0.14)	7.3	7.2	4.3
117098	(25x0.14)	8.7	9.5	5.6
0.25 mm²				
117099	(2x0.25)	4.3	2.7	1.3
117100	(3x0.25)	4.5	3.0	1.7
117101	(4x0.25)	4.9	3.5	2.0
117102	(5x0.25)	5.1	4.0	2.3
117103	(7x0.25)	5.9	5.0	3.1
117104	(10x0.25)	6.7	6.4	4.1
117105	(12x0.25)	7.2	7.1	4.7
117106	(18x0.25)	8.2	9.5	6.4
117107	(25x0.25)	9.4	12.8	8.5
0.34 mm²				
117108	(2x0.34)	4.5	3.0	1.6
117109	(3x0.34)	4.7	3.4	2.0
117110	(4x0.34)	5.1	4.0	2.4
117111	(5x0.34)	5.4	4.6	2.8
117112	(7x0.34)	6.2	5.8	3.7
117113	(10x0.34)	7.0	7.5	5.0
117114	(12x0.34)	7.3	8.4	5.7
117115	(18x0.34)	8.5	11.5	8.0
117116	(25x0.34)	9.6	16.0	11.5

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PUR c-track cables - For best performance

LÜTZE SUPERFLEX[®] TRONIC (C)PUR TP



Application

- Robots, drag chain and anywhere where signals are transmitted to continuously moving system or machine parts
- Machine and device construction, transport and conveyor technology, heating, climate technology
- In dry and moist rooms
- As monitoring, measurement and control cable for continuous bending loads with the highest service life requirements
- Especially for industrial environments with high interference potential in machine, plant and device construction

Properties

- High active and passive interference resistance
- High crosstalk attenuation through paired stranding
- Braided shield optimised for continuous flexible use
- Low capacitance, very good electrical properties
- Flame-retardant, self-extinguishing
- Halogen-free, no corrosive gases
- Very good alternating bending strength
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene
- Free from paint wetting impairment substances (LABS-free)
- RoHS-compliant

Technical data

UL approval	300 V 80 °C
Rated voltage	300 V
Test voltage	3000 V
Insulation resistance	min. 100 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1; EN 60684-2

Design

- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special-TPE conductor insulation
- Conductor labelling Conductors colour-coded according to DIN 47100
- Zero-potential paired stranding, layer pitch optimised
- Non-woven material over stranded cable
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.25 mm²				
117170	(2x2x0.25)	6.3	8.2	2.2
117171	(3x2x0.25)	6.6	9.1	2.8
117172	(4x2x0.25)	7.1	10.3	3.4
117173	(5x2x0.25)	7.5	11.7	4.0
117177	(6x2x0.25)	8.1	13.1	4.7
117174	(8x2x0.25)	9.4	16.0	6.0
117175	(10x2x0.25)	10.5	19.1	7.9
117176	(12x2x0.25)	10.8	20.7	9.1
0.34 mm²				
117180	(2x2x0.34)	6.6	9.2	2.6
117181	(3x2x0.34)	6.9	10.2	3.4
117182	(4x2x0.34)	7.4	11.7	4.2
117183	(5x2x0.34)	8.0	13.3	5.1
117184	(6x2x0.34)	8.6	15.0	5.9
117185	(8x2x0.34)	10.0	19.2	8.3
117186	(10x2x0.34)	10.8	22.1	10.0
117187	(12x2x0.34)	11.1	24.1	11.4
0.5 mm²				
117190	(2x2x0.5)	7.3	10.9	3.4
117191	(3x2x0.5)	7.7	12.3	4.5
117303	(4x2x0.5)	8.2	14.2	5.7
117192	(5x2x0.5)	9.1	16.3	6.9
117193	(6x2x0.5)	9.9	18.4	8.0
117194	(8x2x0.5)	11.2	23.8	11.2
117195	(10x2x0.5)	12.4	27.5	13.5
117196	(12x2x0.5)	13.0	30.2	15.6
0.75 mm²				
117199	(2x2x0.75)	8.5	14.3	4.7
117201	(3x2x0.75)	9.0	16.2	6.3
117202	(4x2x0.75)	9.7	18.9	8.0
117203	(5x2x0.75)	10.8	22.7	10.5
117204	(6x2x0.75)	11.7	25.9	12.3
117205	(8x2x0.75)	13.5	32.0	16.0
117206	(10x2x0.75)	14.7	37.3	19.3
117207	(12x2x0.75)	15.2	42.1	23.1

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC c-track cables

LÜTZE SUPERFLEX® TRONIC



Application

- Drag chain as well as anywhere where signals are transmitted to continuously moving system or machine parts
- As control, measurement and regulation cable medium operating conditions without tensile loading

Properties

- Minimal cable diameter through thin-walled PVC semi-rigid conductor insulation according to UL
- Especially suitable for cost-efficient IDC-connection (Insulation Displacement Connection)
- Outer jacket special-PVC Class 43 according to UL
- Very good oil resistance
- Widely resistant to acid and bases (see tech. information)
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

UL approval	300 V 80 °C
Rated voltage	300 V
Insulation resistance	min. 20 MΩ × km
Temperature range according to UL	
continuously moving	-5 °C to +80 °C
fixed	-25 °C to +80 °C
Cold flexibility	according to UL up to -25 °C
Minimum bending radius	
moving	D × 10
fixed	D × 4
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1Flame-Test; CSA FT 1
Oil resistant	according to UL 4d100C and DIN EN 60811-2-1

Design


- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special PVC semi-rigid conductor insulation according to UL, temperature-resistant according to VDE 0207 up to 105 °C
- Conductors colour-coded according to DIN 47100
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over stranded cable
- Jacket special PVC according to UL class 43 and VDE 0207 TM5, Temperature-resistant according to VDE 0207 up to 90 °C
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.14 mm²				
117000	2×0.14	4.1	2.1	0.3
117001	3×0.14	4.2	2.3	0.5
117003	5×0.14	4.8	3.1	0.7
117004	7×0.14	5.4	3.8	1.0
117005	10×0.14	6.1	4.8	1.5
117006	12×0.14	6.3	5.3	1.8
117007	18×0.14	7.2	7.2	2.6
117008	25×0.14	8.4	9.5	3.6
0.25 mm²				
117009	2×0.25	4.3	2.5	0.5
117010	3×0.25	4.5	2.8	0.7
117012	5×0.25	5.1	3.8	1.2
117013	7×0.25	5.8	4.8	1.7
117014	10×0.25	6.7	6.2	2.5
117015	12×0.25	6.8	6.9	2.9
117016	18×0.25	7.8	9.4	4.4
117017	25×0.25	9.9	12.6	6.3
0.34 mm²				
117018	2×0.34	4.5	2.8	0.6
117019	3×0.34	4.7	3.2	1.0
117021	5×0.34	5.3	4.4	1.6
117022	7×0.34	6.1	5.6	2.2
117023	10×0.34	7.0	7.3	3.2
117024	12×0.34	7.2	8.2	3.9
117025	18×0.34	8.3	11.4	5.8
117026	25×0.34	9.7	15.2	8.4

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC c-track cables

LÜTZE SUPERFLEX[®] TRONIC (C)Y LÜTZE SUPERFLEX[®] TRONIC (C)Y TP

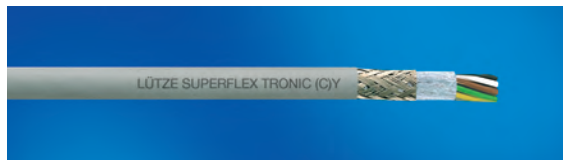

Application

- Drag chain as well as anywhere where signals are transmitted to continuously moving system or machine parts.
- As control, measurement and regulation cable medium operating conditions without tensile loading
- Especially for industrial environment with high interference potential, in machine, plant and device construction.

Properties

- Minimal cable diameter through thin-walled PVC semi-rigid conductor insulation according to UL
- Especially suitable for cost-efficient IDC-connection (Insulation Displacement Connection)
- High active and passive interference resistance
- Braided shield optimised for continuous flexible use
- Outer jacket special PVC class 43 according to UL
- Very good oil resistance
- Widely resistant to acids and bases (see tech. information)
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

UL approval	300 V 80 °C
Rated voltage	300 V
Test voltage	3000 V
Insulation resistance	min. 20 MΩ × km
Temperature range according to UL	
continuously moving	-5 °C to +80 °C
fixed	-25 °C to +80 °C
Cold flexibility	according to UL up to -25 °C
Minimum bending radius	
moving	D × 12
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1
Oil resistant	according to UL 4d100C and DIN EN 60811-2-1

Design

- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special PVC semi-rigid conductor insulation according to UL, temperature-resistant according to VDE 0207 up to 105 °C
- Conductors colour-coded according to DIN 47100
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over stranded cable
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Jacket special PVC according to UL class 43 and VDE 0207 TM5, Temperature-resistant according to VDE 0207 up to 90 °C
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.14 mm²				
117060	(2×0.14)	4.7	3.1	1.1
117061	(3×0.14)	4.8	3.3	1.2
117062	(4×0.14)	4.9	3.9	1.4
117063	(5×0.14)	5.4	4.2	1.7
117064	(7×0.14)	6.0	5.0	2.2
117065	(10×0.14)	6.7	6.2	2.8
117066	(12×0.14)	6.9	6.7	3.1
117067	(18×0.14)	7.8	8.8	4.2
117068	(25×0.14)	9.2	11.4	5.6
0.25 mm²				
117069	(2×0.25)	4.9	3.4	1.3
117070	(3×0.25)	5.1	3.8	1.7
117072	(5×0.25)	5.5	4.9	2.3
117073	(7×0.25)	6.3	6.1	3.0
117074	(10×0.25)	7.1	7.6	4.7
117075	(12×0.25)	7.2	8.4	4.5
117076	(18×0.25)	8.2	11.2	6.3
117077	(25×0.25)	9.9	14.6	9.3
0.34 mm²				
117078	(2×0.34)	5.1	3.8	1.6
117079	(3×0.34)	5.3	4.2	2.0
117081	(5×0.34)	5.8	5.6	2.8
117082	(7×0.34)	6.7	6.9	3.7
117083	(10×0.34)	7.6	8.9	5.0
117084	(12×0.34)	7.7	9.8	5.7
117085	(18×0.34)	8.9	13.2	8.0
117086	(25×0.34)	10.4	18.4	11.5
0.25 mm² Design with paired stranding				
117130	(2×2×0.25)	6.3	6.1	2.3
117131	(3×2×0.25)	6.5	7.2	2.8
117136	(4×2×0.25)	7.2	8.3	3.5
117133	(5×2×0.25)	7.7	10.3	4.2
117139	(6×2×0.25)	8.7	11.1	4.8
117134	(8×2×0.25)	9.6	12.4	6.2
117135	(10×2×0.25)	10.5	18.5	8.2

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

Selection of chains and cables – installation in C-tracks



Selection of chains and cables

- Only cables that are suitable for use in c-tracks may be used
- The installation in the C-track requires extreme care and should occur with minimal strain on the cable
- The weight distribution in the chain should be as symmetrical as possible, the heavier cables should be placed outwards
- C-track and cables are a system which only function optimally when c-track and cables are matched to each other
- In principle, the essential parameters of the system to be supplied are determined, e.g. bending radius, speed, acceleration and traverse path are normally fixed sizes
- Through a larger chain, free spaces can be increased
- A cable with a high strand count can possibly be distributed over two cables with lower strand counts (this applies in particular to cables with 25 or more strands)

In general the following is valid:

- The smaller the bending radius
 - The longer the traverse path
 - The greater the speed and acceleration
 - The higher the number of wires in the cable
 - The smaller the free space of the cable
- the greater the strain on the cable

- A larger bending radius than the specified minimum bending radius increases the expected service life significantly

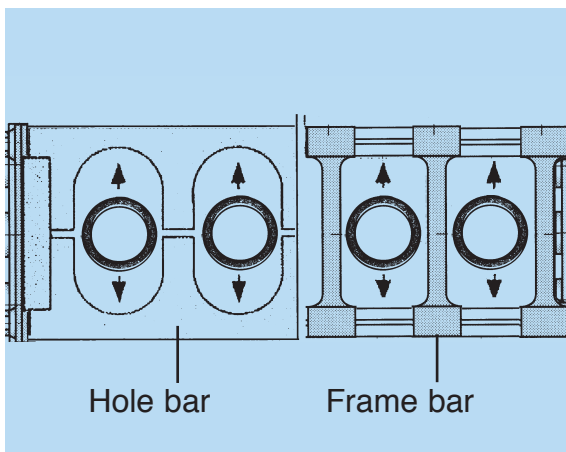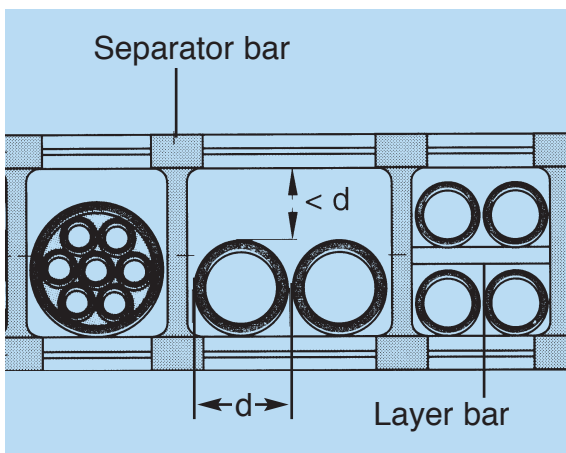


Sectioning of the C-track

- The running of every cable in a separate chamber is advantageous
- Do not run cables on top of one another, absolutely use separating bars
- If running multiple cables in one chamber is unavoidable, the remaining free space must be smaller than the smallest cable diameter; this is the only way to prevent the mutual entwining of the cables
- The cables must be able to move freely, they may not be fixed in the C-track nor bundled together
- For multilayered run flat cables, layer bars must strictly be used
- Required free space
(Minimum values)


Width	$\geq 10\%$ of the cable diameter
Height	$\geq 15\%$ of the cable diameter
- With increasing traverse path, the vertical free space must be clearly increased (up to 100%), a multilayered running is therefore not recommended for long traverse paths
- Pressure hoses must always lie in separate chambers since these can greatly shorten or lengthen with pressure change. Cables run in the same chamber can thus become clamped.

Selection of chains and cables – Installation in C-tracks

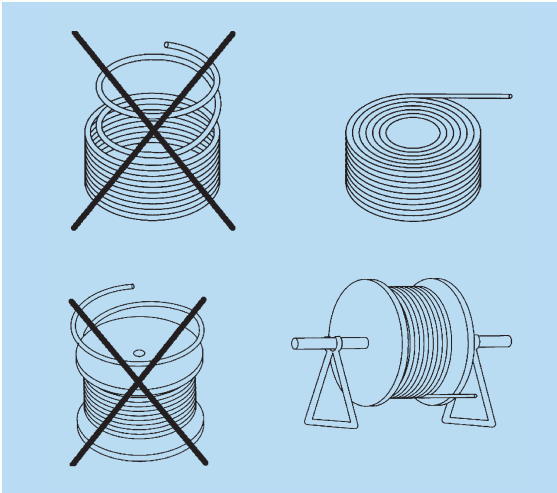


Inserting the cables in the chain

- The cables must be unwound twist free (tangential) from the drum or ring
- It is advantageous to leave the cables stretched out for up to 24 hours to compensate for the possibly existing tension
- When running the cables in the chain, observe that the cables do not become twisted, pulled strongly or even kinked
- If a pulling line is used, the attachment must be made to all elements of the cable, it damages the cable if only e.g. conductor or jacket is attached or pulled

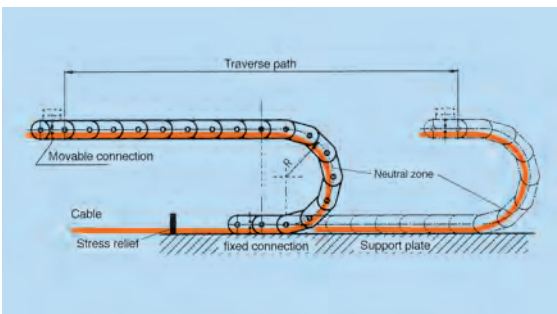


- The cables must run through the bending radius in the neutral zone
- Free space must always be present above and below
- The cables may never be clamped to the inner bars or tied in bundles to the outer bars. This applies in particular to multilayer utilizations

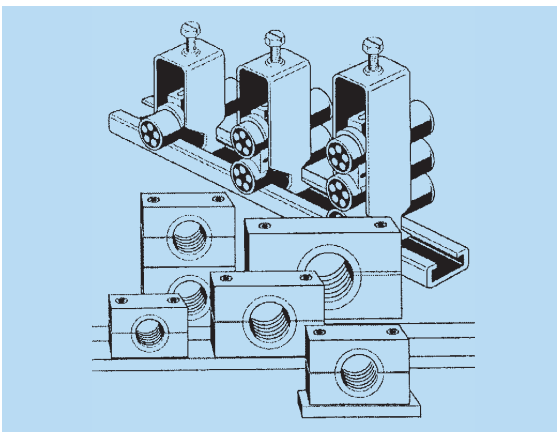

- For short C-tracks, the cables are attached at the fixed point and at the driving dog
- For longer traverse paths, the cables are only relieved of tension at the driving dog
- For vertical power track chains, both ends must be relieved of tension
- In general, it is to be observed that the fixation occurs on a large area so that the cable is fixed, but that individual wires in the cable are not clamped
- **Cable ties within the C-track are never permitted**
- On moving and firm chain ends, the cables may only be first fixed after the relaxation zone.

Relaxation zone (distance radius end - strain relief)

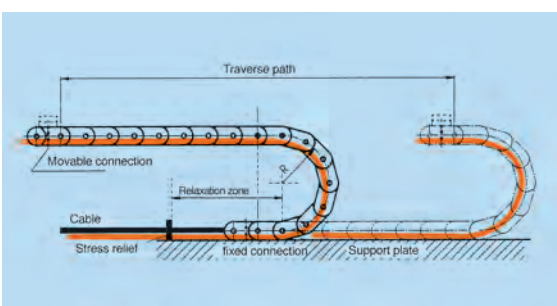

- The length of the relaxation zone must be \geq factor 50 x to the largest cable diameter
- After completion of the installation, the free space over the entire traverse path must be checked
- If necessary, the cable lengths must be corrected
- The cable must be marked at the endpoints so that it can be determined at later checks or corrections if the cable has shifted or if it works successfully.
- After 500-1,000 cycles, the free space in the chain bending must be checked again and possibly corrected. This check must be carried out both after the push movement as well as after the pull movement.

Long-term durability C-track cables LÜTZE SUPERFLEX®

We don't accept production downtimes

Continuously moving machines and system parts are subject to extreme operating conditions.

Normal control cables are no longer up to the increased requirements for permanent operation with high cycle times or high traversing speeds. The result is something that a competitive company can hardly afford: Malfunctions and failure of power supply and signal transmission, machine standstill and finally production downtimes.

For over 25 years, we have been leading in the development and manufacture of flexible cables that meet the challenge of continuous bending stresses.

With LÜTZE SUPERFLEX®, we have developed a control cable program that stands out through its exceptional resilience and is thus created for extreme operating conditions – like e.g. in C-tracks. Through the special cable construction and conductor insulation which causes no resistance to sliding, the cables have complete freedom of movement and can compensate for stresses and strains that occur. This ensures good flexibility and the greatest possible protection from wire breaks.

Our LÜTZE SUPERFLEX® cables are in constant use on an international scale and prove that they are robust and fulfil the highest requirements. They are flexible, versatile and reliable.

Flexible:

With small bending radii, high travel distances as well as fast speeds and accelerations, LÜTZE SUPERFLEX® cables are excellent for constantly moving applications.

Versatile:

The wide range of material with various characteristics, stability properties and approvals allow customers to find the optimum LÜTZE SUPERFLEX® cable for each application.

Reliable:

LÜTZE SUPERFLEX® cables have been tried and tested in thousands of systems over the last 25 years. Fatigue tests conducted by well-known users were completed after more than 11 million cycles without any interruptions.

LÜTZE SUPERFLEX® cables are designed in their construction, choice of material and production technique for the highest requirements in energy supply systems. The expected requirements are:

Type	Traverse path (m)	Bending radius = Factor x cable Ø (mm)	Speed (m/s)	Acceleration (m/S ²)	Bending cycles (approx. mio)
LÜTZE SUPERFLEX® PLUS N PUR	≤ 100	≥ 7,0 x Ø	≤ 5	≤ 10	2
	≤ 20	≥ 7,0 x Ø	≤ 5	≤ 10	10
	≤ 5	≥ 10 x Ø	≤ 3	≤ 5	20
LÜTZE SUPERFLEX® PLUS N(C) PUR	≤ 100	≥ 10 x Ø	≤ 5	≤ 10	2
	≤ 20	≥ 10 x Ø	≤ 5	≤ 10	10
	≤ 5	≥ 12 x Ø	≤ 3	≤ 5	20
LÜTZE SUPERFLEX® PLUS N(C) PUR Motor/Servo ≥ 4 mm ²	≤ 40	≥ 10 x Ø	≤ 3,5	≤ 5	5
LÜTZE SUPERFLEX® PLUS N(C) PUR Motor (inner Jacket)	≤ 100	≥ 10 x Ø	≤ 3,5	≤ 5	5
LÜTZE SUPERFLEX® N PUR	≤ 40	≥ 10 x Ø	≤ 4	≤ 5	3
	≤ 20	≥ 10 x Ø	≤ 4	≤ 5	5
LÜTZE SUPERFLEX® N(C) PUR	≤ 40	≥ 12 x Ø	≤ 4	≤ 5	3
	≤ 20	≥ 12 x Ø	≤ 4	≤ 5	5
LÜTZE SUPERFLEX® TPE	≤ 40	≥ 10 x Ø	≤ 4	≤ 5	3
	≤ 20	≥ 10 x Ø	≤ 4	≤ 5	5
LÜTZE SUPERFLEX® (C)TPE	≤ 40	≥ 12 x Ø	≤ 4	≤ 5	3
	≤ 20	≥ 12 x Ø	≤ 4	≤ 5	5
LÜTZE SUPERFLEX® N	≤ 15	≥ 10 x Ø	≤ 5	≤ 10	5
	≤ 5	≥ 12 x Ø	≤ 3	≤ 5	10
LÜTZE SUPERFLEX® N (C) Y	≤ 15	≥ 12 x Ø	≤ 5	≤ 10	5
	≤ 5	≥ 15 x Ø	≤ 3	≤ 5	10
LÜTZE SUPERFLEX® TRONIC (C) PUR	≤ 20	≥ 12 x Ø	≤ 5	≤ 10	5
LÜTZE SUPERFLEX® TRONIC (C) PUR TP	≤ 20	≥ 12 x Ø	≤ 5	≤ 10	5
LÜTZE SUPERFLEX® BUS PUR	≤ 15	≥ 12 x Ø	≤ 3	≤ 5	3
LÜTZE SUPERFLEX® BUS (C)Y	≤ 10	≥ 15 x Ø	≤ 3	≤ 5	2

Prerequisites for fulfilling these values are the optimal chain selection and proper, careful installation, see mounting guidelines.

The specified values are permissible limit loads, a larger bending radius and smaller number of cables in particular have a positive influence on the expected service life. The specification of minimum bending radius for cables is based on the use at normal temperatures.

Depending on application case, the specified standard values can be exceeded. Please consult with us in this case.

3. Servo cables



Servo cables · Overview



No. 1



No. 2



No. 3



No. 4



No. 5



No. 6



No. 7



No. 8



No. 9

Product	Construction						Characteristics						Application/usage					Approvals					Page	No.	
	Isolation	Labelling	Inner jacket	Shield	Outer jacket	Cross-sectional area	Oil resistant	Abrasion-proof	Flexible	Chemical resistant	Halogen free	Nominal voltage (V)	Application	Flexible	Continuous use with compulsory guide	Torsion	Mechanical conditions	Temperature range °C	UL/CSA recognized	UL listed	VDE/HAR	FDA			CNOMO
LÜTZE SUPERFLEX® PLUS M (C) PUR 0,6/1 KV	TPE	No.	(TPE)	●	PUR	1,0-50	●	●	●	●	●	0,6/1	Motor cable	●	●	-	very high	-25 +80	●					3.4	1
LÜTZE SUPERFLEX® PLUS M (C) PUR Servo 0,6/1 KV	TPE	coloured/ No.	-	●	PUR	1,0-50	●	●	●	●	●	0,6/1	Motor Brake	●	●	-	very high	-25 +80	●					3.5	2
LÜTZE SUPERFLEX® PLUS M PUR 0,6/1 KV	TPE	No.	-	-	PUR	1,5-50	●	●	●	●	●	0,6/1	Motor	●	●	○	high	-25 +80	●					3.6	3
LÜTZE SUPERFLEX® PLUS M PUR 0,6/1 KV	TPE	-	-	○	PUR	4-120	●	●	●	●	●	0,6/1	Performance-cable	●	●	-	high	-25 +80	●					3.7	4
LÜTZE SUPERFLEX® PLUS (C) PUR Servo UL	TPE	coloured	-	●	PUR	div.	●	●	●	●	●	300	Signal cable	●	●	-	very high	-25 +80	●					3.8-3.10	5
LÜTZE-SILFLEX® M(C) PUR Servo 0,6 KV	TPE	coloured/ No.	-	●	PUR	1,5-35	●	●	●	●	●	0,6/1	Motor cable	●	-	-	low	-25 +80						3.11	6
LÜTZE-SILFLEX® M(C) Y Servo	PVC	coloured/ No. (PVC)	●	●	PVC	1,5-35	○					0,6/1	Motor cable	●	-	-	low	-25 +80						3.12	7
LÜTZE-SILFLEX® (C) PUR Servo	PVC	coloured	-	●	PUR	div.	●	●	●	●	●	300	Signal cable	●	-	-	low	-5 +80						3.13	8
LÜTZE SILFLEX® (C) Y Servo	PVC	coloured	●	●	PVC	div.	○					300	Signal cable	●	-	-	low	-5 +70						3.13	9

● = suitable
○ = conditionally suitable

Notes

PUR c-track cables - For best performance

LÜTZE SUPERFLEX® PLUS M (C) PUR 0.6/1kV Motor/Power supply cable



Application

- Motor connection cable, especially for frequency converters and SERVO drives
- Through full PUR jacket and TPE / HGI cable insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- For travel paths over 40 m, we recommend conductors with inside jacket

Properties

- High active and passive interference resistance (EMC)
- Braided shield optimised for continuous flexible use
- Very good alternating bending strength
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene (see tech. information)
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

UL approval	1000 V 80 °C
Voltage	
U ₀ /U	0.6/1 kV
Test voltage	4000 V
Insulation resistance	min. 500 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 10
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2 DIN EN 50265-2; IEC 60332-1; UL 1581 section 1080 VW-1; CSA FT 1
Halogen-free	according to DIN EN 202641-1, EN 50267-2-1, EN 60684-2

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 or IEC 60228
- Special TPE/HGI conductor insulation, UL qualified
- Conductor labelling Power conductors black with number print U/L1/C/L+; V/L2; W/L3/D/L-
- Ground conductor greenyellow according to DIN EN 50334
G = with greenyellow ground conductor; x = without ground conductor
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over stranded cable
- Inside jacket TPE (optional)
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour orange RAL 2003

Part-No.	Number of strands/cross-section	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
Design without inside jacket				
111496	(4G1.0)	9.5	12.2	6.5
111460	(4G1.5)	8.0	11.7	7.7
111461	(4G2.5)	9.6	17.3	12.0
111462	(4G4)	11.1	24.5	18.8
111463	(4G6)	13.4	36.5	29.0
111464	(4G10)	16.7	54.9	45.1
111465	(4G16)	20.4	84.9	71.1
111466	(4G25)	25.0	129.9	110.0
111467	(4G35)	28.3	169.2	151.0
111468	(4G50)	33.3	244.2	213.0
Design with inside jacket				
111480	(4G1.5)	10.0	16.0	8.3
111481	(4G2.5)	11.7	22.1	12.6
111482	(4G4)	13.3	32.1	20.2
111483	(4G6)	15.3	41.2	27.0
111484	(4G10)	17.9	62.8	45.5
111485	(4G16)	21.7	97.8	71.5
111486	(4G25)	26.3	144.5	109.3
111487	(4G35)	31.0	200.4	149.8

CE These products are in conformity to the EC Low Voltage Directive 73/23/EWG or 93/68/EWG respectively

PUR c-track cables - For best performance

LÜTZE SUPERFLEX® PLUS M (C) PUR SERVO 0.6/1kV Supply Line Motor/Brake



Application

- Termination cable motor/brake especially for frequency converters and SERVO drives in machine and plant construction, transport and conveyor technology
- Through full PUR jacket and TPE / HGI cable insulation optimally suited for c-tracks, extremely harsh operating conditions and aggressive coolants and lubricants
- Especially for industrial environments, machines and plants

Properties

- High active and passive interference resistance (EMC)
- Braided shield optimised for flexible use
- Very good alternating bending strength
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene (see tech. information)
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

UL approval	1000 V 80 °C
Voltage	
VDE U ₀ /U	0.6/1 kV
Test voltage	4000 V
Insulation resistance	min. 500 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 10
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; IEC 60332-1; UL 1581 section 1080 VW-1; CSA FT 1
Halogen-free	according to DIN EN 202641-1, EN 50267-2-1, EN 60684-2

Design

- Bare copper wire, superfine strand according to DIN VDE 0295 Kl. 6 or IEC 60228 cl. 6
- Special TPE/HGI conductor insulation, UL qualified
- Power conductors black with number print U/L1/C/L+; V/L2; W/L3/D/L-
- Ground conductor greenyellow according to DIN EN 50334 G = with greenyellow ground conductor; x = without ground conductor
- Control pair(s) (black; white) or (5,6) (7,8)
Control quads: (black; white; red; yellow)
Three-way element: Number print (1, 2, 3)
Control pair(s)/Control quads with braided shield and foil banding
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over stranded cable
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour Orange RAL 2003; Petrol RAL 5018

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
Design with control pair				
111439	(4G1.0 + (2×0.5))	9.4	15.5	8.1
111469	(4G1.0+(2×0.75))	9.6	14.5	9.3
111420	(4G1.5+(2×1.5))	10.5	21.0	13.5
111421	(4G2.5+(2×1.5))	12.1	23.5	18.9
111422	(4G4+(2×1.5))	13.6	32.0	26.2
111423	(4G6+(2×1.5))	15.5	43.0	34.3
111424	(4G10+(2×1.5))	18.4	68.0	55.0
111425	(4G16+(2×1.5))	21.4	86.0	83.1
111426	(4G25+(2×1.5))	25.8	136.5	125.5
111427	(4G35+(2×1.5))	30.0	274.6	173.7
111428	(4G50+(2×1.5))	33.3	373.7	246.6
Without UL approval, jacket colour petrol RAL 5018				
111400	(4G1.5 + (2×1.0))	10.2	16.0	12.4
111401	(4G2.5 + (2×1.0))	11.4	21.1	18.4
111402	(4G4.0 + (2×1.0))	12.9	28.8	25.1
Design with two control pairs				
111270	(4G1.0+2x(2x0.75)StC)	11.6	23.2	14.0
111271	(4G1.5+2x(2x0.75)StC)	12.5	25.5	16.2
111272	(4G2.5+2x(2x0.75)StC)	13.5	31.9	21.5
111279	(4Gx2.5+2x(2x1.0)StC)	13.7	33.0	23.0
111273	(4G4+2x(2x1.0)StC)	15.6	41.1	28.8
111280	(4G4+2x(2x1.5)StC)	16.0	45.4	33.8
111274	(4G6+2x(2x1.0)StC)	16.4	51.2	36.8
111281	(4G6+2x(2x1.5)StC)	17.9	54.0	39.5
111275	(4G10+2x(2x1.0)StC)	19.3	73.0	56.9
111282	(4G10+2x(2x1.5)StC)	19.8	73.5	59.5
111276	(4G16+2x(2x1.5)StC)	23.2	106.4	82.3
111277	(4G25+2x(2x1.5)StC)	29.4	171.4	119.2
111278	(4G35+2x(2x1.5)StC)	32.0	217.6	158.8
Design with four-way element for linear drives, with inside jacket				
111530	(4G1.5+(4x0.5))	12.0	23.8	13.1
111531	(4G2.5+(4x0.5))	13.5	28.9	17.4
111532	(4G4+(4x0.5))	15.3	40.9	25.5
111533	(4G6+(4x0.5))	16.9	52.0	33.5
111534	(4G10+(4x0.5))	19.9	73.9	50.8
111535	(4G16+(4x0.5))	22.3	100.9	74.9
Design with three-way element, with inside jacket				
111560	(4G1.5+(3x1.0))	12.3	24.4	13.9
111561	(4G2.5+(3x1.0))	13.7	30.6	18.3
111562	(4G4+(3x1.0))	15.3	39.6	25.6
111563	(4G6+(3x1.5))	17.4	52.9	34.4
111564	(4G10+(3x1.5))	20.5	73.0	52.2

CE These products are in conformity to the EC Low Voltage Directive 73/23/EWG or 93/68/EWG respectively

PUR c-track cables - For best performance

LÜTZE SUPERFLEX® PLUS M PUR 0.6/1 kV Motor/Power supply cable



Application

- Motor connection cable, specifically for machine and device construction, transport and conveyor technology
- Through full PUR jacket and TPE / HGI conductor insulation optimally suited for c-tracks, extremely harsh operating conditions and aggressive coolants and lubricants
- Especially for industrial environments, machines and plants

Properties

- Very good alternating bending strength
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene (see tech. information)
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

UL approval	1000 V 80 °C
Voltage	
U_0/U	0.6/1 kV
Test voltage	4000 V
Insulation resistance	min. 500 MΩ x km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D x 7.5
fixed	D x 4
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section 1080 VW-1; CSA FT 1
Halogen-free	according to DIN EN 202641-1, EN 50267-2-1, EN 60684-2

Design

- Bare copper wire, superfine strand according to DIN VDE 0295 Kl. 6 or IEC 60228 cl. 6
- Special TPE/HGI conductor insulation, UL qualified
- Conductors black with white imprint
- Ground conductor greenyellow according to DIN EN 50334
G = with greenyellow ground conductor; x = without ground conductor
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over stranded cable
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour black RAL 9005

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
111370	4G1.5	7.7	12.1	5.8
111371	4G2.5	9.3	14.3	9.6
111372	4G4	10.8	23.3	15.4
111373	4G6	12.9	32.8	23.1
111374	4G10	15.5	52.5	38.4
111375	4G16	18.8	99.0	61.4
111376	4G25	23.7	120.0	96.0
111377	4G35	27.0	185.0	134.4
111378	4G50	31.8	245.0	192.0
111545	5G4	12.1	28.5	19.4
111430	5G6	14.5	40.0	28.9
111429	5G10	18.2	75.0	49.0
111548	5G16	20.8	116.6	76.8
111549	5G25	26.3	148.0	121.0

CE These products are in conformity to the EC Low Voltage Directive 73/23/EWG or 93/68/EWG respectively

PUR c-track cables - For best performance

LÜTZE SUPERFLEX® PLUS PUR 0.6/1kV LÜTZE SUPERFLEX® PLUS (C) PUR 0.6/1kV Motor/Power supply cable



Application

- Performance cable, specifically for machine and device construction for transport and conveyor technology
- As motor supply or ground conductor
- Through full PUR jacket and TPE cable insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments, machines and plants

Properties

- Flame-retardant, self-extinguishing
- halogen-free, no corrosive gases
- Very good alternating bending strength
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

UL approval	1000 V 80 °C
Voltage	
U ₀ /U	0.6/1 kV
Test voltage	4000 V
Insulation resistance	min. 200 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 7.5
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section 1080 VW-1; CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special TPE conductor insulation, UL qualified
- Meshwork shielding (optional) from galvanised Cu wire, optical covering ≥ 85 %
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour black RAL 9005; green/yellow upon request

Part-No.	Number of strands/cross-section/ strand colours	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
Without shield, black				
111135	1×4	6.4	6.6	3.7
111136	1×6	7.1	9.0	5.6
111126	1×10	8.4	13.8	9.3
111127	1×16	9.8	20.5	14.8
111128	1×25	11.4	30.6	23.3
111129	1×35	13.4	43.1	32.6
111130	1×50	15.2	57.2	47.8
111131	1×70	16.6	78.3	64.5
111132	1×95	19.2	104.3	88.8
111133	1×120	22.2	130.2	120.0
Without screen, insulation and jacket green/yellow				
111242	1G4	6.4	6.6	3.7
111241	1G6	7.1	9.0	5.6
111243	1G10	8.4	13.8	9.3
111197	1G16	9.8	20.5	14.8
111337	1G25	11.4	30.6	23.3
111285	1G35	13.4	43.1	32.6
With CU shield, black				
111287	(1×4)	7.0	8.6	5.5
111288	(1×6)	7.7	11.5	7.7
111289	(1×10)	9.0	17.1	12.1
111290	(1×16)	10.4	24.1	18.1
111291	(1×25)	12.0	35.3	27.3
111292	(1×35)	14.0	48.1	37.3
111293	(1×50)	15.8	63.1	53.1
111294	(1×70)	17.4	85.3	70.6
111295	(1×95)	20.2	114.6	98.0
111296	(1×120)	23.4	143.1	132.0

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PUR encoder cables, c-track suitable - For best performance

LÜTZE SUPERFLEX® PLUS (C) PUR SERVO Feedback cables cULus



Application

- Incremental encoder cable, termination cable for tacho sensor, brake sensor, speed sensor
- Through full PUR jacket and TPE cable insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments, machines and plants

Properties

- High active and passive interference-resistance (EMC)
- Braided shield optimised for continuous flexible use
- Very good alternating bending strength
- Low adhesion, abrasion-proof, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good industrial- and salt water resistance
- Excellent coolant and lubricant resistance
- Widely resistant to oils, greases, alcohol-free benzines and kerosene (see tech. information)
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

UL approval	30 V 80°C / 300 V 80°C
Rated voltage	300 V
Test voltage	2000 V for UL 300 V 500 V for UL 30 V
Insulation resistance	min. 200 MΩ x km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D x 12
fixed	D x 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 20265-2; IEC 60332-1; UL 1581 section 1080 VW-1; CSA FT 1
Halogen-free	according to DIN EN 50264-1, EN 50267-2-1 and EN 60684-2

Design

- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special TPE conductor insulation, UL qualified
- Conductors colour-coded for specific system
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over stranded cable
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour green RAL 6018 or orange RAL 2003 or black RAL 9005

Part-No.	Number of strands/cross-section/ strand colours	cULus	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
For Heidenhain system, black jacket					
111476	(4x0.5+4x2x0.14+(4x0.14)StC) 0.5: white, blue, browngreen, whitegreen 4x2x0.14: yellow/violet, green/pink, brown/ green, red/black (4x0.14): greenblack, blueblack, yellowblack, redblack	30 V	8.0	12.3	6.1
111478	(4x0.5+4x2x0.14) 0.5: white, blue, browngreen, whitegreen 0.14: yellow/violet, grey/pink, brown/green, red/black	30 V	8.0	9.0	4.9
For Indramat system, orange jacket					
110941	(2x1.0+4x2x0.25) 0.5: white, brown 0.25: brown/green, grey/pink, blue/violet, red/ black	300 V	8.3	10.0	6.3
110940	(9x0.5) Strand colour according to DIN 47100	300 V	8.8	12.5	6.0
111139	(2x0.5+10x0.14) 0.5: white, brown 0.14: white, brown, green, yellow, grey, pink, blue, red, black, violet	300 V	6.9	7.0	4.2
111495	(4x1.0+4x2x0.14+(4x0.14)) 1.0: blue, whitegreen, browngreen, white 0.14: grey/pink, yellow/violet, green/brown, red/black 0.14: greenblack, blueblack, yellowblack, red- black	30 V	9.5	13.7	8.6
For Siemens system, green jacket					
111452	(2x2x0.18) Star quad, black, red, orange, brown	30 V	5.0	4.2	2.2
111453	(4x2x0.18) black/brown, red/orange, green/yellow, blue/ violet	30 V	6.4	7.6	3.2
111412	(8x2x0.18) black/brown, red/orange, yellow/green, blue/ violet, grey/white, whiteblack/whitebrown, whitered/whiteorange, whitegreen/whiteyellow	30 V	8.1	13.1	7.3
111454	(12x0.23) black, brown, red, orange, green, yellow, blue, violet, grey, white, whiteblack, whitebrown	30 V	6.7	8.5	4.7
111455	(4x0.5+4x2x0.14) 0.5: white, blue, whitegreen, browngreen 0.14: violet/yellow, pink/grey, black/red, green/brown	300 V	8.0	9.0	4.9
111459	(2x(0.5)+3x(2x0.14)) 0.5: black, red 0.14: black/brown, red/orange, green/yellow	300 V	8.7	12.8	6.9
111456	(4x0.5+4x2x0.38) 0.5: whiteblue, whiteblack, whitered, whiteyel- low 0.38: black/brown, red/orange, green/yellow, blue/violet	300 V	9.2	13.2	8.6
111457	(2x0.5+3x(2x0.14)+4x0.23+4x0.14) 0.5: brownblue, brownred 0.23: greenblack, greenred, brownyellow, browngrey (0.14) black/brown, red/orange, yellow/green 0.14: blue, grey, whiteblack, whiteyellow	30 V	10.3	15.3	9.3
111458	(2x0.5+3x(2x0.14)+4x0.14) 0.5: brownblue, brownred (0.14) black/brown, red/orange, green/yellow 0.14: blue, grey, whiteblack, whiteyellow	30 V	8.5	12.2	6.1
111499	(2x0.5+3x2x0.14) 0.5: white, brown 0.14: green/yellow, grey/pink, blue/red	300 V	10.3	11.0	6.6

CE These products are in conformity to the EC Low Voltage Directive 73/23/EWG or 93/68/EWG respectively

PUR encoder cables, c-track suitable - For best performance

LÜTZE SUPERFLEX® PLUS (C) PUR SERVO Feedback cables cULus



Application

- Incremental encoder cable, termination cable for tachometer, brake sensor, speed sensor
- Through full PUR jacket and TPE cable insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments, machines and plants

Properties

- High active and passive interference-resistance (EMC)
- Braided shield optimised for continuous flexible use
- Very good alternating bending strength
- Low adhesion, abrasion-proof, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good industrial- and salt water resistance
- Excellent coolant and lubricant resistance
- Widely resistant to oils, greases, alcohol-free benzines and kerosene (see tech. information)
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

UL approval	300 V 80 °C
Rated voltage	300 V
Test voltage	2000 V
Insulation resistance	min. 200 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 20265-2; IEC 60332-1; UL 1581 section 1080 VW-1; CSA FT 1
Halogen-free	according to DIN EN 50264-1, EN 50267-2-1 and EN 60684-2

Design

- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special TPE conductor insulation, UL qualified
- Conductors colour-coded for specific system
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over stranded cable
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour green RAL 6018

Part-No.	Number of strands/cross-section/ strand colours	Jacket	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
For Fanuc system					
111490	(5×0.5+1×2×0.18) 0.5: green, yellow, grey, pink, blue 0.14: white/brown	green	7.5	8.1	4.9
111491	(5×0.5+2×2×0.18) 0.5: green, yellow, grey, pink, blue 0.14: white/brown, black/violet	green	7.8	9.3	6.3
111492	(6×0.5+3×2×0.18) 0.5: black 1-3, red 4-6 0.14: black/red, white/red, black/white	green	8.7	9.8	6.3
For NUM system					
111416	4×(2×AWG22) black/white, black/green, black/blue, black/red	green	10.3	11.0	6.6
111417	4×(2×AWG2)+2×(2×2) 0.5: black/orange, black/green 0.22: black/white, black/pink, black/ blue, black/red	green	12.5	18.0	11.9
For Berger Lahr system					
111479	(1×2×0.5+5×2×0.25) 0.5: blue, red 0.25: white/brown, green/yellow, grey/ pink, black/violet, greypink/redblue	green	8.7	14.0	5.8
For B+R system					
111437	(3×2×AWG24/19) white/brown, green/yellow, grey/pink	green	6.6	6.9	2.7
111438	(2×0.5+5×2×0.14) 0.5: blue, red 0.14: white/brown, green/yellow, grey/ pink, black/violet, greypink/redblue	green	7.8	12.5	5.0

CE These products are in conformity to the EC Low Voltage Directive 73/23/EWG or 93/68/EWG respectively

PUR encoder cables, c-track suitable - For best performance

LÜTZE SUPERFLEX® PLUS (C) PUR SERVO Feedback cables



Application

- Incremental encoder cable, termination cable for tacho sensor, brake sensor, speed sensor
- Through full PUR jacket and TPE cable insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments, machines and plants

Properties

- High active and passive interference-resistance (EMC)
- Braided shield optimised for continuous flexible use
- Very good alternating bending strength
- Low adhesion, abrasion-proof, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good industrial- and salt water resistance
- Excellent coolant and lubricant resistance
- Widely resistant to oils, greases, alcohol-free benzines and kerosene (see tech. information)
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Rated voltage	300 V
Test voltage	2000 V
Insulation resistance	min. 200 MΩ x km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D x 12
fixed	D x 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1,

Design

- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special TPE conductor insulation, UL certified
- Conductors colour-coded for specific system
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over stranded cable
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour green RAL 6018 or orange RAL 2003

Part-No.	Number of strands/cross-section/ strand colours	Jacket	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
For Heidenhain System					
111092	(2×0.5+10×0.14) 0.5: white, brown 0.14: white, brown, green, yellow, grey, pink, blue, red, black, violet	orange	6.6	7.0	4.6
111093	(4×0.5+10×0.14) UR 0.5: white, brown, green, yellow 0.14: white, brown, green, yellow, grey, pink, blue, red, black, violet	orange	7.6	8.5	5.6
111094	(2×(0.5)+3×(2×0.14)) 0.5: white, brown 0.14: green/yellow, grey/pink, blue/red	orange	8.4	12.0	6.7
111100	(4×0.5+4×2×0.14) 0.5: white, blue, whitegreen, browngreen 0.14: yellow/violet, brown/green, black/ red, grey/pink	orange	8.0	9.3	4.9
111101	(2×1.0+3×(2×0.14)) 0.5: white, brown 0.14: green/yellow, grey/pink blue/red	orange	8.0	9.2	5.8

CE These products are in conformity to the EC Low Voltage Directive 73/23/EWG or 93/68/EWG respectively

PUR servo cables - halogen-free

LÜTZE-SILFLEX® M (C) PUR SERVO 0.6/1 kV With or without shielded control pair



Application

- Motor supply cable in machine and device construction, transport and conveyor technology, heating, climate technology
- Especially for industrial environments with high interference potential, in machine, plant and device construction
- Cables with integrated, shielded measurement circuit cable for motor protector devices
- For flexible application without compulsory guide

Properties

- High active and passive interference resistance
- Low capacitance, very good electrical properties
- Very good cold flexibility
- Halogen-free, no corrosive gases
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

Voltage	
U_0/U	0.6/1 kV
Test voltage	4000 V
Insulation resistance	min. 100 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 10
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 Kl. 5 or IEC 60228 cl. 5
- Special thermoplastic conductor insulation
- Conductor marking: Power conductors black with number print U/L1/C/L+; V/L2; W/L3/D/L-
- Ground conductor greenyellow according to DIN EN 50334
G = with greenyellow ground conductor; x = without ground conductor
- Control pair(s) (black; white) or (5,6) (7,8)
control pair(s) with braided shield and foil banding
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour orange RAL 2003

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
without control pair				
111720	(4G1.5)	9.8	13.8	9.0
111721	(4G2.5)	11.3	20.3	13.3
111722	(4G4)	13.4	29.3	21.2
111723	(4G6)	14.9	39.5	29.7
111724	(4G10)	18.8	65.1	46.7
111725	(4G16)	21.5	93.8	71.4
with control pair				
108515	(4G1.5+2x(2x1.5))	12.5	24.6	15.3
108516	(4G2.5+2x(2x1.5))	14.1	32.4	20.8
108517	(4G4+2x(2x1.5))	15.8	41.5	27.4
108518	(4G6+2x(2x1.5))	16.7	52.7	35.9
108519	(4G10+2x(2x1.5))	19.1	75.4	52.1
108520	(4G16+2x(2x1.5))	21.0	102.7	75.9
108521	(4G25+2x(2x1.5))	28.5	156.0	115.4
108522	(4G35+2x(2x1.5))	31.8	201.7	155.5
with two control pairs				
108524	(4G1.5+2x(2x0.75)StC)	14.5	32.5	19.4
108525	(4G2.5+2x(2x0.75)StC)	15.6	38.7	23.3
108526	(4G4+2x(2x1.0)StC)	17.3	49.6	30.9
108527	(4G6+2x(2x1.0)StC)	18.4	60.1	39.4
108528	(4G10+2x(2x1.0)StC)	22.5	86.0	56.4
108529	(4G16+2x(2x1.5)StC)	23.4	114.4	82.2
108530	(4G25+2x(2x1.5)StC)	26.5	160.0	118.4
108531	(4G35+2x(2x1.5)StC)	34.1	208.5	159.3

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC servo cables

LÜTZE-SILFLEX® M (C)Y PVC SERVO 0.6/1 kV With or without shielded control pair(s)



Application

- Motor supply cable in machine and device construction, transport and conveyor technology, heating, climate technology
- In dry and moist rooms
- Cables with integrated, shielded measurement circuit cable for motor protector devices
- For flexible application without compulsory guide

Properties

- High active and passive interference resistance (EMC)
- PVC Flame-retardant, self-extinguishing
- Outer jacket special PVC TM5 according to HD 21.1
- Largely resistant to acids and bases (see tech. information)
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

Voltage	
U ₀ /U	0.6/1 kV
Test voltage	4000 V
Insulation resistance	min. 20 MΩ × km
Temperature range	
moving	-5 °C to +70 °C
fixed	-25 °C to +70 °C
Minimum bending radius	
moving	D × 10
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 Kl. 5 or IEC 60228 cl. 5
- Special PVC conductor insulation
- Conductors black with white number print according to DIN EN 50334
- Ground conductor greenyellow according to DIN EN 50334
G = with greenyellow ground conductor; x = without ground conductor
- Control pair(s) (black; white) or (5,6) (7,8)
control pair(s) with braided shield and foil banding
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Jacket special PVC TM5 according to HD21.1, matt, adhesion-free surface
- Jacket colour orange RAL 2003 or grey RAL 7001

Part-No.	Number of strands/cross-section	Jacket	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
without control pair, without inside jacket					
116260	(4G1.5)	orange	9.8	26.3	10.1
116261	(4G2.5)	orange	11.3	42.3	16.8
116262	(4G4)	orange	13.4	58.9	24.4
116263	(4G6)	orange	14.9	73.5	32.7
116264	(4G10)	orange	18.8	115.6	50.6
116265	(4G16)	orange	21.5	163.2	75.4
116266	(4G25)	orange	26.0	216.1	111.9
with control pair, with inside jacket					
116194	(4G1.5)	grey	9.6	26.3	10.1
116195	(4G2.5)	grey	13.8	42.3	16.8
116196	(4G4)	grey	15.3	58.9	24.4
116197	(4×6)	grey	17.9	73.0	32.7
116198	(4G10)	grey	21.4	115.6	50.6
with control pair, without inside jacket					
101399	(4G1.5+(2×1.5))	orange	12.5	24.6	15.3
108299	(4G2.5+(2×1.5))	orange	14.1	32.4	20.8
108500	(4G4+(2×1.5))	orange	15.8	41.5	27.4
108300	(4G6+(2×1.5))	orange	16.7	52.7	35.9
108501	(4G10+(2×1.5))	orange	19.1	75.4	52.0
108502	(4G16+(2×1.5))	orange	21.0	102.7	75.9
108503	(4G25+(2×1.5))	orange	28.5	156.0	115.4
108504	(4G35+(2×1.5))	orange	31.8	201.7	155.5
with two control pairs, without inside jacket					
101445	(4×0.75+2×(2×0.34))	grey	11.6	20.5	10.7
101667	(4G1.5+2×(2×0.75)StC)	orange	14.5	32.5	17.0
108506	(4G2.5+2×(2×0.75)StC)	orange	15.6	38.7	23.3
108507	(4G4+2×(2×1.0)StC)	orange	17.3	49.6	30.9
108508	(4G6+2×(2×1.0)StC)	orange	18.4	60.1	39.4
108509	(4G10+2×(2×1.0)StC)	orange	22.5	86.0	56.4
108510	(4G16+2×(2×1.5)StC)	orange	23.4	114.4	82.2
108511	(4G25+2×(2×1.5)StC)	orange	26.5	160.0	118.4
108512	(4G35+2×(2×1.5)StC)	orange	34.1	208.5	159.3

CE These products are in conformity with the EC Low Voltage Directive 73/23/EWG or 93/68/EWG

LÜTZE-SILFLEX® is a registered trademark in the USA

Encoder cables - shielded

LÜTZE-SILFLEX® (C) Y SERVO LÜTZE-SILFLEX® (C) PUR SERVO



Application

- Incremental encoder cable, termination cable for tacho sensor, brake sensor, speed sensor
- In dry and moist rooms
- For flexible application without compulsory guide

Properties

- High active and passive interference resistance (EMC)
- PVC Flame-retardant, self-extinguishing
- Outer jacket special-PVC TM2 according to HD 21.1
- Largely resistant to acids and bases (see tech. information)
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

Rated voltage	300 V
Test voltage	2000 V
Insulation resistance	min. 20 MΩ x km
Temperature range	
moving	-5 °C to +70 °C
fixed	-25 °C to +70 °C
Burning behaviour	Flame-retardant according to VDE 0482 265-2; DIN EN 50265-2; IEC 60332-1

Design

- Bare copper braid, fine stranded according to DIN VDE 0295 cl. 6 and IEC 60228 cl. 5
- Special PVC conductor insulation
- Colour coded wires
- Ground conductor green/yellow according to DIN EN 50334
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Jacket special PVC or PUR TM2 according to HD21.1, matt, adhesion-free surface
- Jacket colour orange RAL 2003 or grey RAL 7001 or green RAL 6018

Part-No.	Number of strands/cross-section/ strand colours	Jacket	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
For Heidenhain system					
110138	(2x0.5+10x0.14) 0.5: white, brown 0.14: white, brown, green, yellow, grey, pink, blue, red, black, violet	PVC grey	7.9	9.3	5.6
118035	(4x0.5+10x0.14) 0.5: white, brown, green, yellow 0.14: white, brown, green, yellow, grey, pink, blue, red, black, violet	PVC grey	9.0	12.0	6.5
110652	(2x(0.5)+3x(2x0.14)) 0.5: white, brown 0.14: green/yellow, grey/pink, blue/red	PVC grey	8.0	10.2	6.1
118685	(4x0.5+4x2x0.14) 0.5: black/white, red/blue, violet, green/ pink 0.14: white/brown, green/yellow, grey/ pink, blue/red	PVC grey	9.4	9.9	5.5
For Indramat System					
108540	(2x0.5+4x2x0.25) 0.5: white, brown 0.25: brown/green, grey/pink, blue/vio- let, red/black	PVC orange	8.6	10.0	5.6
For Siemens system					
111041	(2x0.5+3x(2x0.14)) 0.5: white, brown 0.14: green/yellow, grey/pink, blue/red	PVC grey	8.2	8.0	6.1
108543	(2x0.5+3x(2x0.14)+4x0.14) 0.5: brown/blue, brown/red (0.14): black/brown, red/orange, yel- low/green 0.14: blue, grey, white/black, white/yel- low	PUR green	8.8	12.2	6.1
108544	(4x0.5+4x2x0.38) 0.5: white/blue, white/black, white/red, white/yellow 0.38: black/brown, red/orange, green/ yellow, blue/violet	PUR green	9.0	14.4	7.3
108545	(2x0.5+3x(2x0.14)+4x0.14+4x0.23) 0.5: brown/blue, brown/red 0.23: green/black, green/red, brown/yel- low, brown/grey (0.14): black/brown, red/orange, yel- low/green 0.14: blue, grey, white/black, white/yel- low	PUR green	10.5	15.7	8.2

CE These products are in conformity with the EU Low Voltage Direc-
tive 2006/95/EC

4. BUS and network cables



Bus and Network Cables · Overview



No. 1



No. 2



No. 3



No. 4



No. 5



No. 6



No. 7



No. 8

Product	Construction						Characteristics						Application/usage					Approvals					Page	No.
	Isolation	Labelling	Inner jacket	Shield	Outer jacket	Cross-sectional area	Oil resistant	Abrasion-proof	Flexible	Chemical resistant	Halogen free	Nominal voltage (V)	Application	Flexible	Continuous use with compulsory guide	Torsion	Mechanical conditions	Temperature range °C	UL/CSA recognized	UL listed	VDE/HAR	FDA		
LÜTZE SUPERFLEX® BUS (C) PUR	Poly-olefin	coloured (TPE)	●	PUR	0,22	● ● ● ● ●	250	Profibus	● ●	-	high	-25 +80	● ●										4.4	1
LÜTZE ELECTRONIC® BUS (C)	Poly-olefin	coloured (TPE)	●	various	0,34	○ ○ ○ ○ ○	250	Profibus	○ -	-	low	-5 +70	● ●										4.5	2
LÜTZE SUPERFLEX® BUS (C) PUR	Poly-olefin	coloured	-	PUR	0,25	● ● ● ● ●	300	CAN INTERBUS	● ●	-	high	-20 +80	●										4.6	3
LÜTZE ELECTRONIC® BUS (C) Y	Poly-olefin	coloured	-	PVC	0,22-0,5	○	○	CAN INTERBUS	● -	-	low	-5 +70	●										4.7	4
LÜTZE SUPERFLEX® ET BUS (C) PUR	Poly-olefin	coloured TPE	●	PUR	0,14-0,34	● ● ● ● ●	250	Ind. Ether	● ●	-	high	-25 +70	● ●										4.8	5
LÜTZE ELECTRONIC® ET BUS (C)	Poly-olefin	coloured various	●	various	0,14-0,34	○ ○ ○ ○ ○	250	Ind. Ether	● -	-	low	-5 +70	● ●										4.9	6
LÜTZE SUPERFLEX® Device Net (C) PUR	Poly-olefin	coloured	●	PUR	0,22-1,5	● ● ● ● ●	300	Device Net	● ●	-	high	-20 +80	●										4.10	7
LÜTZE ELECTRONIC® LI BUS AS	Poly-olefin	coloured	various	various	1,5	○ ○ ○ ○ ○	300	ASI Bus	● -	-	low	-30 +85											4.11	8

● = suitable
○ = conditionally suitable

Notes

PUR Bus conductors - C-track compatible

LÜTZE SUPERFLEX® BUS (C) PUR Profibus



Application

- For the cabling of industrial field bus systems like PROFIBUS DP, SINEC L2, F.I.P.
- For continuous flexible use e.g. in c-tracks or free movement in automation technology, transport and conveyor technology, machine tool manufacture

Properties

- High active and passive interference resistance
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Impedance 150 Ω ± 15 %

Loop resistance <133 Ω/km

Operating capacitance < 30 pF/m

Voltage

Signal 250 V

Supply 300 V

Test voltage

Signal 1500 V

Supply 3000 V

Temperature range

moving -20 °C to +80 °C

fixed -40 °C to +80 °C

Minimum bending radius

moving D × 15

fixed D × 7.5

Burning behaviour

Flame-retardant according to VDE 0482 part 265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1

Halogen-free

according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Approvals

UL listed CMX 75 °C (see article description **UL**)

UL recognized 60 °C 30 V (see article description **UR**)

Note

Note on laying PVC C-track cables in chapter 2 of the catalogue TK1.
Bus cables for robot applications see chapter on robot cables.

Design

- Bare copper wire
- Braid according to AWG
Braid AWG 24/19 = 0.64 mm Ø
- Conductor insulation special polyolefin
- Stranding with filler
- ST static shield
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %, at FC 70 %
- Special PUR, matt, adhesion-free surface
- Jacket colour violet, RAL 4001

Part-No.	Number of strands/cross-section/ strand colours	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
104215	(1×2×0.64/AWG24/19)StC red, green	7.8	6.5	3.0
104265	(1×2×0.64/AWG24/19)StC UL red, green	7.8	6.5	3.0
104275	(1×2×0.64/AWG24/19+3G0.75)StC UR red, green blue, black greenyellow	9.8	14.4	6.6
With inside jacket, easy stripping				
104287	(1×2×0.64/AWG24/19)StC FC UR red, green	8.0	8.5	3.0

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

Bus cables for Profibus

LÜTZE ELECTRONIC BUS (C) Profibus



Application

- For the cabling of industrial field bus systems like PROFIBUS DP, SINEC L2, F.I.P.
- With solid conductor AWG22/1 for hard wiring or with stranded conductor for moving use without compulsory guide in the automation technology, transport and conveyor technology, machine tool manufacture

Properties

- High active and passive interference resistance
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Impedance	150 Ω ± 15 %
Loop resistance	
Braid AWG 22/7 = 0.34 ²	<110 Ω/km
Wire AWG 22/1 = 0.34 ²	<110 Ω/km
Operating capacitance	< 30 pF/m
Voltage	
Signal	250 V
Supply	300 V
Test voltage	
Signal	1500 V
Supply	3000 V
Temperature range	
moving	-5 °C to +70 °C
fixed	-30 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1 PE jacket not flame-resistant
Approvals	UL listed CMG 75 °C (see article description UL)

Design

- Bare copper wire
- Wire according to AWG or DIN, solid wire according to DIN
Lütze AWG22/7 0,34 mm² = 0.75 mm ∅
wire AWG22/1 0.34 mm² = 0.64 mm ∅
- Conductor insulation special polyolefin
- Stranding with filler
- ST static shield
- Meshwork from tinned copper wire braid, optical covering approx. ≥ 80 %, at FC 70 %
- Jacket special thermoplastic, matt, adhesion-free surface
PUR for industrial environment, halogen-free
HM = halogen-free, flame-retardant, low smoke
PE for food areas, halogen-free
Mod-PE can be laid in earth
- Jacket colour violet RAL 4001 or black RAL 9005

Part-No.	Number of strands/cross-section/ strand colours	Jacket	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
104214	(1x2x0.64/AWG22/7)StC red, green	PVC violet	7.8	6.8	3.0
104292	(1x2x0.64/AWG22/1)StC red, green	PVC violet	7.8	5.9	3.0
104264	(1x2x0.64/AWG22/7)StC UL red, green	PVC violet	7.8	6.7	3.0
104224	(1x2x0.64/AWG22/7+3x0.75)StC red, green blue, black greenyellow	PVC violet	10.7	14.4	5.7
104290	(1x2x0.64/AWG22/1)StC red, green	PE black	7.8	6.4	3.0
With inside jacket, machinable peel off					
104267	(1x2x0.64/AWG22/1)StC FC red, green	HM violet	7.8	7.7	3.0
104251	(1x2x0.64/AWG22/1)StC FC red, green	PUR violet	7.8	7.8	3.0
104284	(1x2x0.64/AWG22/1)StC FC red, green	Mod-PE black	9.8	9.8	3.0
104291	(1x2x0.64/AWG22/1)StC FC red, green	PE black	7.8	6.5	3.0
104293	(1x2x0.64/AWG22/1)StC FC UL red, green	PVC violet	7.8	7.4	3.0

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PUR Bus conductors - C-track compatible

LÜTZE SUPERFLEX® BUS (C)PUR CAN-BUS, INTERBUS



Application

- For wiring of industrial field bus systems such as CAN-BUS and INTERBUS-S
- For continuous flexible use e.g. in c-tracks or free movement in the automation technology, transport and conveyor technology, machine tool manufacture

Properties

- High active and passive interference resistance
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Impedance	100 or 120 Ω
Loop resistance	
Braid AWG 24/19= 0.24 ²	<155 Ω/km
Braid DIN 0.25 ²	<145 Ω/km
Braid DIN 1.0 ²	<41 Ω/km
Operating capacitance	< 60 pF/m
Voltage	
Signal	300 V
Supply	300 V
Test voltage	
Signal	3000 V
Supply	3000 V
Temperature range	
moving	-20 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2
Approvals	UL recognized 80°C 30 V (see article description UR)
Note	Note on laying PVC C-track cables in chapter 2 of the catalogue TK1. Bus cables for robot applications see chapter on robot cables.

Design

- Bare copper wire
- Wire according to AWG or DIN
- Conductor insulation special polyolefin
- Conductors stranded pairs, foil banding
- Galvanised copper wire braid, optical coverage ≥ 85 %
- Jacket special-PUR or PVC, matt, adhesion-free surface
- Jacket colour violet RAL 4001

Part-No.	Number of strands/cross-section/ strand colours	Jacket	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
CAN-BUS					
Impedance 120 Ω					
104202	(1×2×0.25) white/brown	PUR	6.1	4.3	2.1
104220	(2×2×0.25/AWG24/19) Star quad Transmission pair: white-brown; green-yellow	PUR	6.0	6.7	2.7
104210	(1×2×0.25+3G1.0) BUS: white, brown Supply: red, blue, greenyellow	PUR	7.5	11.0	5.1
104252	(1×2×0.25/AWG24/19) UR white/brown	PUR	6.1	4.3	2.1
104270	(2×2×0.25/AWG24/19) UR Star quad Transmission pair: white-brown; green-yellow	PUR	6.0	5.8	2.4
INTERBUS					
impedance 100 Ω					
104208	(3×2×0.25) white/brown; green/yellow; grey/pink	PUR	7.7	6.0	3.3
104258	(3×2×0.25/AWG24/19) UR white/brown; green/yellow; grey/pink	PUR	7.8	6.0	3.3
104259	(3×2×0.25/AWG24/19+3G1.0) UR white/brown; green/yellow; grey/pink; blue, red, greenyellow	PUR	8.3	13.9	8.8

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC Bus conductors

LÜTZE ELECTRONIC BUS (C) Y CAN-BUS, INTERBUS



Application

- For wiring of industrial field bus systems such as CAN-BUS and INTERBUS-S
- For hard wiring or moving use without compulsory guide in the automation technology, transport and conveyor technology, machine tool manufacture

Properties

- High active and passive interference resistance
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Impedance	100 or 120 Ω
Loop resistance	
Braid AWG 24/7= 0.22 ²	<165 Ω/km
Braid 0.34 ²	<110 Ω/km
Wire 0.5 ²	<78 Ω/km
Operating capacitance	< 60 pF/m
Rated voltage	300 V
Test voltage	1500 V
Temperature range	
moving	-5 °C to +70 °C
fixed	-30 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; IEC 60332-1
Approvals	UL recognized 80°C 300 V (see article description UR)

Design


- Bare copper wire
- Wire according to AWG or DIN
- Conductor insulation special polyolefin
- Conductors stranded pairs, foil banding
- Galvanised copper wire braid, optical coverage ≥ 85 %
- Jacket special PVC TM2 according to HD21.1, matt, adhesion-free surface
- Jacket colour violet RAL 4001

Part-No.	Number of strands/cross-section/ strand colours	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
CAN-BUS				
Impedance 120 Ω				
104205	(1x2x0.22/AWG24/7) UR white/brown	4.7	5.3	2.5
104206	(2x2x0.22/AWG24/7) UR white/brown, green/yellow	7.0	4.3	2.4
104238	(2X2XAWG22) white/brown; green/yellow	10.3	12.3	5.0
104360	(2x2x0.5/AWG20/7)	11.3	12.8	5.9
INTERBUS				
impedance 100 Ω				
104207	(3x2x0.22/AWG24/7) UR white/brown, green/yellow, grey/pink	7.5	5.5	3.2

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

Bus conductors - C-track compatible

LÜTZE SUPERFLEX® ETHERNET BUS (C) PUR

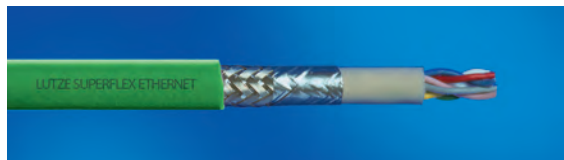

Application

- For the cabling of industrial field bus systems with the globally accepted TCP/IP protocol
- Applicable in automation technology, transport and conveyor technology, machine tool manufacture
- For continuous flexible application e.g. in C-tracks or free movement

Properties

- High active and passive interference resistance
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Impedance	100 Ω ± 10 % (1–100 MHz)
Loop resistance	
Braid AWG 23/19= 0.30 ²	<130 Ω/km
Braid AWG 24/19= 0.24 ²	<155 Ω/km
Braid AWG 26/19= 0.14 ²	<280 Ω/km
Braid AWG 22/7= 0.34 ²	<110 Ω/km
Operating capacitance	<50 pF/m
Rated voltage	250 V
Test voltage	1500 V
Temperature range	
moving	-25 °C to +70 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 6
Fire performance	Flame-retardant according to VDE 0482 part 265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2
Approvals	UL listed PLTC (see article description UL) UL recognized 80 °C 30 V (see article description UR)
Note	Note on laying PVC C-track cables in chapter 2 of the catalogue TK1. Bus cables for robot applications see chapter on robot cables.

Design


- Bare copper wire
- Braid according to AWG
- Conductor insulation special polyolefin
- ST static shield
- Halogen-free inside jacket
- Galvanised copper wire braid, optical coverage ≥ 85 %
- Jacket special-PUR, matt, adhesion-free surface
- Jacket colour violet RAL 4001; green RAL 6018; black RAL 9005

Part-No.	Number of strands/cross-section/ strand colours	Jacket	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
SUPERFLEX Fast Ethernet / ProfiNet					
104304	(2×2×AWG23/19)StC Cat5 UR Star quad; ProfiNet Transmission pair white/blue; yellow/ orange	PUR green	6.6	7.5	3.7
104246	(4×2×AWG24/19) Cat5 UR white/brown, green/yellow, grey/pink, blue/red	PUR violet	9.6	12.5	5.7
104245	(2×2×AWG24/19) Cat5 UR Star quad Transmission pair white/brown; green/ yellow	PUR violet	6.1	6.5	3.7
104303	(2×2×AWG22/7)StC Cat5 UL Star quad; ProfiNet Transmission pair white/blue; yellow/ orange	PUR green	6.5	6.1	3.1
104326	(4×2×AWG26/19) Cat5e whiteblue/blue, whiteorange/orange, whitegreen/green, whitebrown/brown	PUR green	6.3	5.2	3.0
104337	(4×2×AWG24/19) Cat5e UR whiteblue/blue, whiteorange/orange, whitegreen/green, whitebrown/brown	PUR green	7.8	6.8	5.5
104347	(4×2×AWG26/19) Cat6 whiteblue/blue, whiteorange/orange, whitegreen/green, whitebrown/brown	PUR green	7.9	6.3	4.2
For Siemens Drive-Clq® system					
104310	(2×2×AWG26+2×AWG22) pink/blue, yellow/green red, black	PUR green	6.8	7.3	3.4

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

Bus cables

LÜTZE ELECTRONIC ETHERNET BUS (C) PUR LÜTZE ELECTRONIC ETHERNET BUS (C) PVC

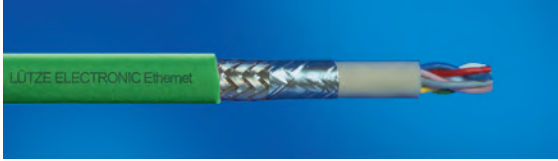

Application

- For the cabling of industrial field bus systems with the globally accepted TCP/IP protocol
- Applicable in automation technology, transport and conveyor technology, machine tool manufacture
- For hard wiring or moving use without compulsory guide in the automation technology, transport and conveyor technology, machine tool manufacture

Properties

- High active and passive interference resistance
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Impedance	100 Ω ± 10 % (1–100 MHz)
Loop resistance	
Wire AWG 22/1= 0.34 ²	<110 Ω/km
Braid AWG 24/7= 0.22 ²	<165 Ω/km
Braid AWG 26/7=0.14 ²	<273 Ω/km
Operating capacitance	< 50 pF/m
Rated voltage	250 V
Test voltage	1500 V
Temperature range	
moving	-5 °C to +70 °C
run	-30 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2
Approvals	UL listed CMG or CMX 75 °C (see article description UL) UL recognized 80 °C 30 V (see article description UR)

Design

- Bare copper wire
- Braid according to AWG
- Conductor insulation special polyolefin
- ST static shield
- Galvanised copper wire braid, optical coverage ≥ 85 %
- Jacket special-PUR, matt, adhesion-free surface or PVC
- Jacket colour violet RAL 4001; green RAL 6018

Part-No.	Number of strands/cross-section/ strand colours	Jacket	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
ELECTRONIC Fast Ethernet / ProfiNet					
104247	(2x2x0.22/AWG24/7) Cat5 UR Star quad Transmission pair white/brown; green/ yellow	PUR violet	6.1	6.5	2.5
104243	(2x2x0.22/AWG24/7) Cat5 Star quad Transmission pair white/brown; green/ yellow	PUR violet	6.1	6.5	2.5
104301	(2x2x0.64/AWG22/1)StC Cat5 UL Star quad, FC, ProfiNet type A Transmission pair white/blue, yellow/ orange	PVC green	6.5	6.5	3.7
104307	(2x2x0.34/AWG22/7)StC Cat5 UL Star quad, FC, ProfiNet type B Transmission pair white/blue, yellow/ orange	PVC green	6.5	6.5	3.1
104327	(4x2xAWG26/7 StC) Cat5e UL whiteblue/blue, whiteorange/orange, whitegreen/green, whitebrown/brown	PUR green	6.3	5.0	3.0
104335	(4x2xAWG26/7 StC) Cat5e UL whiteblue/blue, whiteorange/orange, whitegreen/green, whitebrown/brown	PVC green	6.3	5.4	3.0
104336	(4x2xAWG24/7 StC) Cat5e UL whiteblue/blue, whiteorange/orange, whitegreen/green, whitebrown/brown	PVC green	7.6	6.7	5.5
104338	(4x(2xAWG26/7)St)C Cat6 UL whiteblue/blue, whiteorange/orange, whitegreen/green, whitebrown/brown	PVC green	6.4	5.3	3.3
104339	(4x(2xAWG26/7)St)C Cat7 UL whiteblue/blue, whiteorange/orange, whitegreen/green, whitebrown/brown	PUR green	7.0	6.1	3.3
For Siemens Drive-Cliq® system					
104313	(2x2xAWG26) green/yellow, blue/red	PVC green	6.8	7.3	3.4
104311	(2x2xAWG26+2xAWG22) AWG26: green/yellow, blue/pink AWG22: red, black	PUR green	6.8	7.3	3.4

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PUR Bus conductors - C-track compatible

LÜTZE SUPERFLEX® DeviceNet™ (C) PUR



Application

- For the wiring of industrial devices, sensors, control devices (SPS), valves
- DeviceNet™ is the leading BUS system for industry automation in the USA
- For continuous flexible application e.g. in c-tracks or free movement in the automation technology, transport and conveyor technology, machine tool manufacture

Properties

- 2-pair cable: The pair with the smaller cross section serves for the data transmission, the pair with the larger cross section is for the power supply
- High active and passive interference resistance through double shielding (StC)
- Free from silicon paint wetting disruptive substances (LABS-free)
- RoHS-compliant

Technical data

Impedance	120 Ω ± 10 %
Operating capacitance	< 40 pF/m
Rated voltage	300 V
Test voltage	3000 V
Temperature range	
moving	-20 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 6
Fire performance	Flame-retardant according to VDE 0482 part 265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2
Approvals	UL recognized 80 °C 30 V
Note	Notes on laying PVC C-track cables in chapter 2 of the catalogue TK1. Bus cables for robot applications see chapter on robot cables.

Part-No.	Number of strands/cross-section/ strand colours	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
104279	((2×1.5)+(2×0.75))StC-Thick 0.75: blue, white 1.5: red, black	11.3	18.0	8.5
104289	((2×0.34)+(2×0.22))StC-Thin 0.22: blue, white 0.34: red, black	7.0	7.5	3.4

Design

- Bare copper wire tinned
- Conductor insulation special polyolefin
- BUS element statically shielded
- Overall shield:
 static shield (foil)
 braid from galvanised Cu wire, optical coverage ≥ 85 %
- Jacket special-PUR, matt, adhesion-free surface
- Jacket colour violet RAL 4001

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

Bus cables

LÜTZE ELECTRONIC ASI BUS



Application

- System cables for connection of actuator interface components
- Application in the automation technology, in tool and machine construction, plants and device construction, transport and conveyor technology

Properties

- Inverse-polarity-proof flat cable
- Fast contacting through penetration technology
- In the TPE design especially suitable in areas in which oils, greases and cooling lubricants occur
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Rated voltage	300 V
Test voltage	2000 V
Temperature range	
EPDM moving	-30 °C to +85 °C
EPDM fixed	-40 °C to +85 °C
PUR moving	-30 °C to +80 °C
PUR fixed	-40 °C to +80 °C
TPE moving	-5 °C to +70 °C
TPE fixed	-30 °C to +70 °C
Loop resistance	27,4 mΩ/m
Cu-Index	2.9 kg/100 m
Weight	6.8 kg/100 m

Design

- Bare copper wire 1.5 mm²
- Wire according to VDE 0295 class 5
- Conductor insulation coloured, brown and blue
- Moulded outer jacket
- Jacket colour black: for auxiliary power 30 V_{DC}
- yellow: data and energy transmission

Part-No.	Number of strands/cross-section	Insulation	Jacket material	Jacket
1.5 mm²				
104203	2×1.5	EPDM	PUR	yellow
104204	2×1.5	EPDM	PUR	black
104216	2×1.5	PVC	TPE	yellow
104217	2×1.5	PVC	TPE	black
104219	2×1.5	EPDM	EPDM	yellow
104218	2×1.5	EPDM	EPDM	black

Bus cables and Industrial Ethernet

Bus cables

Since the mid-1980s, bus systems have been an important fixture of industrial automation systems. A basic distinction can be made among the following automation fields:

- **Factory automation:** the use of field buses such as PROFIBUS, INTERBUS, DeviceNet, CAN, Ethernet, etc.
- **Process automation:** control of processes in the chemical and petrochemical industries, including: Profibus PA, AS-i Bus, Ethernet
- **Building automation:** building management, including: EIB, Ethernet


Passive components also play an important role

Besides the hardware and software components, passive components such as the bus cables and connectors play a great role in functional reliability. Bus cables must satisfy the requirements of the respective systems with respect to all electro-technical parameters. For this reason there is no universally usable bus cable - the industrial requirements are too varied. Lütze offers the systems most commonly used worldwide for fixed laying (indoors and outdoors), as well as for flexible applications. The material selected must be able to cope with the mechanical and chemical stresses in the industrial environment, and the cables must be of sufficiently rugged construction. Electromagnetic compatibility (EMC) requirements are also becoming more and more important. Environmental protection aspects must likewise be taken into account.

Seamless flow of information

A fully-integrated communication structure between the production systems/attachments and the administrative office sphere creates a seamless flow of integration all the way from the actuator/sensor level to the company's executive management.

Because the conditions in the industrial environment differ significantly from those in office spaces, terminal equipment such as switches, firewalls and hubs have to be adapted for the often harsh environmental conditions. This includes, among other things, being able to snap the equipment onto a 35mm top hat rail, a 24 V power supply, higher IP protection ratings, the operating temperatures and increased resistance to various oils.

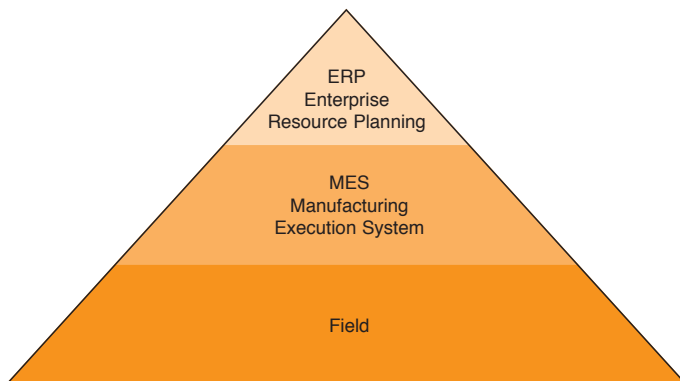

Seamless flow of information through vertical integration

Industrial Ethernet

Most commonly used communication technology

The most commonly used communication technology is Ethernet. It uses a wide variety of transmission media such as copper, glass or polymer fibres, or wireless. Unlike Ethernet, the various field bus systems operate using different physical transmission types, and thus no special infrastructure components are needed for the individual system. In many cases this means they are tied to a particular technology. Connection to the higher-level Ethernet is provided via gateways (translators).

With the Ethernet standard it is possible to increase the bandwidth significantly, from 12 Mbit/s with bus systems to up to 10 Gbit/s with Ethernet. Furthermore, the Ethernet protocol is open and allows vertical integration. A wide range of systems can be integrated into the Ethernet technology. For this reason, interest in integrating the Ethernet standard into production processes is increasing more and more.

Rugged infrastructure in industry

Ethernet has already established itself as a standard technology in the office sphere, but conditions in the industrial environment are significantly different from those in the office spaces. Firstly, a more rugged infrastructure is required, and secondly criteria such as real-time capability require special IT solutions. As a result, various suppliers have developed different systems (for example ProfiNet, EtherCAT, Modbus/TCP and PowerLink), which are not always compatible with each other. In contrast, Ethernet-compatible cabling according to EN 50173-3 supports any proprietary Ethernet system.

5. Robotic cables



Robot cables · Overview



No. 1



No. 2



No. 3



No. 4

LÜTZE SUPERFLEX® Robot

Product	Construction						Characteristics						Application/usage				Approvals					Page	No.			
	Isolation	Labelling	Inner jacket	Shield	Outer jacket	Cross-sectional area	Oil resistant	Abrasion-proof	Flexible	Chemical resistant	Halogen free	Nominal voltage (V)	Application	Flexible	Continuous use with compulsory guide	Torsion	Mechanical conditions	Temperature range °C	UL/CSA recognized	UL listed	VDE/HAR			FDA	CNOMO	
LÜTZE SUPERFLEX® Plus Robot N PUR	TPE	No.	-	-	PUR	1,0-35	●	●	●	●	●	300/500	Control Motor	●	-	●	high	-25 +80	●						5.4	1
LÜTZE SUPERFLEX® Plus Robot N (D) PUR	TPE	No.	-	●	PUR	1,0-2,5	●	●	●	●	●	300/500	Control Motor	●	-	●	high	-25 +80	●						5.5	2
LÜTZE SUPERFLEX® Plus Robot N (D) PUR Servo	TPE	No.	-	●	PUR	0,14-0,5	●	●	●	●	●	300	Feedback	●	-	●	high	-20 +80	●						5.6	3
LÜTZE SUPERFLEX® Plus Robot BUS (D) PUR	Poly-olefin	No.	-	●	PUR	0,14-0,34	●	●	●	●	●	250	Bus	●	-	●	high	-20 +80	●						5.6	4

● = suitable
○ = conditionally suitable

Notes

PUR Robot cables - Excellent torsional stress resistance

LÜTZE SUPERFLEX® PLUS ROBOT N PUR



Application

- Industrial robots, machine and device construction, transport and conveyor technology, assembly and welding robots
- Through full PUR jacket and TPE conductor insulation optimally suited, extremely harsh operating conditions, aggressive coolants and lubricants
- Anywhere where a torsional strain is present

Properties

- Flame-retardant, self-extinguishing
- halogen-free, no corrosive gases
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone, UV resistant (normal lighting conditions)
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

UL approval	600 V 80 °C
Voltage	
U_0/U	300/500 V
Test voltage	6000 V
Insulation resistance	min. 100 MΩ x km
Temperature range	
moving	-25 °C to +80 °C
run	-40 °C to +80 °C
Minimum bending radius	
moving	D x 15
fixed	D x 7
Torsion area	max. ± 360° / m
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1
Halogen-free	according to DIN EN 50264-1, EN 50267-2-1 ad EN 60684-2

Design

- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 5/6, IEC 60228 class 5/6
- Special TPE conductor insulation, UL qualified
- Conductors black with white number print according to DIN EN 50334
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
G = with green/yellow ground conductor; x = without ground conductor
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over stranded cable
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour black RAL 9005

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
Control cable LÜTZE SUPERFLEX® PLUS ROBOT N PUR				
112955	3G1.0	7.2	5.9	3.2
112916	4G1.0	7.7	9.5	4.3
112950	7G1.0	9.6	12.9	7.5
112917	12G1.0	11.2	22.9	12.8
112918	18G1.0	13.0	36.0	19.2
112919	25G1.0	15.6	42.0	26.7
112954	34G1.0	17.8	59.6	36.2
112957	18G1.5	15.0	39.8	28.8
112958	25G1.5	17.8	53.0	40.0
112959	4G2.5	10.0	15.4	10.7
Power cable LÜTZE SUPERFLEX® PLUS ROBOT N PUR				
112906	1x35	12.7	38.0	34.6
112911	3G16	19.0	89.0	52.1
112912	3G25	22.5	115.0	80.0
112913	3G35	26.5	155.0	114.4
112914	2x25+1G16	21.0	98.0	71.3

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PUR Robot cables - Excellent torsional stress resistance

LÜTZE SUPERFLEX® PLUS ROBOT N (D) PUR LÜTZE SUPERFLEX® PLUS ROBOT N (D) PUR SERVO



Application

- Industrial robots, machine and device construction, transport and conveyor technology, assembly and welding robots
- Through full PUR jacket and TPE conductor insulation optimally suited, extremely harsh operating conditions, aggressive coolants and lubricants
- Anywhere where a torsional strain is present

Properties

- Flame-retardant, self-extinguishing
- halogen-free, no corrosive gases
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone, UV resistant (normal lighting conditions)
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

UL approval	600 V 80 °C
Voltage	
U ₀ /U	300/500 V
Test voltage	6000 V
Insulation resistance	min. 100 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
run	-40 °C to +80 °C
Minimum bending radius	
moving	D × 15
fixed	D × 7
Torsion area	max. ± 360° / m
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1
Halogen-free	according to DIN EN 50264-1, EN 50267-2-1 ad EN 60684-2

Design

- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 5/6, IEC 60228 class 5/6
- Special TPE conductor insulation, UL qualified
- Conductors black with white number print according to DIN EN 50334
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
G = with green/yellow ground conductor; x = without ground conductor
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over stranded cable
- Twisted shield made of tinned copper wire braid, visual coverage ≥ 98%
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour black RAL 9005

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
Control cable LÜTZE SUPERFLEX® PLUS ROBOT N (D) PUR				
112971	(3G1.0)	7.4	9.0	5.3
112972	(4G1.0)	7.9	11.1	6.5
112973	(5G1.0)	8.5	13.4	7.9
112974	(7G1.0)	10.0	17.5	10.3
112975	(3G1.5)	8.2	12.2	7.2
112976	(4G1.5)	8.8	15.6	9.2
112977	(5G1.5)	9.6	18.7	11.0
112978	(7G1.5)	11.2	25.2	14.8
Servo cable LÜTZE SUPERFLEX® PLUS ROBOT N (D) PUR SERVO				
112915	(4G1.5+(2×1.0))	12.0	20.5	12.8
112900	(4G1.5+2×(2×0.5))	12.4	27.0	13.0
112901	(4G2.5+2×(2×0.5))	12.8	31.5	18.9

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PUR Robot cables - Excellent torsional stress resistance

LÜTZE SUPERFLEX® PLUS ROBOT (D) PUR BUS cables, servo encoder cables



Application

- Industrial robots, machine and device construction, transport and conveyor technology
- With stranded wire for moving use in automation technology, transport and conveyor technology, tool and machine construction
- Anywhere where a torsional strain is present

Properties

- High active and passive interference resistance
- Flame-retardant, self-extinguishing
- halogen-free, no corrosive gases
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

UL approval	BUS cables 30 V 80 °C Encoder cables 300 V 80 °C
Voltage	
BUS	250 V
Encoder	300 V
Test voltage	
BUS	1500 V
Encoder	3000 V
Insulation resistance	min. 100 MΩ × km
Temperature range	
moving	-20 °C to +80 °C
run	-40 °C to +80 °C
Minimum bending radius	
moving	D × 15
fixed	D × 7
Torsion area	max. ± 360° / m
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1
Halogen-free	according to DIN EN 50264-1, EN 50267-2-1 and EN 60684-2


Design

- Bare copper wire, finest multi-strand according to DIN VDE 0295
- Special polyolefines, UL approved
- Colour coded wires
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over stranded cable
- Twisted shield of tin-plated Cu wires, visual coverage ≥ 98%
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour
Bus cables violet RAL 4001
Encoder cables black RAL 9005
Ethernet cables green RAL 6018

Part-No.	Number of strands/cross-section	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
LÜTZE SUPERFLEX® PLUS ROBOT (D) PUR - BUS				
Profibus – characteristic impedance 150 Ω				
104323	(1×2×0.64/AWG24)StD	8.2	7.5	2.5
DeviceNet – characteristic impedance 120 Ω				
104324	(1×2×AWG24+1×2×AWG22)StD	9.8	8.6	3.8
CAN-Bus – characteristic impedance 120 Ω				
104294	(2×2×0.34)StD	7.3	6.9	3.1
Industrial Ethernet Cat5				
104318	(2×2×AWG26/19)StD Cat5	6.6	5.0	2.1
104319	(4×2×AWG26/19)StD Cat5	7.4	7.7	3.0
LÜTZE SUPERFLEX® PLUS ROBOT (D) PUR – SERVO/Encoder				
112921	(4×2×0.14)	6.6	4.9	2.2
112922	(12×0.25)	7.3	7.2	4.2
112920	(14×0.5)	8.9	15.5	8.9
112904	(2×0.5+4×2×0.25)	7.4	9.0	4.6

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

6. Control cables

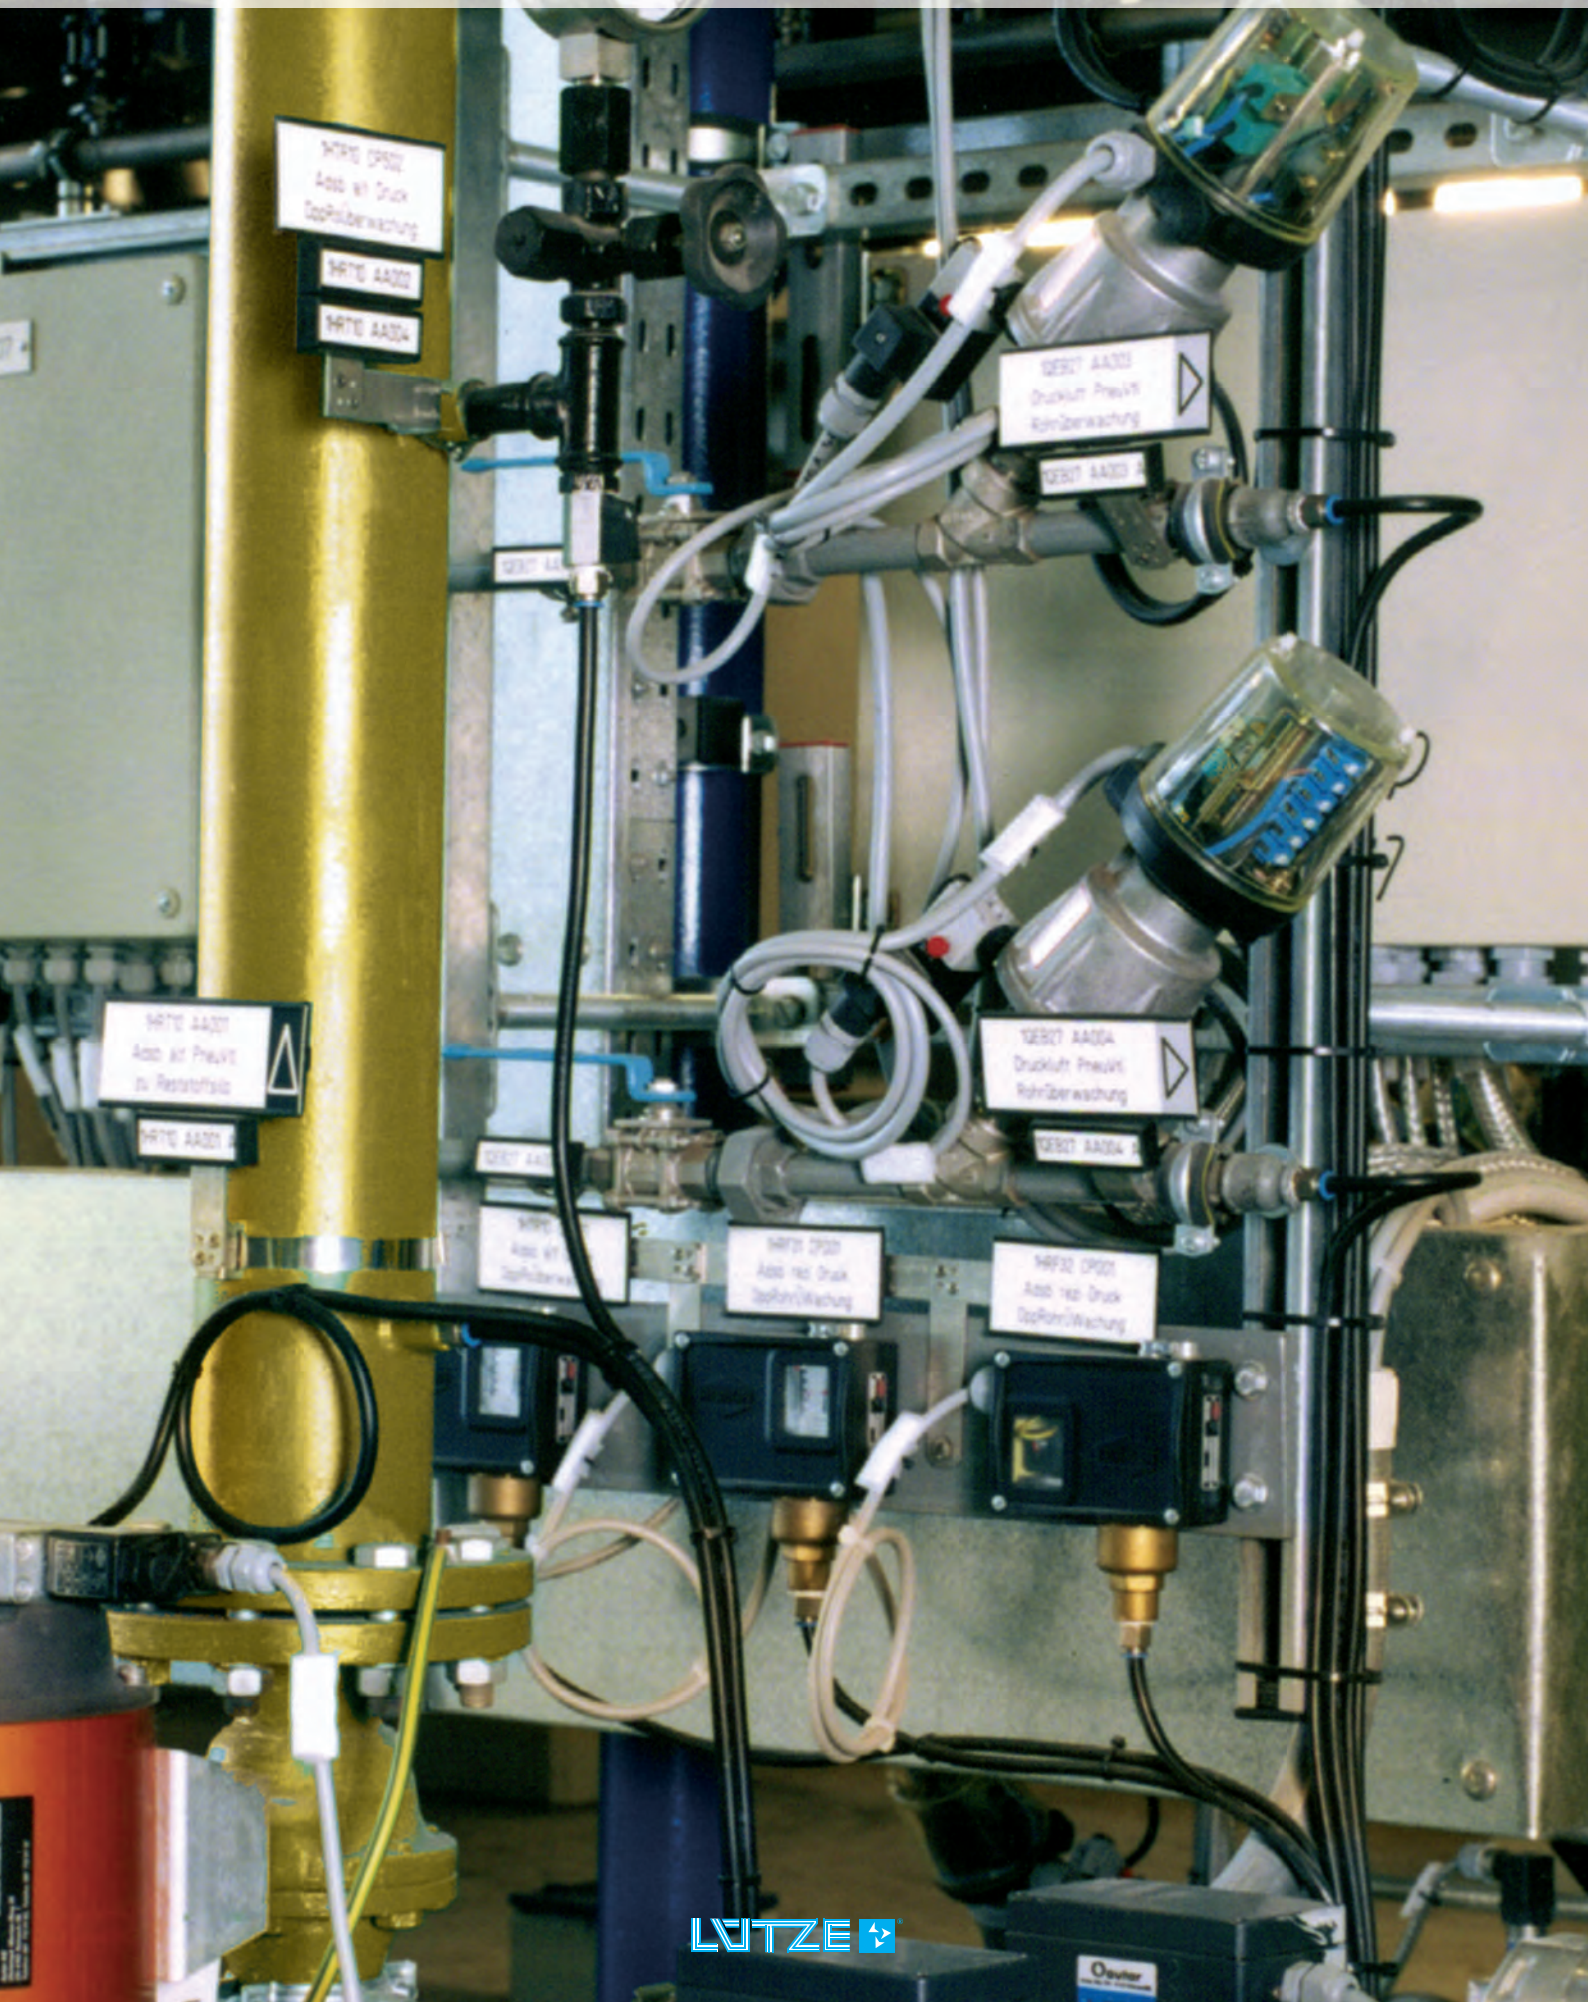

Control cables · Overview



No. 1



No. 2



No. 3



No. 4



No. 5



No. 6



No. 7



No. 8



No. 9



No. 10



No. 11



No. 12

LÜTZE SILFLEX®

Product	Construction						Characteristics					Application/usage					Approvals					Page	No.		
	Isolation	Labelling	Inner jacket	Shield	Outer jacket	Cross-sectional area	Oil resistant	Abrasion-proof	Flexible	Chemical resistant	Halogen free	Nominal voltage (V)	Application	Flexible	Continuous use with compulsory guide	Torsion	Mechanical conditions	Temperature range °C	UL/CSA recognized	UL listed	VDE/HAR			FDA	CNOMO
LÜTZE-SILFLEX® N PUR	TPE	No.	-	-	PUR	0,5-6	●	●	●	●	●	300/500	Control	●	-	-	medium	-25 +80						6.4	1
LÜTZE-SILFLEX® N (C) PUR	TPE	No.	-	●	PUR	0,5-6	●	●	●	●	●	300/500	Control	●	-	-	medium	-25 +80						6.5	2
LÜTZE-SILFLEX® PUR Orange	TPE	coloured	-	-	PUR	1,0-2,5	●	●	●	●	●	300/500	Handheld tool	●	-	-	high	-25 +80						6.6	3
LÜTZE-SILFLEX® N	PVC	No.	-	-	PVC	0,5-50	○	-	-	○	-	300/500	Control	●	-	-	low	-5 +70						6.7 6.8	4
LÜTZE-SILFLEX® B	PVC	coloured	-	-	PVC	0,5-6	○	-	-	○	-	300/500	Connecting cable	●	-	-	low	-5 +70						6.9	5
LÜTZE-SILFLEX® N (C) Y	PVC	No.	-	●	PVC	0,5-35	○	-	-	○	-	300/500	Control	●	-	-	low	-5 +70						6.10	6
LÜTZE-SILFLEX® N (C) Y TR	PVC	No.	PVC	●	PVC	0,75-16	○	-	-	○	-	300/500	Control	●	-	-	medium	-5 +70			●			6.11	7
LÜTZE-SILFLEX® N (C) Y VFD	PVC/Nylon	No.	-	●	PVC	AWG18 AWG10	○	-	-	○	-	600	Motor Frequency changer	●	-	-	medium	-25 +90	●	●				6.12	9
LÜTZE-SILFLEX® Tray ER	PVC/Nylon	No.	-	-	PVC	AWG18 AWG12	○	-	-	○	-	600	Control	●	-	-	medium	-25 +90	●	●				6.13	10
LÜTZE-SILFLEX® N (C) Y Tray ER	PVC/Nylon	No.	-	●	PVC	AWG18 AWG14	○	-	-	○	-	600	Control	●	-	-	medium	-25 +90	●	●				6.14	11
LÜTZE-SILFLEX® N S Y	PVC	No.	PVC	Steel	PVC	0,5-10	○	-	-	○	-	300/500	Control	○	-	-	high	-5 +70						6.15	8
LÜTZE-SILFLEX® ORC	PVC	No.	-	-	PVC	1,0-16	●	-	-	○	-	300/500	Control	●	-	-	low	-5 +70				●		6.16	12

● = suitable
○ = conditionally suitable

Control cables · Overview




No. 1



No. 2



No. 3



No. 4

LÜTZE SILFLEX®

Product	Construction						Characteristics						Application/usage					Approvals					Page	No.	
	Isolation	Labelling	Inner jacket	Shield	Outer jacket	Cross-sectional area	Oil resistant	Abrasion-proof	Flexible	Chemical resistant	Halogen free	Nominal voltage (V)	Application	Flexible	Continuous use with compulsory guide	Torsion	Mechanical conditions	Temperature range °C	UL/CSA recognized	UL listed	VDE/HAR	FDA			CNOMO
LÜTZE SILFLEX® EN	PVC	No.	-	-	PVC	0,75-1,5	○	-	-	○	-	300/500	for intrinsically safe electric circuits	●	-	-	low	-5 +70						6.17	1
LÜTZE SILFLEX® EN (C) Y	PVC	No.	-	●	PVC	0,75-1,5	○	-	-	○	-	300/500	for intrinsically safe electric circuits	●	-	-	low	-5 +70						6.17	2
LÜTZE SILFLEX® QUAD N	PVC	No.	-	●	PVC	0,5-2,5	○	-	-	○	-	300/500	Control	●	-	-	low	-5 +90	●	-	●			6.18	3
LÜTZE SILFLEX® QUAD N (C) Y	PVC	No.	-	●	PVC	0,75-2,5	○	-	-	○	-	300/500	Control	●	-	-	low	-5 +90	●	-	●			6.19	4

● = suitable

○ = conditionally suitable

PUR control cables - unshielded

LÜTZE-SILFLEX® N PUR



Application

- Machine and device construction, transport and conveyor technology
- For flexible application with free movement
- Especially for industrial environments, machines and plants
- In rooms with high concentrations of people or material assets

Properties

- Low capacitance, very good electrical properties
- Very good cold flexibility
- halogen-free, no corrosive gases
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene
- Free from silicone paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
Test voltage	
	3000 V
Insulation resistance	
	min. 100 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
	according to VDE 0298 table 6
Burning behaviour	
	Halogen-free according to DIN EN 20264-1; EN 50267-2-1, EN 60684-2

Design

- Bare copper braid, fine stranded according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special Thermoplast conductor insulation
- Conductors black with white number print according to DIN EN 50334
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
G = with green/yellow ground conductor; x = without ground conductor
- Conductors stranded layers
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
110437	2x0.5	4.5	2.6	1.0
110196	3G0.5	4.7	3.2	1.5
110457	4G0.5	5.1	4.0	1.9
110372	5G0.5	5.9	5.2	2.4
111016	7G0.5	6.4	6.6	3.4
111707	12G0.5	8.7	11.8	5.8
110644	18G0.5	10.4	17.2	8.6
110459	25G0.5	12.1	23.6	12.0
0.75 mm²				
110168	2x0.75	5.0	3.3	1.4
110197	3G0.75	5.3	4.2	2.2
110169	4G0.75	5.8	5.5	2.9
110991	5G0.75	6.4	6.7	3.6
110424	7G0.75	7.2	8.9	5.0
110506	12G0.75	9.5	15.4	8.6
110992	18G0.75	11.6	23.0	13.0
110526	25G0.75	13.5	31.6	18.0
1.0 mm²				
110443	2x1.0	5.2	3.9	2.0
110182	3G1.0	5.8	5.3	2.9
110418	4G1.0	6.3	6.6	3.8
110184	5G1.0	6.8	8.1	4.8
110185	7G1.0	7.7	10.8	6.7
110188	12G1.0	10.3	19.0	11.5
110189	18G1.0	12.3	27.9	17.3
110191	25G1.0	14.5	38.7	24.0
1.5 mm²				
110177	3G1.5	6.4	7.1	4.3
110186	4G1.5	7.1	9.3	5.8
110178	5G1.5	8.5	11.4	7.2
110179	7G1.5	8.7	15.1	10.1
110180	12G1.5	11.7	26.6	17.3
110181	18G1.5	14.0	39.0	25.9
110183	25G1.5	16.4	53.9	36.0
2.5 mm²				
111102	3G2.5	7.8	11.4	7.2
110192	4G2.5	8.7	14.7	9.6
110193	5G2.5	9.6	18.1	12.0
110194	7G2.5	10.7	24.1	16.8
4 – 6 mm²				
110195	4G4	10.5	22.4	15.4
110450	4G6	12.4	32.4	23.0

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PUR control cables - shielded

LÜTZE-SILFLEX[®] N (C)PUR, without inside jacket



Application

- Machine and device construction, transport and conveyor technology
- For flexible application with free movement
- Especially for industrial environments with high interference potential, in machines, plant and device construction
- In rooms with high concentrations of people or material assets

Properties

- High active and passive interference resistance
- Low capacitance, very good electrical properties
- Very good cold flexibility
- halogen-free, no corrosive gases
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene
- Free from silicone paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
Test voltage	3000 V
Insulation resistance	min. 100 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	according to VDE 0298 table 6
Burning behaviour	Halogen-free according to DIN EN 20264-1; EN 50267-2-1, EN 60684-2

Design

- Bare copper braid, fine stranded according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special Thermoplast conductor insulation
- Conductors black with white number print according to DIN EN 50334
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
- G = with green/yellow ground conductor; x = without ground conductor
- Conductors stranded layers
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
111651	(2x0.5)	5.2	3.8	2.3
111652	(3G0.5)	5.5	4.5	2.8
111653	(4G0.5)	5.9	6.0	3.7
111654	(5G0.5)	6.5	7.0	4.8
111656	(7G0.5)	7.2	9.1	5.6
111657	(12G0.5)	9.3	14.6	9.0
111658	(18G0.5)	11.0	20.6	12.4
111659	(25G0.5)	13.1	28.9	17.8
0.75 mm²				
111660	(2x0.75)	5.6	4.7	2.8
111661	(3G0.75)	6.0	6.0	3.9
111662	(4G0.75)	6.5	7.2	4.6
111663	(5G0.75)	7.2	9.2	5.8
111664	(7G0.75)	7.8	11.8	7.4
111665	(12G0.75)	10.3	18.4	11.9
111666	(18G0.75)	12.2	26.6	17.2
111667	(25G0.75)	14.5	37.2	24.6
1.0 mm²				
111668	(2x1.0)	6.0	5.7	3.7
111669	(3G1.0)	6.3	6.9	4.6
111670	(4G1.0)	6.8	8.8	6.1
111671	(5G1.0)	7.6	10.6	7.1
111672	(7G1.0)	8.2	13.5	9.5
111673	(12G1.0)	10.9	22.0	15.3
111674	(18G1.0)	13.3	33.5	23.1
111675	(25G1.0)	15.3	43.7	30.6
1.5 mm²				
111676	(2x1.5)	6.6	7.0	4.7
111677	(3G1.5)	7.0	9.4	6.6
111678	(4G1.5)	7.6	11.4	8.1
111679	(5G1.5)	8.6	14.4	10.0
111680	(7G1.5)	9.3	18.2	13.4
111681	(12G1.5)	12.3	29.6	21.5
111682	(18G1.5)	15.0	45.2	32.6
2.5 mm²				
111684	(3G2.5)	8.6	13.9	10.1
111685	(4G2.5)	9.3	17.6	12.9
111686	(5G2.5)	10.4	21.4	15.3
111687	(7G2.5)	11.5	27.8	20.5
111648	(12G2.5)	15.4	47.4	35.4
4 – 6 mm²				
111688	(4G4)	11.0	25.7	19.1
111690	(4G6)	13.4	38.3	28.9

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PUR Handheld tool and device cables

LÜTZE-SILFLEX® PUR ORANGE, coloured conductors



Application

- Handheld tools of all kinds such as drills, sanders, handsaws
- For flexible application with free movement
- Anywhere where an especially flexible cable is advantageous
- Orange outer jacket for locking circuits that remain under voltage after switching off of the main power circuit

Properties

- Abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

Voltage U_0/U	300/500 V
Test voltage	2000 V
Insulation resistance	min. 100 M Ω x km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	according to VDE 0298 table 6
Fire performance	Halogen-free according to DIN EN 20264-1; EN 50267-2-1, EN 60684-2

Design

- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special Thermoplast conductor insulation
- Conductors coloured according to DIN VDE 0293-308 (new)
- 2-wire: brown, blue
- 3-wire: greenyellow, brown, blue
- 4-wire: greenyellow, brown, black, grey
- 5-wire: greenyellow, blue, brown, black, grey
- Ground conductor greenyellow according to DIN EN 50334
- G = with greenyellow ground conductor; x = without ground conductor
- Conductors stranded layers
- Full polyurethane jacket
- Jacket colour orange RAL 2003

Part-No.	Number of strands/cross-section	Outer- \varnothing approx. mm	Weight kg/100 m	Cu-Index kg/100 m
1.0 mm²				
110199	3G1.0	5.8	5.4	2.9
110198	4G1.0	6.3	6.6	3.9
110144	5G1.0	6.8	8.1	4.8
1.5 mm²				
110171	3G1.5	6.4	7.2	4.3
110172	4G1.5	7.1	9.3	5.8
110173	5G1.5	7.8	11.4	7.2
2.5 mm²				
110329	3G2.5	7.8	10.4	7.2
110176	4G2.5	8.7	14.7	9.6
100866	5G2.5	9.6	18.2	12.0

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC control cables - unshielded

LÜTZE-SILFLEX® N



Application

- Machine and device construction, transport and conveyor technology, heating, climate technology
- In dry and moist rooms
- As control, measurement and regulation cable for medium operating conditions
- For flexible application without compulsory guide

Properties

- PVC flame-retardant, self-extinguishing
- Widely resistant to oils, greases, acids and bases
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
Test voltage	3000 V
Insulation resistance	min. 20 MΩ × km
Temperature range	
moving	-5 °C to +70 °C
fixed	-30 °C to +80 °C
Minimum bending radius	according to VDE 0298 table 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1
Special version	
K= cold resistant	-30 °C to +70 °C
T= heat resistant	0 °C to +90 °C

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special PVC conductor insulation
- Conductors black with white number print according to DIN EN 50334
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
G = with green/yellow ground conductor; x = without ground conductor
- Conductors stranded layers
- Jacket special PVC TM2 according to HD21.1, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
100363	2×0.5	5.0	3.5	1.0
100364	3G0.5	5.3	4.3	1.4
100365	4G0.5	5.8	5.2	1.9
100366	5G0.5	6.4	6.1	2.4
100215	7G0.5	7.0	7.5	3.4
100368	8G0.5	7.6	8.4	3.8
100369	10G0.5	8.7	10.5	4.8
100370	12G0.5	9.2	12.2	5.8
100371	14G0.5	9.8	14.1	6.7
100372	16G0.5	10.2	16.1	7.7
100373	18G0.5	11.0	18.0	8.6
100374	21G0.5	11.8	20.8	10.1
100358	25G0.5	13.3	25.3	12.0
100378	30G0.5	14.0	29.5	14.4
100379	36G0.5	15.0	35.0	17.3
100380	40G0.5	16.0	38.6	19.2
0.75 mm²				
100384	2×0.75	5.6	4.3	1.4
100385	3G0.75	5.8	5.6	2.2
100386	4G0.75	6.6	6.8	2.9
100387	5G0.75	6.9	8.0	3.6
100389	7G0.75	7.5	9.8	5.0
100391	10G0.75	9.6	14.0	7.2
100392	12G0.75	9.7	16.2	8.6
100388	14G0.75	10.8	18.8	10.1
100394	16G0.75	11.5	21.4	11.5
100395	18G0.75	12.0	24.1	13.0
101063	21G0.75	13.3	27.7	15.1
100398	25G0.75	14.0	33.8	18.0
100400	34G0.75	16.9	44.0	24.5
101312	41G0.75	18.0	54.8	29.5
1.0 mm²				
100405	2×1.0	5.9	5.0	1.9
100406	3G1.0	6.2	6.6	2.9
100407	4G1.0	6.7	8.0	3.8
100408	5G1.0	7.3	9.5	4.8
100410	7G1.0	8.2	11.9	6.7
100411	8G1.0	9.0	11.3	7.7
100413	12G1.0	10.6	20.0	11.5
100416	18G1.0	12.9	29.5	17.3
101085	21G1.0	14.0	34.1	20.2

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC control cables - unshielded

LÜTZE-SILFLEX® N



Application

- Machine and device construction, transport and conveyor technology, heating, climate technology
- In dry and moist rooms
- As control, measurement and regulation cable for medium operating conditions
- For flexible application without compulsory guide

Properties

- PVC flame-retardant, self-extinguishing
- Widely resistant to oils, greases, acids and bases
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
Test voltage	3000 V
Insulation resistance	min. 20 MΩ × km
Temperature range	
moving	-5 °C to +70 °C
fixed	-30 °C to +80 °C
Minimum bending radius	according to VDE 0298 table 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1
Special version	
K = cold resistant	-30 °C to +70 °C
T = heat resistant	0 °C to +90 °C

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special PVC conductor insulation
- Conductors black with white number print according to DIN EN 50334
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
G = with green/yellow ground conductor; x = without ground conductor
- Conductors stranded layers
- Jacket special PVC TM2 according to HD21.1, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
1.0 mm²				
100417	25G1.0	15.3	41.5	24.0
100419	34G1.0	17.5	54.6	32.6
100426	65G1.0	23.8	100.9	62.4
1.5 mm²				
100429	2x1.5	6.0	6.6	2.9
100430	3G1.5	7.0	8.6	4.3
100431	4G1.5	7.4	10.7	5.8
100432	5G1.5	8.3	12.7	7.2
100433	7G1.5	9.1	16.0	10.1
100437	12G1.5	11.7	27.6	17.3
100440	18G1.5	14.7	40.8	25.9
100443	25G1.5	16.9	57.4	36.0
2.5 mm²				
118389	2x2.5	7.7	9.9	4.8
100453	3G2.5	8.3	13.3	7.2
100454	4G2.5	9.1	16.6	9.6
100455	5G2.5	10.2	19.8	12.0
100456	7G2.5	11.3	25.7	16.8
100458	12G2.5	14.7	45.0	28.8
4 mm²				
100871	2x4	9.5	14.8	7.7
100990	3G4	10.2	21.1	11.6
100464	4G4	11.0	25.4	15.4
100465	5G4	12.3	30.9	19.2
6 mm²				
100468	4G6	12.7	35.8	17.3
100469	5G6	14.2	43.8	28.8
10 mm²				
100471	4G10	16.3	62.6	38.4
100475	5G10	18.2	76.5	48.0
16 mm²				
100473	4G16	20.1	95.0	61.4
100354	5G16	22.6	116.3	76.8
25 mm²				
100480	4G25	22.9	139.6	96.0
35 mm²				
100481	4G35	28.9	187.5	134.4
50 mm²				
108062	4G50	35.4	290.0	192.0

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC control cables - unshielded

LÜTZE-SILFLEX® B



Application

- Machine and device construction, transport and conveyor technology, heating, climate technology
- In dry and moist rooms
- As control, measurement and regulation cable for medium operating conditions
- For flexible application without compulsory guide

Properties

- PVC flame-retardant, self-extinguishing
- Widely resistant to oils, greases, acids and bases
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
Test voltage	3000 V
Insulation resistance	min. 20 MΩ × km
Temperature range	
moving	-5 °C to +70 °C
fixed	-30 °C to +80 °C
Minimum bending radius	according to VDE 0298 table 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1
Special version	
K= cold resistant	-30 °C to +70 °C
T= heat resistant	0 °C to +90 °C

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special PVC conductor insulation
- Conductors coloured according to DIN VDE 0293-308 (new)
- 2-wire: brown, blue
- 3-wire: greenyellow, brown, blue
- 4-wire: greenyellow, brown, black, grey
- 5-wire: greenyellow, blue, brown, black, grey
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
- G = with green/yellow ground conductor; x = without ground conductor
- Conductors stranded layers
- Jacket special PVC TM2 according to HD21.1, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
100013	2×0.5	5.0	3.5	1.0
100001	3G0.5	5.3	4.0	1.4
110921	3×0.5	5.3	4.0	1.4
100002	4G0.5	5.8	5.2	1.9
100003	5G0.5	6.4	6.1	2.4
0.75 mm²				
100024	2×0.75	5.6	4.3	1.4
100025	3G0.75	5.8	5.6	2.2
100012	3×0.75	5.8	5.6	2.2
100026	4G0.75	6.4	6.8	2.9
100027	5G0.75	6.9	8.0	3.6
1.0 mm²				
100050	2×1.0	5.9	5.0	1.9
100051	3G1.0	6.2	6.6	2.9
100983	3×1.0	6.2	6.6	2.9
100052	4G1.0	6.7	8.0	3.8
100053	5G1.0	7.3	9.5	4.8
1.5 mm²				
100078	2×1.5	6.0	6.6	2.9
100079	3G1.5	7.0	8.6	4.3
100080	4G1.5	7.4	10.7	5.8
100081	5G1.5	8.3	12.7	7.2
2.5 mm²				
100104	2×2.5	7.7	9.9	4.8
100105	3G2.5	8.3	13.3	7.2
100106	4G2.5	9.1	16.6	9.6
100107	5G2.5	10.2	19.8	12.0
4 mm²				
100118	4G4	11.0	25.4	15.4
100119	5G4	12.3	30.9	19.2
6 mm²				
100123	4G6	12.7	43.8	23.0
100124	5G6	14.2	56.9	28.8

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC control cable - shielded, without inside jacket

LÜTZE-SILFLEX® N (C) Y



Application

- Machine and device construction, transport and conveyor technology, heating, climate technology
- In dry and moist rooms
- As control, measurement and regulation cable for medium operating conditions
- For flexible application without compulsory guide
- Anywhere where electrical interference fields can influence the signal transmission

Properties

- The overall shield of braided copper wires prevents both the interference of signals and measured values as well as the radiation of interfering signals
- PVC Flame-retardant, self-extinguishing
- Widely resistant to oils, greases, acids and bases
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
Test voltage	3000 V
Insulation resistance	min. 20 MΩ × km
Temperature range	
moving	-5 °C to +70 °C
fixed	-25 °C to +70 °C
Minimum bending radius	according to VDE 0298 table 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1

Design


- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special PVC conductor insulation
- Conductors black with white number print according to DIN EN 50334
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
G = with green/yellow ground conductor; x = without ground conductor
- Conductors stranded layers
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Jacket special PVC TM2 according to HD21.1, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
116191	(2x0.5)	5.6	4.5	2.9
116139	(3G0.5)	6.2	6.3	4.5
116238	(5G0.5)	7.1	9.6	5.7
116235	(7G0.5)	7.8	13.6	6.9
116151	(12G0.5)	10.0	20.0	10.8
0.75 mm²				
116174	(2x0.75)	6.3	5.5	3.1
116100	(3G0.75)	6.5	7.0	4.6
116102	(4G0.75)	7.1	9.5	5.6
116103	(5G0.75)	7.7	13.0	7.0
116104	(7G0.75)	8.4	16.8	9.8
116105	(12G0.75)	11.0	23.2	14.8
116106	(18G0.75)	12.8	31.5	20.5
116107	(25G0.75)	15.1	43.0	26.0
1.0 mm²				
116234	(2x1.0)	6.6	8.4	5.1
116110	(3G1.0)	6.9	11.0	7.0
116112	(4G1.0)	7.4	13.0	8.0
116113	(5G1.0)	8.2	15.6	9.5
116114	(7G1.0)	8.9	19.2	12.0
116115	(12G1.0)	11.6	28.5	18.5
116116	(18G1.0)	14.0	39.5	24.5
116117	(25G1.0)	16.0	64.2	33.0
1.5 mm²				
116121	(3G1.5)	7.4	12.5	9.0
116123	(4G1.5)	8.3	16.5	11.0
116124	(5G1.5)	9.0	19.3	12.5
116125	(7G1.5)	10.0	24.5	15.9
116126	(12G1.5)	13.3	36.5	24.5
2.5 mm²				
116132	(3G2.5)	9.2	18.8	12.4
116133	(4G2.5)	10.0	23.6	15.0
116134	(5G2.5)	11.1	27.0	18.0
116135	(7G2.5)	12.0	34.0	23.5
4 – 35 mm²				
116150	(4G4)	11.8	30.2	22.0
116153	(4G6)	14.2	41.2	30.5
116156	(4G10)	17.2	72.0	51.7
116158	(4G16)	20.2	107.0	75.6
116159	(4G25)	24.9	152.1	114.6
116143	(4G35)	27.8	229.0	154.3

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC control cable - shielded, with inside jacket

LÜTZE-SILFLEX® N (C) Y TR

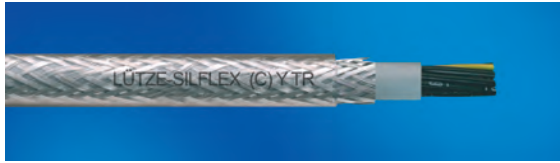

Application

- Machine and device construction, transport and conveyor technology, heating, climate technology
- In dry and moist rooms
- As control, measurement and regulation cable for medium operating conditions
- For flexible application without compulsory guide
- Anywhere where electrical interference fields can influence the signal transmission

Properties

- Particularly robust structure with inner jacket
- The overall shield of braided copper wires prevents both the interference of signals and measured values as well as the radiation of interfering signals
- PVC Flame-retardant, self-extinguishing
- Largely resistant to oils, greases, acids and bases
- Free from paint-wetting impairment substances (PWIS-free), RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
Test voltage	3000 V
Insulation resistance	min. 20 MΩ × km
Temperature range	
moving	-5 °C to +70 °C
fixed	-25 °C to +70 °C
Minimum bending radius	according to VDE 0298 table 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1
Approvals	VDE 0281.13 or HD 21.13

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special PVC conductor insulation
- Strands black with white number print according to DIN EN 50334 strands colour-coded VDE 0293 available on request
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
- G = with green/yellow ground conductor; x = without ground conductor
- Conductors stranded layers
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Jacket special PVC TM2 according to HD21.1, matt, adhesion-free surface
- Jacket colour transparent
- Inside jacket from special PVC, grey

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.75 mm²				
110570	(2x0,75)	7.4	4.8	4.6
116310	(3G0,75)	7.8	10.0	5.8
110571	(4G0,75)	8.4	11.5	6.4
116311	(5G0,75)	8.9	13.0	7.7
116324	(7G0,75)	9.7	16.1	10.2
110574	(10G0,75)	10.9	19.8	13.8
116325	(12G0,75)	12.3	24.7	17.7
110575	(18G0,75)	14.5	35.6	24.3
110576	(24G0,75)	16.5	45.5	30.0
110577	(34G0,75)	18.9	60.1	32.3
1.0 mm²				
116312	(2x1,0)	7.9	9.8	5.6
116313	(3G1,0)	8.2	11.1	6.5
116315	(4G1,0)	8.7	13.0	7.8
116316	(5G1,0)	9.5	15.3	8.9
1.5 mm²				
116317	(3G1,5)	8.9	13.6	8.3
116326	(4G1,5)	9.6	16.3	10.0
116330	(5G1,5)	10.3	18.8	12.5
116327	(7G1,5)	11.3	23.7	14.9
2.5 mm²				
116328	(4G2,5)	11.3	23.3	16.7
116318	(5G2,5)	12.6	28.3	20.0
116319	(7G2,5)	13.9	37.0	28.8
4 – 35 mm²				
116320	(4G4)	13.4	34.7	23.7
116329	(4G6)	15.8	48.5	31.8
116322	(4G10)	19.0	73.5	55.8
116323	(4G16)	22.2	139.5	80.5

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

Motor- and frequency converter cable - shielded

LÜTZE-SILFLEX® (C) VFD PVC 0.6/1kV



Application

- Shielded cable for frequency converters and motor applications, connection of motors and drives
- Designed for rough industrial environments and operating conditions with high disturbance levels
- Due to semiconducting layer particularly suitable for applications with voltage peaks and long cable routes
- Complies with **NFPA 79** for "machine tool wiring" (MTW)
- **TC-ER** for using in cable racks **without protective hose**, reduced material- and labour costs
- For tool machines, machines and plant engineering, heating and air conditioning technology, automatic assembly machines, production lines and other industrial uses.
- WTTC - "wind turbine tray cable" Approval for use in wind turbines

Properties

- Flexible construction with nylon cover for better lateral pressure resistance according to UL 1277 and simple installation
- Particularly round construction with small cable diameter
- Special jacket compound, oil resistant
- Semiconducting layer prevents early cable failure and reduces corona effects, therefore increased reliability and lifespan
- UV-resistant
- Suitable for direct installation in the ground as well
- UL-listing as type TC-Exposed Run
- Use in dry or damp environment
- Free from paint-wetting impairment substances (PWIS-free), RoHS-compliant

Special features:

- The dimensions shown are available ex stock
- Other dimensions available on request

Technical data

Nominal voltage	600 V UL TC 1000 V WTTC
Temperature range fixed	-40 °C to +90 °C
Minimum bending radius	min. D x 6
Approvals	UL Type TC-ER, UL/AWM/CSA/CE, UL MTW or DP-1, WTTC, Class 1, Div. 2 per NEC Art. 336, 392, 501, C(UL) TC and CIC FT4 UL 1277

Design

- Copper strand blank, finely stranded, conductor for better electr. properties and reduced oxidation.
- Isolation PVC/Nylon THHN - THWN with semi-conducting layer
- Conductors black with white number print according to DIN EN 50334
- Ground conductor
G = with greenyellow ground conductor; x = without ground conductor
- Shield from aluminium-laminated foil, and meshwork from tinned copper wires
- Oil resistant PVC jacket
- Jacket colour black

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
1.0 mm² - AWG 18 (19/30) CU blk.				
A1161804	4G1,0 (AWG18)	9.7	14.3	5.7
1.5 mm² - AWG 16 (26/30) CU blk.				
A1161604	4G1,5 (AWG16)	10.2	16.7	7.3
2.5 mm² - AWG 14 (41/30) CU blk.				
A1161404	4G2,5 (AWG14)	11.4	22.4	11.0
4 mm² - AWG 12 (65/30) CU blk.				
A1161204	4G4 (AWG12)	12.8	30.2	16.7
6 mm² - AWG 10 (105/30) CU blk.				
A1161004	4G6 (AWG10)	16.7	47.6	25.4

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

Tray cable with UL/TC-ER/WTTC/MTW/CSA approvals

LÜTZE-SILFLEX® Tray-ER PVC, unshielded



Application

- Control cable for laying in cable racks, with "exposed run" (open wiring) approval
- Complies with **NFPA 79** for "machine tool wiring" (MTW)
- TC-ER** for using in cable racks **without protective hose**, reduced material- and labour costs
- For tool machines, machines and plant engineering, heating and air conditioning technology, automatic assembly machines, production lines and other industrial uses.
- WTTC - "wind turbine tray cable" Approval for use in wind turbines

Properties

- Flexible construction with nylon cover for better lateral pressure resistance according to UL 1277 and simple installation
- Special jacket compound, oil resistant
- UV-resistant
- Suitable for direct installation in the ground as well
- UL-listing as type TC-Exposed Run
- Use in dry or damp environment
- Free from paint-wetting impairment substances (PWIS-free), RoHS-compliant

Special features:

- The dimensions shown are available ex stock
- Other dimensions available on request

Technical data

Nominal voltage	600 V UL TC 1000 V WTTC
Temperature range	
fixed	-40 °C to +90 °C
Minimum bending radius	min. D x 4
Approvals	UL Type TC-ER, UL/CSA/CE, UL AMW, Oil res I, UL 83, (UL) Typ MTW or DP-1, WTTC, Class 1; Div. 2 per NEC Art. 336, 392, 501, C(UL) TC and CIC FT4, UL1277, RoHS

Design

- Copper strand blank, finely stranded
- Isolation PVC/Nylon THHN - THWN
- Conductors black with white number print according to DIN EN 50334
- Ground conductor
G = with greenyellow ground conductor; x = without ground conductor
- Oil resistant PVC jacket
- Jacket colour black

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
1.0 mm² - AWG 18 (19/30) CU blk.				
A3221803	3G1,0 (AWG18)	7.5	8.5	2.7
A3221804	4G1,0 (AWG18)	8.1	9.8	3.6
A3221805	5G1,0 (AWG18)	8.8	11.4	4.5
A3221807	7G1,0 (AWG18)	9.5	14.9	6.2
A3221812	12G1,0 (AWG18)	12.1	25.4	10.7
1.5 mm² - AWG 16 (26/30) CU blk.				
A3221603	3G1,5 (AWG16)	8.1	10.3	3.6
A3221604	4G1,5 (AWG16)	8.7	12.3	4.8
A3221605	5G1,5 (AWG16)	9.5	14.6	5.9
A3221607	7G1,5 (AWG16)	10.2	18.9	8.5
2.5 mm² - AWG 14 (41/30) CU blk.				
A3221403	3G2,5 (AWG14)	8.8	12.9	5.7
A3221404	4G2,5 (AWG14)	9.6	15.9	7.6
4 mm² - AWG 12 (65/30) CU blk.				
A3221204	4G4 (AWG12)	11.1	22.6	12.3

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

Tray cable with UL/TC-ER/WTTC/MTW/CSA approvals

LÜTZE SILFLEX® (C) Tray-ER PVC, shielded



Application

- Shielded control cable for laying in cable racks, with "exposed run" (open wiring) approval
- Complies with **NFPA 79** for "machine tool wiring" (MTW)
- **TC-ER** for using in cable racks **without protective hose**, reduced material- and labour costs
- For tool machines, machines and plant engineering, heating and air conditioning technology, automatic assembly machines, production lines and other industrial uses.
- WTTC - "wind turbine tray cable" Approval for use in wind turbines

Properties

- Flexible construction with nylon cover for better lateral pressure resistance according to UL 1277 and simple installation
- UV-resistant
- Suitable for direct installation in the ground as well
- UL-listing as type TC-Exposed Run
- Use in dry or damp environment
- Free from paint-wetting impairment substances (PWIS-free), RoHS-compliant

Special features:

- The dimensions shown are available ex stock
- Other dimensions available on request
- Also see motor cables **A116** with **four-wire** construction, PVC-jacket, 0.6/1kV, shielded, optimized for frequency converters, TC-ER approval

Technical data

Nominal voltage	600 V UL TC 1000 V WTTC
Temperature range fixed	-40 °C to +90 °C
Minimum bending radius	min. D × 6
Approvals	UL Type TC-ER, UL/CSA/CE, UL AMW, Oil res I, UL 83, (UL) Typ MTW or DP-1, WTTC, Class 1; Div. 2 per NEC Art. 336, 392, 501, C(UL) TC and CIC FT4, UL1277, RoHS

Design

- Copper strand blank, finely stranded
- Isolation PVC/Nylon THHN - THWN
- Conductors black with white number print according to DIN EN 50334
- Ground conductor
G = with greenyellow ground conductor; x = without ground conductor
- Shield from aluminium-laminated foil, and meshwork from tinned copper wires
- Oil resistant PVC jacket
- Jacket colour black

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
1.0 mm² - AWG 18 (19/30) CU blk.				
A3211803	3G1,0 (AWG18)	7.9	10.1	4.5
A3211805	5G1,0 (AWG18)	9.1	14.0	6.5
A3211807	7G1,0 (AWG18)	10.0	17.7	8.6
1.5 mm² - AWG 16 (26/30) CU blk.				
A3211603	3G1,5 (AWG16)	8.8	12.9	5.8
A3211605	5G1,5 (AWG16)	10.2	17.2	8.5
2.5 mm² - AWG 14 (41/30) CU blk.				
A3211405	5G2,5 (AWG14)	11.1	22.7	12.6

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC control cables - with steel braid

LÜTZE-SILFLEX® NSY



Application

- Machine and device construction, transport and conveyor technology, heating, climate technology
- In dry and moist rooms
- As control, measurement and regulation cable for medium operating conditions
- For the hardest operating conditions
- For flexible application without compulsory guide

Properties

- High mechanical protection through galvanised steel braid and PVC inside jacket
- PVC Flame-retardant, self-extinguishing
- outer jacket transparent special PVC
- Widely resistant to oils, greases, acids and bases
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Voltage	300/500 V
U ₀ /U	
Test voltage	3000 V
Insulation resistance	min. 20 MΩ × km
Temperature range	
moving	-5 °C to +70 °C
fixed	-30 °C to +80 °C
Minimum bending radius	according to VDE 0298 table 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special PVC conductor insulation
- Conductors black with white number print according to DIN EN 50334
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
G = with green/yellow ground conductor; x = without ground conductor
- Conductors stranded layers
- Inside jacket PVC
- Hot-dipped galvanised steel wire braid, optical covering ≥ 65 %.
- Jacket special-PVC **transparent**

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
100573	3G0.5	7.9	13.4	1.4
100574	4G0.5	9.0	14.0	1.9
100575	5G0.5	9.7	15.6	2.4
101327	7G0.5	10.7	18.0	3.4
100600	12G0.5	12.3	27.5	5.8
100581	18G0.5	15.0	35.0	8.6
108025	25G0.5	17.3	30.0	12.0
0.75 mm²				
100588	2×0.75	8.2	12.9	1.4
100589	3G0.75	8.5	14.0	2.2
100590	4G0.75	9.5	16.2	2.9
100591	5G0.75	10.1	16.8	3.6
100592	7G0.75	11.2	19.7	5.0
100602	12G0.75	14.0	30.0	8.6
100597	18G0.75	15.5	39.8	13.0
100537	25G0.75	18.2	50.0	18.0
1.0 mm²				
100605	2×1.0	9.8	17.0	1.9
100606	3G1.0	10.1	18.7	2.9
100607	4G1.0	10.8	19.6	3.8
100608	5G1.0	11.6	23.0	4.8
100611	7G1.0	12.4	27.0	6.7
100616	12G1.0	15.1	38.0	11.5
100618	18G1.0	17.3	50.6	17.3
100619	25G1.0	20.0	62.0	24.0
1.5 mm²				
100610	2×1.5	10.2	18.0	2.9
100625	3G1.5	10.6	19.5	4.3
100626	4G1.5	11.3	21.0	5.8
100627	5G1.5	12.2	24.7	7.2
100628	7G1.5	13.0	31.3	10.1
100630	12G1.5	15.9	45.6	17.3
100632	18G1.5	20.0	65.0	25.9
100633	25G1.5	25.5	93.1	36.0
2.5 mm²				
100638	3G2.5	12.7	25.6	7.2
100637	4G2.5	13.6	30.3	9.6
100639	5G2.5	14.7	34.3	12.0
100640	7G2.5	15.8	42.6	16.8
100642	12G2.5	20.5	79.0	28.8
4 – 10 mm²				
100648	4G4	16.1	41.5	15.4
100650	5G4	17.5	48.3	19.2
100646	7G4	21.5	70.0	26.9
100652	4G6	18.4	60.0	23.4
100653	5G6	20.0	65.1	28.8
100649	7G6	22.5	85.0	40.3
100654	4G10	22.3	100.0	38.4
100655	5G10	25.5	107.0	48.0

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC control cable

LÜTZE-SILFLEX® ORC



CNOMO

Application

- Machine tools, transfer lines as well as other areas in the French automobile industry
- As monitoring, measurement and control cable
- For flexible application without compulsory guide
- Approved by the French automobile industry for use in conjunction with cutting and cooling oils

Properties

- Isolation and jacket material especially oil-stabilised according to the French automobile industry norm (CNOMO)
- Largely resistant to oils, greases, acids and bases
- PVC Flame-retardant, self-extinguishing
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
Test voltage	3000 V
Insulation resistance	min. 20 MΩ × km
Temperature range	
moving	-5 °C to +70 °C
fixed	-25 °C to +70 °C
Minimum bending radius	according to VDE 0298 table 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special PVC conductor insulation according to HD 21.1 T11
- Black conductors with white number print according to DIN EN 50334
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
G = with green/yellow ground conductor; x = without ground conductor
- Conductors stranded layers
- Jacket special PVC according to CNOMO and HD 21.1 TM5, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
1.0 mm²				
101130	2×1.0	5.5	4.9	1.9
101098	3G1.0	6.1	6.4	2.9
101099	4G1.0	6.6	7.9	3.8
101100	5G1.0	7.2	9.5	4.8
101101	7G1.0	8.0	12.3	6.7
101102	12G1.0	10.7	21.7	11.5
101131	18G1.0	12.7	31.1	17.3
101104	27G1.0	15.7	47.5	25.9
101233	36G1.0	18.8	64.0	34.6
101236	48G1.0	21.3	96.0	46.1
1.5 mm²				
101135	2×1.5	6.3	6.8	2.9
101136	3G1.5	6.7	8.4	4.3
101137	4G1.5	7.5	10.8	5.8
101138	5G1.5	8.2	13.1	7.2
101139	7G1.5	9.1	17.1	10.1
101140	12G1.5	12.1	29.8	17.3
101141	18G1.5	14.4	43.3	25.9
101144	27G1.5	22.1	65.5	38.9
2.5 – 16 mm²				
101147	3G2.5	8.2	13.2	7.2
101148	4G2.5	9.1	16.7	9.6
101253	5G2.5	10.0	20.5	12.0
101226	7G2.5	11.1	26.8	16.8
101149	4G4	10.9	25.1	15.3
101151	4G6	12.8	36.0	23.0
108047	4G10	16.3	59.1	38.4
100921	4G16	18.8	86.4	61.4

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC control cables intrinsically safe

LÜTZE-SILFLEX® EN LÜTZE-SILFLEX® EN (C) Y



Application

- Control, monitoring and instrumentation cable in intrinsically safe electric circuits (according to DIN VDE 0165 T.1)
- For explosive areas with ignition type(EX) -I-
- Painting and drying systems, machine and plant construction
- In dry and moist rooms

Properties

- PVC flame-retardant, self-extinguishing
- Widely resistant to oils, greases, acids and bases
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
Test voltage	3000 V
Insulation resistance	min. 20 MΩ × km
Operating capacity (unshielded) at 800 Hz	
Strand/Strand	approx. 110 pF/m
Operating capacity (shielded) at 800 Hz	
Strand/Strand	approx. 130 pF/m
Strand/Shield	approx. 185 pF/m
(pF/m at 800 Hz)	
Inductance	approx. 0.65 mH/km
Temperature range	
moving	-5 °C to +70 °C
fixed	-30 °C to +80 °C
Minimum bending radius	according to VDE 0298 table 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1

Design


- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special PVC conductor insulation
- Black conductors with white number print according to DIN EN 50334
- Conductors stranded layers
- Shielded design: meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Jacket special PVC TM2 according to HD21.1, matt, adhesion-free surface
- Jacket colour blue RAL 5015

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
unshielded - jacket colour blue				
100751	2×0.75	5.6	5.4	1.4
100754	3×0.75	5.9	6.6	2.2
100758	4×0.75	6.4	7.8	2.9
100760	5×0.75	6.9	10.0	3.6
110762	18×0.75	12.0	27.6	13.0
100753	2×1.0	5.9	6.0	1.9
101449	3×1.0	6.3	8.2	2.9
100755	4×1.0	6.7	10.6	3.8
100756	2×1.5	6.8	8.4	2.9
100757	3×1.5	6.9	10.2	4.3
100759	5×1.5	8.3	14.5	7.2
100704	7×1.5	9.1	17.1	10.1
shielded - jacket colour blue				
100711	(2×0.75)	6.3	5.6	4.0
100747	(3×0.75)	6.6	7.0	5.1
100713	(4×0.75)	7.1	9.5	6.2
100715	(8×0.75)	9.0	17.3	12.0
100716	(2×1.0)	6.6	8.4	6.0
100714	(3×1.0)	6.9	11.0	7.0
100717	(4×1.0)	7.4	13.0	9.0
108059	(12×1.0)	11.6	28.5	17.3
100719	(2×1.5)	7.2	9.7	7.4
100256	(3×1.5)	7.8	12.0	9.0
100720	(4×1.5)	8.3	16.5	11.6

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC control cables - unshielded

LÜTZE-SILFLEX® QUAD N (H05VV5-F)

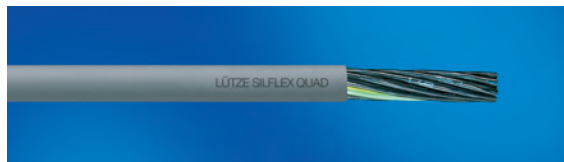

Application

- Machine and device construction, assembly lines, production lines, linking of control devices to conveyor systems
- These cables are especially suited for systems that are intended for export. Through the <HAR> UL CSA approval, these cables can be used virtually worldwide.
- The especially oil-resistant and flame-retardant PVC Jacket enables the use even under difficult conditions.

Properties

- PVC Flame-retardant, self-extinguishing
- Outer jacket special-PVC TM5 according to HD 21.1
- Largely resistant to oils, greases, acids and bases
- Oil resistant according to HD 21.1, UL, CSA
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
UL/CSA	600 V
Test voltage	
	3000 V
Insulation resistance	
	min. 20 MΩ × km
Temperature range <HAR>	
moving	-5 °C to +70 °C
fixed	-40 °C to +70 °C
Temperature range UL/CSA	
moving	-5 °C to +90 °C
fixed	-40 °C to +90 °C
Minimum bending radius	
	according to VDE 0298 table 6
Burning behaviour	
	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1
Approbations	
	H05VV5-F <HAR> HD21.13 UL-Style 2587 90 °C/600V CSA AWM I

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special PVC conductor insulation TI2 according to HD 21.1
- Black conductors with white number print according to DIN EN 50334
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
G = with green/yellow ground conductor; x = without ground conductor
- Conductors stranded layers
- Jacket special PVC TM5 according to HD21.1, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
108349	2×0.5	5.7	4.4	1.0
108350	3G0.5	6.1	5.5	1.4
108351	4G0.5	6.7	6.6	1.9
108352	5G0.5	7.5	8.3	2.4
108353	7G0.5	9.3	12.6	3.4
108354	12G0.5	10.9	18.2	5.8
108355	18G0.5	13.0	25.6	8.6
108356	25G0.5	15.2	35.8	12.0
0.75 mm²				
108401	2×0.75	6.1	5.6	1.5
108357	3G0.75	6.6	6.6	2.1
108358	4G0.75	7.3	8.1	2.9
108359	5G0.75	8.1	10.1	3.6
108360	7G0.75	8.9	15.4	5.0
108361	12G0.75	11.9	23.0	8.6
108362	18G0.75	14.2	32.4	13.0
108363	25G0.75	16.5	45.2	18.0
1.0 mm²				
108410	2×1.0	6.5	6.4	1.9
108364	3G1.0	6.9	7.7	2.9
108365	4G1.0	7.7	9.5	3.8
108366	5G1.0	8.5	11.7	4.8
108367	7G1.0	9.4	18.3	6.7
108368	12G1.0	12.6	26.8	11.5
108369	18G1.0	15.0	38.6	17.3
108370	25G1.0	17.5	53.7	24.0
1.5 mm²				
108391	2×1.5	7.6	9.1	2.9
108372	3G1.5	8.2	11.0	4.3
108373	4G1.5	9.1	13.9	5.8
108374	5G1.5	10.1	16.7	7.2
108375	7G1.5	11.1	26.0	10.1
108376	12G1.5	14.9	39.0	17.3
2.5 mm²				
108380	3G2.5	9.7	16.2	7.2
108381	4G2.5	10.7	20.5	9.6
108382	5G2.5	12.0	25.3	12.0
108383	7G2.5	13.2	38.9	16.8

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC control cables - shielded

LÜTZE-SILFLEX® QUAD N (C)Y (H05VV5-K)



Application

- Machine and device construction, assembly lines, production lines, linking of control devices to conveyor systems
- These cables are especially suited for systems that are intended for export. Through the <HAR> UL CSA approval, these cables can be used virtually worldwide.
- The especially oil-resistant and flame-retardant PVC Jacket enables use even under difficult conditions.
- Especially for industrial environments with high interference potential, in machine, plant and device construction

Properties

- The overall shield of braided copper wires prevents both the interference of signals and measured values as well as the radiation of interfering signals.
- PVC Flame-retardant, self-extinguishing
- Outer jacket special-PVC TM5 according to HD 21.1
- Largely resistant to oils, greases, acids and bases
- Oil resistant according to HD 21.1, UL, CSA
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

Voltage

U_0/U 300/500 V

UL/CSA 600 V

Test voltage

3000 V

Insulation resistance

min. 20 MΩ x km

Temperature range <HAR>

moving -5 °C to +70 °C

fixed -40 °C to +70 °C

Temperature range UL/CSA

moving -5 °C to +90 °C

fixed -40 °C to +90 °C

Minimum bending radius

according to VDE 0298 table 6

Burning behaviour

Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1

Approbations

H05VV5-F <HAR> HD21.13
UL-Style 2587 90 °C/600V
CSA AWM I

Design

- Bare copper braid, superfine strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special PVC conductor insulation TI2 according to HD 21.1
- Black conductors with white number print according to DIN EN 50334
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
G = with green/yellow ground conductor; x = without ground conductor
- Conductors stranded layers
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- PVC inside jacket
- Jacket special PVC TM5 according to HD21.1, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.75 mm²				
109582	(3G0.75)	8.8	12.5	5.2
109583	(4G0.75)	9.6	14.7	5.7
109584	(5G0.75)	10.3	17.2	6.9
109585	(7G0.75)	12.2	23.5	9.3
109587	(12G0.75)	14.5	35.4	16.2
1.0 mm²				
109568	(3G1.0)	9.3	14.1	6.3
109569	(4G1.0)	9.9	16.5	7.5
109570	(5G1.0)	10.9	19.5	8.8
109581	(7G1.0)	12.9	27.2	12.3
109571	(12G1.0)	15.4	40.5	18.9
1.5 mm²				
109572	(3G1.5)	10.4	18.0	8.0
109573	(4G1.5)	11.3	21.7	8.9
109574	(5G1.5)	12.6	26.7	10.9
109575	(7G1.5)	14.9	37.9	13.5
109576	(12G1.5)	17.6	53.8	32.2
2.5 mm²				
109577	(3G2.5)	12.0	24.6	10.9
109578	(4G2.5)	13.3	31.7	13.0
109579	(5G2.5)	14.6	38.3	18.3
109580	(7G2.5)	17.3	52.3	22.7

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

7. Electronic cables



Halogen free Electronic cables · Overview



No. 1



No. 2



No. 3



No. 4

LÜTZE HALOGENFLEX

Product	Construction						Characteristics						Application/usage						Approvals					Page	No.
	Isolation	Labelling	Inner jacket	Shield	Outer jacket	Cross-sectional area	Oil resistant	Abrasion-proof	Flexible	Chemical resistant	Halogen free	Nominal voltage (V)	Application	Flexible	Continuous use with compulsory guide	Torsion	Mechanical conditions	Temperature range °C	UL/CSA recognized	UL listed	VDE/HAR	FDA	CNOMO		
LÜTZE HALOGENFLEX D (C) PUR	TPE	coloured	-	●	PUR	0,14-0,75	●	●	●	●	●	300	Elektronik-cable	●	-	-	medium	-25 +70						7.4	1
LÜTZE HALOGENFLEX D (C) PUR TP	TPE	coloured	-	●	PUR	0,14-0,75	●	●	●	●	●	300	Data cable	●	-	-	medium	-25 +80						7.5	2
LÜTZE HALOGENFLEX Plus LIH (C) H	HI2	coloured	-	●	HM2	0,14-0,75	-	-	-	-	●	300	Elektronik-cable	●	-	-	low	-25 +70						7.6	3
LÜTZE HALOGENFLEX Plus LIH (C) H TP	HI2	coloured	-	●	HM2	0,14-0,75	-	-	-	-	●	300	Data cable	●	-	-	low	-25 +70						7.7	4

● = suitable

○ = conditionally suitable


Electronic cables · Overview



No. 1



No. 2



No. 3



No. 4



No. 5



No. 6



No. 7

LÜTZE ELECTRONIC


Product	Construction						Characteristics						Application/usage					Approvals					Page	No.	
	Isolation	Labelling	Inner jacket	Shield	Outer jacket	Cross-sectional area	Oil resistant	Abrasion-proof	Flexible	Chemical resistant	Halogen free	Nominal voltage (V)	Application	Flexible	Continuous use with compulsory guide	Torsion	Mechanical conditions	Temperature range °C	UL/CSA recognized	UL listed	VDE/HAR	FDA			CNOMO
LÜTZE ELECTRONIC LI YY AWG	PVC	coloured	-	-	PVC	AWG26 AWG20	○	-	-	○	-	300	Elektronik-cable	●	-	-	low	-15 +80	●					7.8	1
LÜTZE ELECTRONIC LI Y (C) Y AWG	PVC	coloured	-	●	PVC	AWG26 AWG20	○	-	-	○	-	300	Elektronik-cable	●	-	-	low	-15 +80	●					7.9	2
LÜTZE ELECTRONIC LI YY	PVC	coloured	-	-	PVC	0,14-0,75	○	-	-	○	-	300(500)	Elektronik-cable	●	-	-	low	-5 +70						7.10	3
LÜTZE ELECTRONIC LI Y (C) Y	PVC	coloured	-	●	PVC	0,14-1,0	○	-	-	○	-	300(500)	Elektronik-cable	●	-	-	low	-5 +70						7.11 7.12	5
LÜTZE ELECTRONIC LI Y (C) Y TP	PVC	coloured	-	●	PVC	0,14-0,75	○	-	-	○	-	300(500)	Data cable	●	-	-	low	-5 +70						7.13	6
LÜTZE ELECTRONIC PUR AS	TPE	coloured	-	●	PUR	0,25-0,75	●	●	●	●	●	300(500)	Actuator sensor	●	-	-	medium	-5 +70	●					7.14	7

● = suitable

○ = conditionally suitable

Halogen free electronic cables - shielded

HALOGENFLEX D(C)PUR

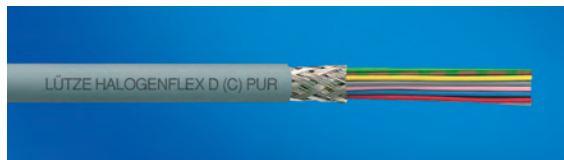

Application

- Ideal for all application locations in which the release of halogens in the event of fire is to be avoided, above all in rooms and public buildings with high concentrations of people as well as machine and device construction, transport and conveyor technology, heating, climate technology
- For trouble-free transmission in all areas of electronics, measuring, control and regulation technology
- Connection and data cable for signal, measurement and data transmission for telephone and voice transmission
- In dry and moist rooms
- As control, measurement and regulation cable medium operating conditions
- For flexible application without compulsory guide

Properties

- Environmentally friendly halogen-free cable
- Halogen-free conductors prevent poisonous and corrosive fire gases from damaging property and causing injury to people
- Very good shielding attenuation
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Rated voltage	300
Test voltage	1200 V
Insulation resistance	min. 20 MΩ x km
Temperature range	
moving	-25 °C to +70 °C
fixed	-40 °C to +70 °C
Minimum bending radius	
moving	D x 12
fixed	D x 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; IEC 60332-1
Halogen-free	according to VDE 0482 T. 267-2-1; EN 50267-2-1; IEC 60754-1
Corrosiveness of smoke emissions	according to VDE 0482 T. 267-2-2; EN 50267-2-2; IEC 60754-2

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special-TPE conductor insulation
- Conductors colour-coded according to DIN 47100
- Conductors stranded layers
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour grey RAL 7001 or 7032

Part-No.	Number of strands/cross-section	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.14 mm²				
113780	(2x0.14)	3.9	2.0	0.7
113781	(3x0.14)	4.1	2.4	1.2
113782	(4x0.14)	4.6	2.7	1.4
113783	(5x0.14)	4.9	3.2	1.6
113784	(7x0.14)	5.2	3.9	2.0
113785	(10x0.14)	6.5	5.5	3.3
113786	(12x0.14)	6.7	6.0	3.0
113787	(18x0.14)	7.6	8.8	5.0
113788	(25x0.14)	9.1	11.3	6.3
0.25 mm²				
113791	(3x0.25)	4.7	2.9	1.8
113792	(4x0.25)	4.8	3.4	2.2
113793	(5x0.25)	5.6	4.3	2.5
113794	(7x0.25)	6.0	5.1	3.0
113795	(10x0.25)	7.4	8.0	5.0
113796	(12x0.25)	7.6	9.4	5.0
113797	(18x0.25)	8.8	12.7	7.8
113798	(25x0.25)	10.2	16.5	9.2
0.34 mm²				
113801	(3x0.34)	5.3	3.9	2.0
113802	(4x0.34)	5.3	4.7	2.4
113803	(5x0.34)	6.4	5.8	2.9
113804	(7x0.34)	6.9	7.7	4.4
113805	(10x0.34)	8.4	11.2	6.0
113806	(12x0.34)	8.7	11.8	6.5
113807	(18x0.34)	10.1	17.1	9.5
113808	(25x0.34)	12.3	22.7	14.2
0.5 mm²				
113810	(2x0.5)	5.2	3.6	1.9
113811	(3x0.5)	5.5	4.6	2.5
113812	(4x0.5)	5.9	6.2	3.7
113813	(5x0.5)	6.3	7.6	4.4
113814	(7x0.5)	7.3	9.9	5.8
113815	(10x0.5)	8.8	12.2	7.6
113816	(12x0.5)	9.2	14.1	8.8
113817	(18x0.5)	10.5	21.0	12.1
113818	(25x0.5)	13.0	28.4	18.8
0.75 mm²				
113820	(2x0.75)	5.8	4.7	2.5
113821	(3x0.75)	6.1	5.2	3.7
113822	(4x0.75)	6.8	7.8	4.9
113823	(5x0.75)	7.1	9.0	5.8
113824	(7x0.75)	8.0	12.0	7.8
113825	(10x0.75)	10.0	17.6	12.3
113826	(12x0.75)	10.2	19.7	11.9
113827	(18x0.75)	11.8	20.3	16.8

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

Halogen free electronic cables- stranded pairs, shielded

HALOGENFLEX D (C)PUR TP



Application

- Ideal for all application locations in which the release of halogens in the event of fire is to be avoided, above all in rooms and public buildings with high concentrations of people as well as machine and device construction, transport and conveyor technology, heating, climate technology
- In dry and moist rooms
- For trouble-free transmission in all areas of electronics, measuring, control and regulation technology
- As control, measurement and control cable for medium operating conditions
- For flexible use without compulsory guide

Properties

- Environmentally friendly, halogen-free data cable
- High active and passive interference resistance
- High crosstalk attenuation through paired stranding
- Low capacitance, very good electrical properties
- Very good cold flexibility
- Halogen-free, no corrosive gases
- Low adhesion, abrasion-proof, nick-resistant, tear-propagation-resistant, hydrolysis-resistant, microbe-resistant, and rot-resistant
- Widely resistant to acids and bases (see tech. information)
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Rated voltage	300
Test voltage	3000 V
Insulation resistance	min. 20 MΩ × km
Temperature range	
moving	-15 °C to +80 °C
fixed	-40 °C to +80 °C
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; IEC 60332-1
Halogen-free	Halogen-free according to VDE 0482 T. 267-2-1; EN 50267-2-1; IEC 60754-1
Corrosiveness of smoke emissions	according to VDE 0482 T. 267-2-2; EN 50267-2-2; IEC 60754-2

Design


- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special-TPE conductor insulation
- Conductors colour-coded according to DIN 47100
- Conductors stranded pairs
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.14 mm²				
113860	(2×2×0.14)	5.5	3.8	2.1
113861	(3×2×0.14)	5.8	4.8	2.5
113862	(4×2×0.14)	6.2	5.4	2.4
113863	(6×2×0.14)	7.3	5.6	3.8
113864	(7×2×0.14)	7.5	9.5	5.3
113865	(12×2×0.14)	9.3	13.7	7.8
0.25 mm²				
113868	(2×2×0.25)	6.0	4.5	2.6
113869	(3×2×0.25)	6.8	6.9	4.1
113870	(4×2×0.25)	7.0	8.3	5.0
113871	(6×2×0.25)	8.0	11.5	6.5
113872	(7×2×0.25)	8.5	11.9	7.0
113873	(12×2×0.25)	10.6	17.6	10.7
113874	(15×2×0.25)	11.8	21.3	12.3
0.34 mm²				
113876	(2×2×0.34)	6.9	6.9	4.2
113877	(3×2×0.34)	7.4	8.4	4.0
113878	(4×2×0.34)	8.0	9.4	5.2
113879	(6×2×0.34)	9.4	14.9	8.4
113880	(7×2×0.34)	10.0	15.4	9.1
113881	(12×2×0.34)	12.5	24.5	13.9
0.5 mm²				
113884	(2×2×0.5)	7.3	7.1	4.1
113885	(3×2×0.5)	7.9	9.2	5.3
113886	(4×2×0.5)	9.0	12.5	6.6
113887	(6×2×0.5)	10.5	17.8	10.7
113888	(7×2×0.5)	11.2	18.6	11.7
113889	(12×2×0.5)	14.5	33.2	20.3
0.75 mm²				
113892	(2×2×0.75)	8.0	10.5	6.4
113893	(3×2×0.75)	8.6	13.8	7.0
113894	(4×2×0.75)	10.0	16.8	10.6
113895	(6×2×0.75)	12.0	23.7	13.8
113896	(7×2×0.75)	12.5	25.4	16.0
113897	(12×2×0.75)	15.8	43.3	24.2

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

Halogen free electronic cables - shielded

HALOGENFLEX LIH (C) H-D

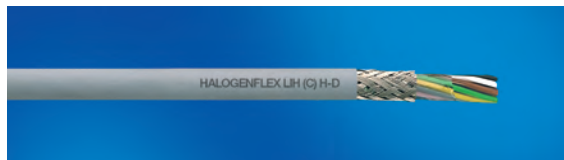

Application

- Ideal for all application locations in which the release of halogens in the event of fire is to be avoided, above all in rooms and public buildings with high concentrations of people
- For trouble-free transmission in all areas of electronics, measuring, control and regulation technology
- Connection and data cable for signal, measurement and data transmission for telephone and voice transmission.
- In dry and moist rooms
- As control, measurement and regulation cable medium operating conditions
- For flexible application without compulsory guide

Properties

- Environmentally friendly halogen-free cable
- Halogen-free conductors prevent poisonous and corrosive fire gases from damaging property and causing injury to people
- Very good shielding attenuation
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Rated voltage	300
Test voltage	1200 V
Insulation resistance	min. 20 MΩ × km
Temperature range	
moving	-25 °C to +70 °C
fixed	-40 °C to +70 °C
Minimum bending radius	
moving	D × 15
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; IEC 60332-1
Halogen-free	according to VDE 0482 T. 267-2-1; EN 50267-2-1; IEC 60754-1
Corrosiveness of smoke emissions	according to VDE 0482 T. 267-2-2; EN 50267-2-2; IEC 60754-2
Smoke density	VDE 0482 section 268-2; EN 50268-2;

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special conductor insulation HI2 according to VDE 0207 T. 23
- Conductors colour-coded according to DIN 47100
- Conductors stranded layers
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Outer jacket Flame-retardant, halogen-free special thermoplast HM2 according to VDE 0207 T. 24
- Jacket colour grey RAL 7001 or 7032

Part-No.	Number of strands/cross-section	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.14 mm²				
103681	(3×0.14)	4.0	2.4	1.2
103682	(4×0.14)	4.2	2.8	1.4
103683	(5×0.14)	4.9	3.3	1.7
103684	(7×0.14)	4.9	3.9	2.0
103685	(10×0.14)	5.8	5.3	3.4
103686	(12×0.14)	6.6	7.1	3.7
103687	(18×0.14)	7.6	9.4	4.9
103688	(25×0.14)	9.1	12.7	6.3
0.25 mm²				
103690	(3×0.25)	4.7	3.3	1.7
103691	(4×0.25)	5.0	3.9	2.0
103692	(5×0.25)	5.5	4.6	2.4
103693	(7×0.25)	6.1	6.4	3.7
103694	(10×0.25)	6.8	8.4	5.1
103695	(12×0.25)	8.0	10.2	5.7
103696	(18×0.25)	8.4	13.8	8.6
103697	(25×0.25)	11.3	20.1	11.1
0.34 mm²				
103699	(3×0.34)	4.9	3.7	2.0
103700	(4×0.34)	5.3	4.4	2.5
103701	(5×0.34)	6.0	6.1	3.6
103702	(7×0.34)	6.4	7.3	4.4
103703	(10×0.34)	8.3	10.8	6.1
103704	(12×0.34)	8.4	11.7	6.7
103705	(18×0.34)	10.0	17.4	10.7
103706	(25×0.34)	11.9	23.7	13.6
0.5 mm²				
103707	(2×0.5)	5.6	4.1	2.2
103708	(3×0.5)	6.4	6.4	3.4
103709	(4×0.5)	6.8	7.6	4.1
103710	(5×0.5)	7.5	8.8	4.8
103711	(7×0.5)	8.0	11.2	6.1
103712	(10×0.5)	9.6	16.5	9.7
103713	(12×0.5)	10.2	18.3	10.7
103714	(18×0.5)	12.3	26.2	14.6
103715	(25×0.5)	14.3	34.1	18.9
0.75 mm²				
103717	(3×0.75)	7.0	7.7	4.4
103718	(4×0.75)	7.6	10.0	5.4
103719	(5×0.75)	8.3	11.1	6.4
103720	(7×0.75)	9.1	14.8	9.1
103721	(10×0.75)	11.7	21.6	12.6
103722	(12×0.75)	11.8	23.8	14.1
103723	(18×0.75)	13.8	32.9	19.9
103724	(25×0.75)	16.5	44.5	25.9

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

Halogen free electronic cables- stranded pairs, shielded

HALOGENFLEX LIH (C) H-D TP



Application

- Ideal for all application locations in which the release of halogens in the event of fire is to be avoided, above all in rooms and public buildings with high concentrations of people
- For trouble-free transmission in all areas of electronics, measuring, control and regulation technology
- Connection and data cable for signal, measurement and data transmission for telephone and voice transmission.
- In dry and moist rooms
- As control, measurement and regulation cable medium operating conditions

Properties

- Environmentally friendly halogen-free cable
- Halogen-free conductors prevent poisonous and corrosive fire gases from damaging property and causing injury to people
- Very good shielding attenuation
- High crosstalk attenuation through paired stranding
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Rated voltage	300 V
Test voltage	1200 V
Insulation resistance	min. 20 MΩ × km
Temperature range	
moving	-25 °C to +70 °C
fixed	-40 °C to +70 °C
Minimum bending radius	
moving	D × 15
fixed	D × 6
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; IEC 60332-1
Halogen-free	according to VDE 0482 T. 267-2-1; EN 50267-2-1; IEC 60754-1
Corrosiveness of smoke emissions	according to VDE 0482 T. 267-2-2; EN 50267-2-2; IEC 60754-2
Smoke density	VDE 0482 section 268-2; EN 50268-2;

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special conductor insulation HI2 according to VDE 0207 T. 23
- Conductors colour-coded according to DIN 47100
- Conductors stranded pairs, foil banding
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Outer jacket Flame-retardant, halogen-free special thermoplast HM2 according to VDE 0207T. 24
- Jacket colour grey RAL 7001 or 7032

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.14 mm²				
103780	(2×2×0.14)	5.2	3.5	1.9
103781	(3×2×0.14)	5.4	3.8	2.2
103782	(4×2×0.14)	5.5	4.3	3.2
103783	(5×2×0.14)	6.2	4.9	3.5
103784	(8×2×0.14)	7.5	9.5	5.1
103785	(10×2×0.14)	8.3	11.2	6.0
0.25 mm²				
103786	(2×2×0.25)	6.7	4.5	3.1
103787	(3×2×0.25)	7.1	6.7	3.7
103788	(4×2×0.25)	7.9	8.3	4.5
103789	(5×2×0.25)	8.6	8.6	5.3
103790	(8×2×0.25)	9.9	12.3	8.4
103791	(10×2×0.25)	11.2	13.0	10.1
0.34 mm²				
103792	(2×2×0.34)	7.0	6.9	3.5
103793	(3×2×0.34)	7.4	9.4	4.4
103794	(4×2×0.34)	8.3	11.1	5.5
103795	(5×2×0.34)	9.3	12.3	7.5
103796	(8×2×0.34)	10.5	15.9	10.1
103797	(10×2×0.34)	12.2	20.9	12.2
0.5 mm²				
103798	(2×2×0.5)	8.7	7.8	4.7
103799	(3×2×0.5)	9.2	10.9	5.9
103800	(4×2×0.5)	10.8	13.5	7.3
103801	(5×2×0.5)	11.9	16.1	10.1
103802	(8×2×0.5)	13.4	19.4	13.8
103803	(10×2×0.5)	15.1	24.4	16.7
0.75 mm²				
103804	(2×2×0.75)	9.8	10.5	7.1
103805	(3×2×0.75)	10.4	13.8	8.9
103806	(4×2×0.75)	10.7	15.8	11.1
103807	(5×2×0.75)	13.3	19.9	13.3
103808	(8×2×0.75)	15.0	27.1	18.6
103809	(10×2×0.75)	17.5	34.3	22.6

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC electronic cables - unshielded - UL style 2464 / CSA

LÜTZE ELECTRONIC LiYY AWG



Application

- In all areas of electronics, measuring, control and regulation technologies
- In low voltage switchgears, communications engineering
- In dry and moist rooms
- For flexible application for free movement and without tensile loading

Properties

- Minimal cable diameter through thin-walled PVC semi-rigid conductor insulation according to UL
- Especially suitable for cost-efficient IDC-connection (Insulation Displacement Connection)
- Outer jacket special-PVC Class 43 according to UL
- Very good oil resistance
- Very good UV stability
- Largely resistant to acids and bases (see tech. information)
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

UL approval	300 V 80 °C
Rated voltage	300 V
Test voltage	1500 V
Insulation resistance	min. 100 MΩ x km
Temperature range	
moving	-15 °C to +80 °C
fixed	-30 °C to +80 °C
Minimum bending radius	
fixed	D x 4
for free movement	D x 15
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1

Design

- Bare copper wire in the AWG design
 - AWG 26/7 = 0.14 mm²
 - AWG 24/7 = 0.23 mm²
 - AWG 22/7 = 0.34 mm²
 - AWG 20/7 = 0.56 mm²
- Special semi-rigid PVC conductor insulation according to UL
- Conductors colour-coded according to international colour code (up to 19 conductors identical according to VDE 0881)
- Conductors stranded layers
- Jacket special PVC according to UL class 43
- Jacket colour black RAL 9005, grey RAL 7001 available on request

Part-No.	Number of strands/cross-section	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
AWG26				
118770	2xAWG26	3.6	1.2	0.3
118771	3xAWG26	3.8	1.5	0.4
118772	4xAWG26	4.0	1.8	0.6
118773	6xAWG26	4.6	2.5	0.8
118774	8xAWG26	5.1	3.4	1.1
118775	10xAWG26	5.6	3.8	1.4
118776	12xAWG26	5.8	4.6	1.7
AWG24				
118792	2xAWG24	3.8	1.6	0.5
118793	3xAWG24	4.0	1.9	0.7
118794	4xAWG24	4.3	2.3	0.9
118777	6xAWG24	4.9	3.2	1.4
118778	8xAWG24	5.7	4.6	1.8
118779	10xAWG24	6.0	5.5	2.3
118780	12xAWG24	6.2	6.0	2.8
AWG22				
118733	2xAWG22	4.3	2.3	0.7
118740	3xAWG22	4.4	2.7	1.0
118734	4xAWG22	4.8	3.3	1.4
118735	6xAWG22	5.7	3.7	2.0
118781	8xAWG22	6.2	5.9	2.7
118782	10xAWG22	7.0	7.1	3.4
118783	12xAWG22	7.2	8.2	4.1
AWG20				
118741	2xAWG20	4.6	2.9	1.1
118784	3xAWG20	4.8	3.5	1.7
118730	4xAWG20	5.4	4.5	2.2
118785	6xAWG20	6.1	6.3	3.4
118786	8xAWG20	6.8	7.9	4.5
118787	10xAWG20	7.6	10.2	5.6
118788	12xAWG20	8.1	11.0	6.7

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC electronic cables - shielded - UL style 2464 / CSA

LÜTZE ELECTRONIC LiY(C)Y AWG



Application

- In all areas of electronics, measuring, control and regulation technology
- In low voltage switchgears and communications engineering
- In dry and moist rooms
- For flexible application for free movement and without tensile loading
- Especially for industrial environments with high interference potential, in machines, plant and device construction

Properties

- Minimal cable diameter through thin-walled PVC semi-rigid conductor insulation according to UL
- Especially suitable for cost-efficient IDC-connection (Insulation Displacement Connection)
- High active and passive interference resistance
- Outer jacket special-PVC Class 43 according to UL
- Very good oil resistance
- Very good UV stability
- Largely resistant to acids and bases (see tech. information)
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

UL approval	300 V 80 °C
Rated voltage	300 V
Test voltage	1500 V
Insulation resistance	min. 100 MΩ × km
Temperature range	
moving	-15 °C to +80 °C
fixed	-30 °C to +80 °C
Minimum bending radius	
fixed	D × 4
for free movement	D × 15
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1

Design

- Bare copper wire in the AWG design
 - AWG 26/7 = 0.14 mm²
 - AWG 24/7 = 0.23 mm²
 - AWG 22/7 = 0.34 mm²
 - AWG 20/7 = 0.56 mm²
- Special semi-rigid PVC conductor insulation according to UL
- Conductors colour-coded according to international colour code (up to 19 conductors identical according to VDE 0881)
- Conductors stranded layers
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Jacket special PVC according to UL class 43
- Jacket colour black RAL 9005, grey RAL 7001 available on request

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
AWG26				
118750	(2xAWG26)	4.2	1.7	1.2
118751	(3xAWG26)	4.4	1.9	1.3
118752	(4xAWG26)	4.7	2.3	1.5
118753	(6xAWG26)	5.2	3.1	2.0
118754	(8xAWG26)	5.6	4.0	3.1
118755	(10xAWG26)	6.3	4.5	3.4
118756	(12xAWG26)	6.6	5.1	3.8
AWG24				
118767	(2xAWG24)	4.6	1.9	1.4
118768	(3xAWG24)	4.8	2.4	1.7
118769	(4xAWG24)	5.2	2.8	2.3
118747	(6xAWG24)	5.8	3.9	2.9
118749	(8xAWG24)	5.0	3.8	3.8
118748	(10xAWG24)	5.8	4.3	4.3
118739	(12xAWG24)	6.4	5.1	5.1
AWG22				
118742	(2xAWG22)	4.8	3.2	1.5
118757	(3xAWG22)	5.0	3.6	1.7
118736	(4xAWG22)	5.4	4.5	2.5
118758	(6xAWG22)	5.8	6.1	3.4
118759	(8xAWG22)	6.8	7.3	4.1
118760	(10xAWG22)	7.9	9.3	5.7
AWG20				
118761	(2xAWG20)	5.1	4.1	2.2
118762	(3xAWG20)	5.3	4.8	2.7
118763	(4xAWG20)	5.7	5.8	3.3
118764	(6xAWG20)	6.6	7.8	4.6
118765	(8xAWG20)	7.7	10.2	6.6
118766	(10xAWG20)	8.2	12.0	7.8

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC electronic cables - unshielded

LÜTZE ELECTRONIC LiYY



Application

- In all areas of electronics, measuring, control and regulation technologies
- In low voltage switchgears, communications engineering
- In dry and moist rooms
- For flexible application for free movement and without tensile loading

Properties

- PVC flame-retardant, self-extinguishing
- Widely resistant to oils, greases, acids and bases
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Voltage	
up to 0.34 mm ²	300 V
from 1,5 mm ²	500 V
Test voltage	
up to 0.34 mm ²	1200 V
after 0.5 mm ²	2000 V
Insulation resistance	min. 20 MΩ x km
Operating capacitance	approx. 120 – 150 pF/m
Temperature range	
moving	-5 °C to +70 °C
fixed	-30 °C to +70 °C
Minimum bending radius	
fixed	D x 4
for free movement	D x 12
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special PVC conductor insulation
- Conductors colour-coded according to DIN 47100
- Conductors stranded layers
- Jacket special PVC TM2 according to HD21.1, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.14 mm²				
110000	3x0.14	3.4	1.6	0.4
110001	4x0.14	3.6	2.1	0.5
110002	5x0.14	4.0	2.2	0.7
110003	6x0.14	4.4	3.1	0.8
110004	7x0.14	4.4	3.3	0.9
110415	8x0.14	4.9	3.5	1.1
110005	10x0.14	5.5	4.7	1.3
110006	12x0.14	5.6	5.3	1.6
110008	16x0.14	6.2	6.9	2.2
110009	18x0.14	6.6	7.2	2.4
110010	20x0.14	7.1	8.5	2.7
110011	24x0.14	8.0	10.5	3.2
0.25 mm²				
110988	2x0.25	3.8	2.0	0.5
110070	3x0.25	4.0	3.1	0.7
110071	4x0.25	4.5	3.5	1.0
110072	5x0.25	5.0	4.0	1.2
110073	6x0.25	5.4	5.0	1.4
110089	7x0.25	5.4	5.3	1.7
110074	8x0.25	6.0	5.6	1.9
110075	10x0.25	6.2	6.5	2.4
110076	12x0.25	7.2	7.2	2.9
110078	16x0.25	7.8	9.2	3.8
110079	18x0.25	8.5	11.0	4.3
110080	20x0.25	8.8	11.5	4.8
110081	24x0.25	9.4	13.0	5.8
0.34 mm²				
110927	2x0.34	4.1	2.5	0.7
110122	3x0.34	4.4	2.7	1.0
110123	4x0.34	4.6	3.2	1.3
110249	5x0.34	5.3	4.2	1.6
110125	6x0.34	5.5	4.6	2.0
110127	8x0.34	6.6	6.2	2.6
110129	10x0.34	7.6	8.0	3.3
110131	12x0.34	7.7	8.8	3.9
110719	16x0.34	8.9	12.6	5.2
110135	18x0.34	9.0	12.8	5.9
110945	20x0.34	9.6	15.9	6.5
0.5 mm²				
108125	2x0.5	5.0	3.5	1.0
100327	3x0.5	5.3	4.2	1.4
100338	4x0.5	5.9	5.2	1.9
101052	5x0.5	6.5	7.7	2.4
100918	6x0.5	7.1	9.0	2.9
108126	7x0.5	7.1	10.0	3.4
100920	8x0.5	7.7	12.0	3.8
100922	10x0.5	8.6	12.5	4.8
100964	12x0.5	8.9	13.3	5.8
100948	16x0.5	10.0	15.2	7.7
108128	20x0.5	11.5	19.0	9.6
100951	24x0.5	12.2	23.7	11.5
0.75 mm²				
108130	2x0.75	5.6	4.7	1.4
108131	4x0.75	6.3	5.0	2.8
108132	5x0.75	7.1	6.0	3.6
108133	7x0.75	7.7	8.0	5.0
108134	10x0.75	9.6	11.0	7.2
108317	12x0.75	10.1	14.5	8.6
108136	16x0.75	11.5	19.0	11.5
108137	20x0.75	12.5	24.0	14.4
108138	24x0.75	13.6	25.0	17.3

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC electronic cables - shielded

LÜTZE ELECTRONIC LiY (C)Y



Application

- For trouble-free transmission in all areas of electronics, measuring, control and regulation technology
- In low voltage switchgears and communications engineering
- In dry and moist rooms
- For flexible application for free movement and without tensile loading

Properties

- PVC Flame-retardant, self-extinguishing
- Very good shielding attenuation
- Outer jacket special-PVC TI2 according to HD 21.1
- Largely resistant to acids and bases
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

Voltage

up to 0.34 mm ²	300 V
from 1,5 mm ²	500 V

Test voltage

up to 0.34 mm ²	1200 V
after 0.5 mm ²	2000 V

Insulation resistance

min. 20 MΩ × km

Operating capacitance

approx. 120 – 150 pF/m

Temperature range

moving	-5 °C to +70 °C
fixed	-30 °C to +70 °C

Minimum bending radius

fixed	D × 6
for free movement	D × 12

Burning behaviour

Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special PVC conductor insulation
- Conductors colour-coded according to DIN 47100
- Conductors stranded layers, foil banding
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Jacket special PVC TM2 according to HD21.1, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.14 mm²				
111206	(2×0.14)	3.7	2.1	1.3
108147	(3×0.14)	3.9	2.5	1.4
108149	(4×0.14)	4.1	2.9	1.4
110929	(5×0.14)	4.4	3.5	2.0
111086	(6×0.14)	4.7	3.8	2.2
110658	(7×0.14)	4.7	4.1	2.4
110722	(8×0.14)	5.0	4.5	2.6
110710	(10×0.14)	5.9	5.6	2.9
110736	(12×0.14)	6.1	6.1	3.2
118466	(16×0.14)	6.8	8.1	4.9
118481	(18×0.14)	7.1	9.2	5.4
110478	(21×0.14)	7.4	10.6	6.0
118438	(25×0.14)	8.3	12.0	7.8
0.25 mm²				
110993	(2×0.25)	4.3	2.0	1.5
118430	(3×0.25)	4.3	3.5	1.8
118439	(4×0.25)	4.8	4.4	2.2
108154	(5×0.25)	5.2	5.0	2.5
118406	(6×0.25)	5.8	5.8	3.0
110650	(7×0.25)	5.8	6.0	3.2
118407	(8×0.25)	6.2	6.7	3.5
110475	(10×0.25)	7.3	8.1	4.2
118467	(12×0.25)	7.5	9.1	5.0
100552	(16×0.25)	8.2	13.3	7.1
118476	(18×0.25)	8.6	13.7	8.0
111327	(21×0.25)	9.0	17.1	10.5
110471	(25×0.25)	10.7	19.0	11.7
0.34 mm²				
110787	(2×0.34)	4.7	3.3	1.7
110371	(3×0.34)	5.2	4.1	2.1
110743	(4×0.34)	5.5	4.8	2.5
118408	(5×0.34)	6.0	5.8	3.0
118409	(6×0.34)	6.4	6.4	3.6
118410	(7×0.34)	6.4	7.0	4.2
118411	(8×0.34)	7.1	9.3	4.5
118421	(10×0.34)	8.1	11.0	6.3
110790	(12×0.34)	8.3	12.0	7.0
101280	(16×0.34)	9.2	14.7	8.7
110717	(18×0.34)	10.2	17.2	10.8
118427	(21×0.34)	10.7	19.6	12.7
101281	(24×0.34)	11.7	22.9	14.0

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC electronic cables - shielded

LÜTZE ELECTRONIC LiY (C)Y



Application

- For trouble-free transmission in all areas of electronics, measuring, control and regulation technology
- In low voltage switchgears and communications engineering
- In dry and moist rooms
- For flexible application for free movement and without tensile loading

Properties

- PVC Flame-retardant, self-extinguishing
- Very good shielding attenuation
- Outer jacket special-PVC T12 according to HD 21.1
- Largely resistant to acids and bases
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

Voltage

up to 0.34 mm ²	300 V
from 1,5 mm ²	500 V

Test voltage

up to 0.34 mm ²	1200 V
after 0.5 mm ²	2000 V

Insulation resistance

min. 20 MΩ × km

Operating capacitance

approx. 120 – 150 pF/m

Temperature range

moving	-5 °C to +70 °C
fixed	-30 °C to +70 °C

Minimum bending radius

fixed	D × 6
for free movement	D × 12

Burning behaviour

Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special PVC conductor insulation
- Conductors colour-coded according to DIN 47100
- Conductors stranded layers, foil banding
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Jacket special PVC TM2 according to HD21.1, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
111324	(1×0.5)	3.2	2.0	1.4
118320	(2×0.5)	5.2	4.2	2.9
118413	(3×0.5)	5.7	5.5	3.5
118412	(4×0.5)	6.1	6.8	4.5
110720	(5×0.5)	6.8	8.2	5.0
110374	(7×0.5)	7.4	10.9	6.8
118471	(8×0.5)	7.9	12.3	7.5
101423	(10×0.5)	9.1	13.5	9.3
118991	(12×0.5)	9.4	16.0	10.7
110507	(16×0.5)	10.9	21.0	12.9
110742	(18×0.5)	11.5	23.7	15.2
110514	(25×0.5)	13.5	33.5	21.1
0.75 mm²				
118300	(1×0.75)	3.5	2.0	1.8
118414	(2×0.75)	5.8	5.0	3.5
118298	(3×0.75)	6.1	7.1	4.6
118299	(4×0.75)	6.8	7.8	5.6
118295	(5×0.75)	7.4	10.0	7.0
110376	(6×0.75)	8.0	11.6	8.5
118349	(7×0.75)	8.0	13.1	9.0
118445	(8×0.75)	8.5	15.1	11.0
110399	(10×0.75)	10.5	17.3	13.1
110477	(12×0.75)	10.8	21.8	14.8
111117	(16×0.75)	12.1	29.0	18.3
1.0 – 1.5 mm²				
108057	(2×1.0)	6.1	7.4	4.5
110915	(3×1.0)	6.4	9.0	5.4
110917	(4×1.0)	7.2	10.7	6.9
110918	(5×1.0)	7.8	13.2	8.2
110919	(7×1.0)	8.4	15.8	10.6

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PVC electronic cables- stranded pairs, shielded

LÜTZE ELECTRONIC LiY (C)Y TP



Application

- For trouble-free transmission in all areas of electronics, measuring, control and regulation technology
- In low voltage switchgears and communications engineering
- In office machines and computers
- In dry and moist rooms
- For flexible application for free movement and without tensile loading

Properties

- PVC flame-retardant, self-extinguishing
- Very good shielding attenuation
- High crosstalk attenuation through paired stranding
- Widely resistant to oils, greases, acids and bases
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

Voltage

up to 0.34 mm ²	300 V
from 1,5 mm ²	500 V

Test voltage

up to 0.34 mm ²	1200 V
after 0.5 mm ²	2000 V

Insulation resistance

min. 20 MΩ x km

Operating capacitance

approx. 120 – 150 pF/m

Temperature range

moving	-5 °C to +70 °C
fixed	-30 °C to +70 °C

Minimum bending radius

fixed	D x 6
for free movement	D x 12

Burning behaviour

Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1

Design


- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special PVC conductor insulation
- Conductors colour-coded according to DIN 47100
- Conductors stranded pairs, foil banding
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Jacket special PVC TM2 according to HD21.1, matt, adhesion-free surface
- Jacket colour grey RAL 7032

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.14 mm²				
110600	(2x2x0.14)	5.1	3.5	1.8
110601	(3x2x0.14)	5.5	4.2	2.3
110602	(4x2x0.14)	6.3	5.0	2.5
101321	(5x2x0.14)	6.9	7.0	2.8
110604	(6x2x0.14)	7.3	8.5	3.8
110659	(8x2x0.14)	8.1	9.0	4.8
110606	(10x2x0.14)	8.9	11.5	6.0
110607	(12x2x0.14)	9.3	12.5	7.3
110609	(16x2x0.14)	10.5	14.8	9.8
110611	(20x2x0.14)	11.5	18.5	11.5
0.25 mm²				
110618	(2x2x0.25)	6.0	4.6	2.4
110619	(3x2x0.25)	6.3	5.7	3.5
110620	(4x2x0.25)	7.3	7.7	4.2
118195	(5x2x0.25)	7.5	8.7	5.0
110622	(6x2x0.25)	9.0	10.4	5.8
118251	(8x2x0.25)	9.4	11.8	7.0
110625	(10x2x0.25)	11.1	14.0	10.2
110626	(12x2x0.25)	12.1	19.0	12.0
110629	(20x2x0.25)	14.1	26.2	16.0
0.34 mm²				
110633	(2x2x0.34)	7.1	5.2	2.6
110634	(3x2x0.34)	8.0	6.8	4.0
110635	(4x2x0.34)	8.5	9.0	5.2
110637	(6x2x0.34)	9.6	13.7	7.9
118252	(8x2x0.34)	10.9	13.9	8.8
110665	(10x2x0.34)	12.3	14.3	12.2
118297	(25x2x0.34)	18.1	41.5	26.6
0.5 mm²				
110641	(2x2x0.5)	8.0	8.7	4.6
110642	(3x2x0.5)	8.6	10.9	6.4
110643	(4x2x0.5)	9.6	13.9	8.2
110248	(5x2x0.5)	11.8	17.6	9.8
110660	(6x2x0.5)	11.3	18.0	10.8
110645	(8x2x0.5)	12.0	23.8	13.6
118244	(10x2x0.5)	14.1	28.4	16.0
118322	(12x2x0.5)	15.0	32.4	18.6
110647	(16x2x0.5)	17.6	44.6	24.0
0.75 mm²				
110651	(2x2x0.75)	8.6	10.6	5.8
110137	(3x2x0.75)	9.5	14.0	8.4
110653	(4x2x0.75)	10.8	17.9	10.8
110795	(5x2x0.75)	12.2	22.4	12.6
111109	(6x2x0.75)	12.5	24.6	14.6
110829	(8x2x0.75)	14.8	30.5	18.8
111232	(12x2x0.75)	17.6	45.6	26.1
110745	(16x2x0.75)	21.5	49.2	33.6

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

PUR actor-sensor cables

LÜTZE ELECTRONIC PUR AS

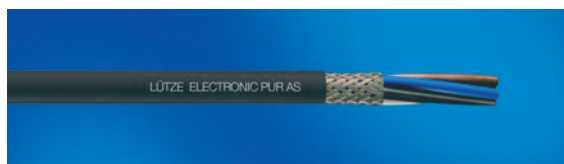

Application

- Machine and device construction, transport and conveyor technology
- Actor, sensor technology

Properties

- Flame-retardant, self-extinguishing
- Very good alternating bending strength
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good resistance to use and salt water
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzines and kerosene
- Free from silicone paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

Rated voltage	300 V
Test voltage	
up to 0.34 mm ²	1200 V
after 0.5 mm ²	2000 V
Insulation resistance	min. 20 MΩ × km
Temperature range	
moving	-5 °C to +80 °C
fixed	-25 °C to +80 °C
Minimum bending radius	
moving	D × 7.5
fixed	D × 4
Burning behaviour	Flame-retardant according to VDE 0482 part 265-2; DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1 Flame-Test; CSA FT 1

Design

- Bare copper wire, multi-strand according to DIN VDE 0295 class 5, IEC 60228 class 5
- Special thermoplastic conductor insulation
- Conductors colour-coded
- Meshwork from tinned copper wire braid, optical covering ≥ 85 %
- Full polyurethane jacket, matt, adhesion-free surface

Part-No.	Number of strands/cross-section/ strand colours	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
Lütze Electronic PUR AS grey jacket				
111053	3x0.34 brown, blue, black	5.0	3.6	1.0
110190	4x0.34 white, brown, blue, black	5.0	4.4	1.3
110617	3x0.5 brown, blue, black	5.4	4.2	1.5
101278	3x0.75 brown, blue, black	5.9	5.2	2.2
Lütze Electronic PUR AS, black jacket				
118442	2x0.25 brown, blue	3.9	1.7	0.5
118004	3x0.25 brown, blue, black	4.0	2.0	0.8
118636	4x0.25 white, brown, blue, black	4.3	2.8	1.0
118005	5x0.25 white, brown, black, blue, grey	4.5	2.8	1.3
110624	2x0.34 brown, blue	4.9	3.4	0.7
118049	3x0.34 brown, blue, black	4.9	3.6	1.0
118006	4x0.34 white, brown, blue, black	4.5	2.8	1.4
118007	5G0.34 white, brown, blue, black, greenyellow	4.9	3.3	1.7
118070	2x0.5 brown, blue	4.3	2.6	1.0
110621	3x0.5 brown, blue, black	4.5	3.1	1.5
118008	4x0.5 white, brown, blue, black	5.0	3.8	2.0
118014	5G0.5 white, brown, blue, black, greenyellow	5.4	4.4	2.5
Lütze Electronic PUR AS shielded, black jacket				
118009	(2x0.34) brown, blue	4.5	2.7	1.5
118160	(3x0.34) brown, blue, black	4.7	3.2	2.0
118010	(4x0.34) white, brown, blue, black	5.0	3.8	2.4
118011	(5x0.34) white, brown, black, blue, grey	5.4	4.4	2.8
118012	(5G0.34) white, brown, blue, black, greenyellow	5.4	4.4	2.8

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

8. Temperature-resistant cables



Temperature-resistant cables · Overview



No. 1



No. 2



No. 3



No. 4



No. 5



No. 6



No. 7

LÜTZE THERMOFLEX® and others

Product	Construction						Characteristics						Application/usage					Approvals					Page	No.	
	Isolation	Labelling	Inner jacket	Shield	Outer jacket	Cross-sectional area	Oil resistant	Abrasion-proof	Flexible	Chemical resistant	Halogen free	Nominal voltage (V)	Application	Flexible	Continuous use with compulsory guide	Torsion	Mechanical conditions	Temperature range °C	UL/CSA recognized	UL listed	VDE/HAR	FDA			CNOMO
LÜTZE THERMOFLEX TH 150	XLPE	No. coloured	-	-	XLPE	0,5-2,5	●	○	●	○	●	450/750	Connecting Cable	●	-	-	high	-50 +150						8.4	1
LÜTZE SILICON® SIHF	Silicon	No. coloured	-	-	Silicon	0,5-25	●	-	●	●	●	300/500	Control	●	-	-	medium	-60 +180						8.5	2
LÜTZE SILICON® SIHFP	Silicon	No. coloured	Silicon	Steel	-	0,75-16	●	-	●	●	●	300/500	Control	○	-	-	high	-60 +180						8.6	3
LÜTZE SILICON SIF	Silicon	coloured	-	-	-	0,25-150	●	-	●	●	●	500	Wiring conductor	●	-	-	medium	-60 +180						8.7	4
LÜTZE Nickel conductor GL	Glass fiber	-	-	-	-	0,75-1,0	●	-	●	●	●	300	Wiring conductor	●	-	-	high	-60 +350						8.8	5
LÜTZE Single conductor PTFE	PTFE	coloured	-	-	-	0,5-16	●	●	●	●	-	600	Wiring conductor	●	-	-	high	-190 +280						8.9	6
LÜTZE Single conductor FEP	FEP	coloured	-	-	-	0,25-16	●	●	●	●	-	600	Wiring conductor	●	-	-	high	-100 +205						8.9	7

● = suitable
○ = conditionally suitable

Notes

Temperature-resistant crosslinked control cables

LÜTZE THERMOFLEX TH 150



Application

- The wide range of application temperatures of crosslinked materials means that they can be used in the most extreme climatic conditions.
- In machine and plant construction at high ambient temperatures and extremely harsh operating conditions
- Optimally suited for use outdoors under extreme conditions
- Wherever constant ambient temperatures up to +130 °C are present
- Heating, climate and ventilation technology

Properties

- High resistance to welding beads
- Temperature and hot air resistant control cable
- halogen-free, no corrosive gases
- High electrical dielectric strength
- Optimal resistance to weathering, UV and abrasion
- Free from paint wetting impairment substances (LABS-free), RoHS-compliant

Technical data

Voltage	
U ₀ /U	450/750 V
Test voltage	2500 V
Insulation resistance	min. 200 MΩ × km
Temperature range	-50 °C to +150 °C
Hot deformation resistance	up to 150 °C according to DIN EN 60811-3-1
Minimum bending radius	
moving	D × 10
fixed	D × 4
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2; DIN EN 50265-2-1; IEC 60332-1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design


- Bare copper braid galvanised, fine stranded according to DIN VDE 0295 class 5 and IEC 60228 class 5
- Conductor insulation networked polyolefin copolymer
- Conductor colour according to DIN VDE 0293-308 (new)
 - 2-wire: brown, blue
 - 3-wire: greenyellow, brown, blue
 - 4-wire: greenyellow, brown, black, grey
 - 5-wire: greenyellow, blue, brown, black, grey
- starting with 6 conductors black with white number print according to DIN EN 50334
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
 - G = with green/yellow ground conductor; x = without ground conductor
- Conductors stranded layers
- Jacket networked polyolefin copolymer
- Jacket colour black

Part-No.	Number of strands/cross-section	Outer-∅ approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
111820	2x0.5	4.3	2.8	1.0
111821	3G0.5	4.5	3.4	1.5
111822	4G0.5	4.9	4.1	2.0
111823	5G0.5	5.4	5.1	2.5
111824	7G0.5	5.9	6.5	3.5
0.75 mm²				
111826	2x0.75	4.8	3.7	1.5
111827	3G0.75	5.1	4.5	2.4
111828	4G0.75	5.6	5.7	3.0
111829	5G0.75	6.1	6.7	3.7
111830	7G0.75	6.7	8.7	5.2
1.0 mm²				
111832	2x1.0	5.4	4.9	2.0
111833	3G1.0	5.7	5.9	3.0
111834	4G1.0	6.2	7.3	4.0
111835	5G1.0	6.8	8.6	5.0
111836	7G1.0	7.5	11.5	7.0
1.5 mm²				
111838	2x1.5	6.0	6.2	2.9
110155	3G1.5	6.2	7.7	4.4
110156	4G1.5	6.9	9.5	5.8
110157	5G1.5	7.6	11.6	7.3
110158	7G1.5	8.3	15.2	10.2
2.5 mm²				
111840	2x2.5	7.0	9.1	4.9
111841	3G2.5	7.5	11.8	7.3
111842	4G2.5	8.2	14.6	9.7
111843	5G2.5	9.0	17.6	12.1
111844	7G2.5	10.0	23.6	16.9

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

Silicon control cable

LÜTZE SILICON SIHF

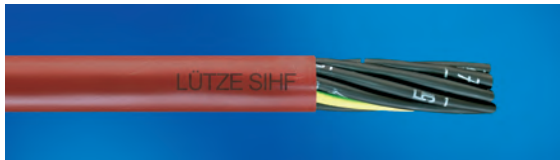

Application

- In electrical devices with ambient temperatures up to +180°C
- In smelting works, steel works and rolling mills, cement, glass and ceramic industries
- In lighting and heating devices
- Flexibly usable for low temperatures

Properties

- Temperature and hot air-resistant control cable
- Halogen-free, no burning transmission
- High dielectric strength
- The mechanical properties are reduced for running under air termination
- Resistant to high-molecular oils, plant and animal based greases, bases, salt solutions and diluted acids
- RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
Test voltage	2000 V
Insulation resistance	min. 200 MΩ × km
Temperature range	
continuous	-60 °C to +180 °C
temporary	to +220 °C
Minimum bending radius	
moving	D × 7.5
fixed	D × 4
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2; DIN EN 50265-2-1; IEC 60332-1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Bare copper braid galvanised, fine stranded according to DIN VDE 0295 class 5 and IEC 60228 class 5
- Silicon conductor isolation
- Conductor colour according to DIN VDE 0293-308 (new)
 - 2-wire: brown, blue
 - 3-wire: greenyellow, brown, blue
 - 4-wire: greenyellow, brown, black, grey
 - 5-wire: greenyellow, blue, brown, black, grey
- starting with 6 conductors black with white number print according to DIN EN 50334
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
 - G = with green/yellow ground conductor; x = without ground conductor
- Conductors stranded layers
- Jacket special silicone rubber, light talcum-powdered
- Jacket colour redbrown

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
118377	2×0.5	5.8	4.0	1.0
110732	3G0.5	6.1	4.7	1.5
111810	4G0.5	6.7	4.9	1.9
111811	5G0.5	7.7	7.5	2.4
110245	7G0.5	8.3	10.0	3.4
110165	12G0.5	10.8	14.1	5.8
0.75 mm²				
110200	2×0.75	6.4	5.7	1.4
110201	3G0.75	6.8	6.6	2.2
110202	4G0.75	7.8	6.8	2.9
110203	5G0.75	8.5	10.5	3.6
110204	7G0.75	9.2	13.1	5.0
110244	12G0.75	11.1	18.5	8.7
110977	16G0.75	12.6	21.8	11.5
1.0 mm²				
110205	2×1.0	6.6	5.9	1.9
110206	3G1.0	7.4	7.7	2.9
110207	4G1.0	8.0	9.4	3.8
110208	5G1.0	8.8	11.5	4.8
110209	7G1.0	9.5	14.4	6.7
110901	12G1.0	11.5	23.1	11.5
110150	16G1.0	13.1	30.2	15.4
1.5 mm²				
110210	2×1.5	7.6	8.1	2.9
110211	3G1.5	8.0	9.8	4.3
110212	4G1.5	8.8	12.2	5.8
110213	5G1.5	9.6	14.7	7.2
110214	7G1.5	10.4	18.7	10.1
110216	12G1.5	14.6	31.4	17.3
2.5 mm²				
110221	3G2.5	9.7	15.2	7.2
110222	4G2.5	10.6	18.8	9.6
110223	5G2.5	11.6	22.8	12.0
110224	7G2.5	13.0	32.0	16.8
4 – 25 mm²				
110227	3G4	11.4	22.4	11.5
110228	4G4	13.1	29.5	15.4
110229	5G4	14.4	35.9	19.2
110232	4G6	16.2	44.1	23.0
110233	5G6	17.7	53.5	28.8
110235	4G10	20.4	70.7	38.4
110242	5G10	22.5	90.0	48.0
110236	4G16	24.3	71.4	61.6
110243	4G25	31.8	150.0	96.0

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

Silicon control cable steel wire-reinforced

LÜTZE SILICON SIHFP



Application

- In electrical devices with ambient temperatures up to +180°C
- In smelting works, steel works and rolling mills, cement, glass and ceramic industries
- In lighting and heating devices
- Flexibly usable for low temperatures

Properties

- Temperature and hot air-resistant control cable
- Halogen-free, no burning transmission
- High dielectric strength
- The mechanical properties are reduced for running under air termination
- Resistant to high-molecular oils, plant and animal based greases, bases, salt solutions and diluted acids
- RoHS-compliant

Technical data

Voltage	
U ₀ /U	300/500 V
Test voltage	2000 V
Insulation resistance	min. 200 MΩ x km
Temperature range	
continuous	-60 °C to +180 °C
temporary	to +220 °C
Minimum bending radius	
moving	D x 15
fixed	D x 4
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2; DIN EN 50265-2-1; IEC 60332-1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Bare copper braid galvanised, fine stranded according to DIN VDE 0295 class 5 and IEC 60228 class 5
- Silicon conductor insulation
- Conductor colour according to DIN VDE 0293-308 (new)
 - 2-wire: brown, blue
 - 3-wire: greenyellow, brown, blue
 - 4-wire: greenyellow, brown, black, grey
 - 5-wire: greenyellow, blue, brown, black, grey
- starting with 6 conductors black with white number print according to DIN EN 50334
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
 - G = with green/yellow ground conductor; x = without ground conductor
- Conductors stranded layers
- Jacket special silicone rubber, light talcum-powdered
- Banding Glass silk tape
- Galvanised steel wire braid

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.75 mm²				
110251	2x0.75	6.8	10.7	1.4
110252	3G0.75	7.1	11.5	2.2
110253	4G0.75	7.7	12.0	2.9
110254	5G0.75	8.3	17.5	3.6
110255	7G0.75	9.2	20.9	5.0
1.0 mm²				
110256	2x1.0	7.0	12.1	1.9
110257	3G1.0	7.3	14.5	2.9
110258	4G1.0	7.9	15.8	3.8
110259	5G1.0	8.8	20.2	4.8
110260	7G1.0	9.5	23.2	6.7
1.5 mm²				
110261	2x1.5	8.2	12.5	2.9
110262	3G1.5	8.6	14.5	4.3
110263	4G1.5	9.5	17.0	5.8
110264	5G1.5	10.4	20.0	7.2
110265	7G1.5	11.4	24.4	10.1
2.5 mm²				
110272	3G2.5	10.1	22.4	7.2
110273	4G2.5	11.4	29.6	9.6
110274	5G2.5	12.6	34.3	12.0
110275	7G2.5	13.8	41.6	16.8
4 mm²				
110278	3G4	11.8	33.9	11.5
110279	4G4	13.0	44.6	15.4
110280	5G4	14.4	52.3	19.2
6 mm²				
110283	4G6	15.7	60.3	23.0
110284	5G6	18.9	69.8	28.8
10 – 16 mm²				
110286	4G10	21.6	88.1	38.4
110287	4G16	25.2	122.1	61.4

CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

Silicon single conductor

LÜTZE SILICON SIF



Application

- In electrical devices with ambient temperatures up to +180°C
- In smelting works, steel works and rolling mills, cement, glass and ceramic industries
- In lighting and heating devices
- Flexibly usable for low temperatures
- Engines and ignition cables

Properties

- Temperature and hot air-resistant conductor
- Halogen-free, no burning transmission
- High dielectric strength
- The mechanical properties are reduced for running under air termination
- Resistant to high-molecular oils, plant and animal based greases, bases, salt solutions and diluted acids
- RoHS-compliant

Technical data

Voltage	
U	500 V
Test voltage	2000 V
Insulation resistance	min. 200 MΩ × km
Temperature range	
continuous	-60 °C to +180 °C
temporary	to +220 °C
Minimum bending radius	
moving	D × 7.5
fixed	D × 4
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2; DIN EN 50265-2-1; IEC 60332-1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Bare copper braid galvanised, fine stranded according to DIN VDE 0295 class 5 and IEC 60228 class 5
- Silicon conductor insulation
- Strand colour preferably black, additional colour upon request

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.25 – 150 mm²				
110528	0.25	1.6	0.5	0.2
110529	0.5	1.9	0.8	0.5
110530	0.75	2.2	1.1	0.7
110531	1	2.3	1.3	1.0
110532	1.5	2.7	1.8	1.4
110533	2.5	3.4	3.0	2.4
110534	4	4.0	4.5	3.3
110535	6	4.5	6.3	5.8
110549	10	6.8	11.9	9.6
110559	16	7.8	18.6	15.4
110551	25	9.7	28.7	24.0
110552	35	10.9	38.4	33.6
110553	50	13.6	55.0	48.0
110554	70	14.6	73.7	67.2
110555	95	18.0	101.5	91.2
110655	120	19.5	122.1	115.2
110558	150	21.6	152.1	144.0

Glass silk isolated high temperature single conductor

LÜTZE NICKEL BRAID GL



Application

- In electrical devices with ambient temperatures up to +400°C
- For stove and kiln engineering
- In smelting works, steel works and rolling mills, cement, glass and ceramic industries as well as chemical industries
- In lighting and heating devices

Properties

- very good electrical properties
- very good mechanical properties

Technical data

Voltage	
U	300 V
Test voltage	1500 V
Temperature range	
continuous	-60 °C to +350 °C
temporary	to +400 °C
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2; DIN EN 50265-2-1; IEC 60332-1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Multi-strand nickel wire
- Isolation:
 - separating foil
 - counter-running glass silk
 - Heat-resistant impregnation treatment
- Conductor colour beige

Part-No.	Number of strands/cross-section	Outer- \varnothing approx. mm	Weight kg/100 m
0.75 – 10 mm²			
110536	0.75	2.4	1.3
110537	1.0	2.7	1.5
110538	1.5	2.8	2.1
110539	2.5	3.4	3.3
110540	4	4.5	4.7
110541	6	4.9	6.6
110582	10	5.8	10.5

Fluoropolymer single conductors

LÜTZE PTFE single conductor LÜTZE FEP single conductor



Application

- In electrical devices with ambient temperatures up to +180°C or +260°C
- In smelting works, steel works and rolling mills, cement, glass and ceramic industries
- In lighting and heating devices
- Flexibly usable for low temperatures
- Engine and ignition cables
- Everywhere where the highest requirements are placed on the electrical, mechanical and chemical stability

Properties

- Non-flammable
- High isolation resistance and electrical dielectric strength with minimal wall thicknesses
- Small dielectric losses
- Absolute weathering and ozone resistance
- Resistant to high-molecular oils, plant and animal based greases, bases, salt solutions and diluted acids
- Free from paint wetting impairment substances (LABS-free)
- RoHS-compliant

Technical data

Voltage

U 600 V

Test voltage

2500 V

Insulation resistance

min. 2GΩ × km

Temperature range

PTFE -190°C to +280°C
temporary +300°C

FEP -100°C to +205°C
temporary +230°C

Minimum bending radius

moving D × 7.5
fixed D × 4

Burning behaviour


Flame-retardant according to
VDE 0482 T 265-2;
DIN EN 50265-2-1; IEC 60332-1

Design

- Bare copper wire multi-strand according to DIN VDE 0295
- Conductor insulation fluoropolymer
- Strand colour preferably black, additional colour upon request

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
PTFE single conductor				
111026	0.5	1.4	0.9	0.5
110313	0.75	1.7	1.1	0.7
111027	1.0	1.9	1.4	1.0
110315	1.5	2.2	2.0	1.4
110316	2.5	2.6	3.2	2.4
110785	4	3.3	4.9	3.8
110318	6	4.5	7.1	5.8
111028	10	5.8	12.4	9.6
111029	16	7.0	18.8	15.4
FEP single conductor				
110311	0.25	1.2	0.4	0.2
110312	0.5	1.4	0.9	0.5
110516	0.75	1.7	1.1	0.7
110314	1.0	1.9	1.4	1.0
110517	1.5	2.2	2.0	1.4
110518	2.5	2.6	3.2	2.4
110317	4	3.3	4.9	3.8
110519	6	4.5	7.1	5.8
110319	10	5.8	12.4	9.6
110320	16	7.0	18.8	15.4

9. Actuator - Sensor - Interface

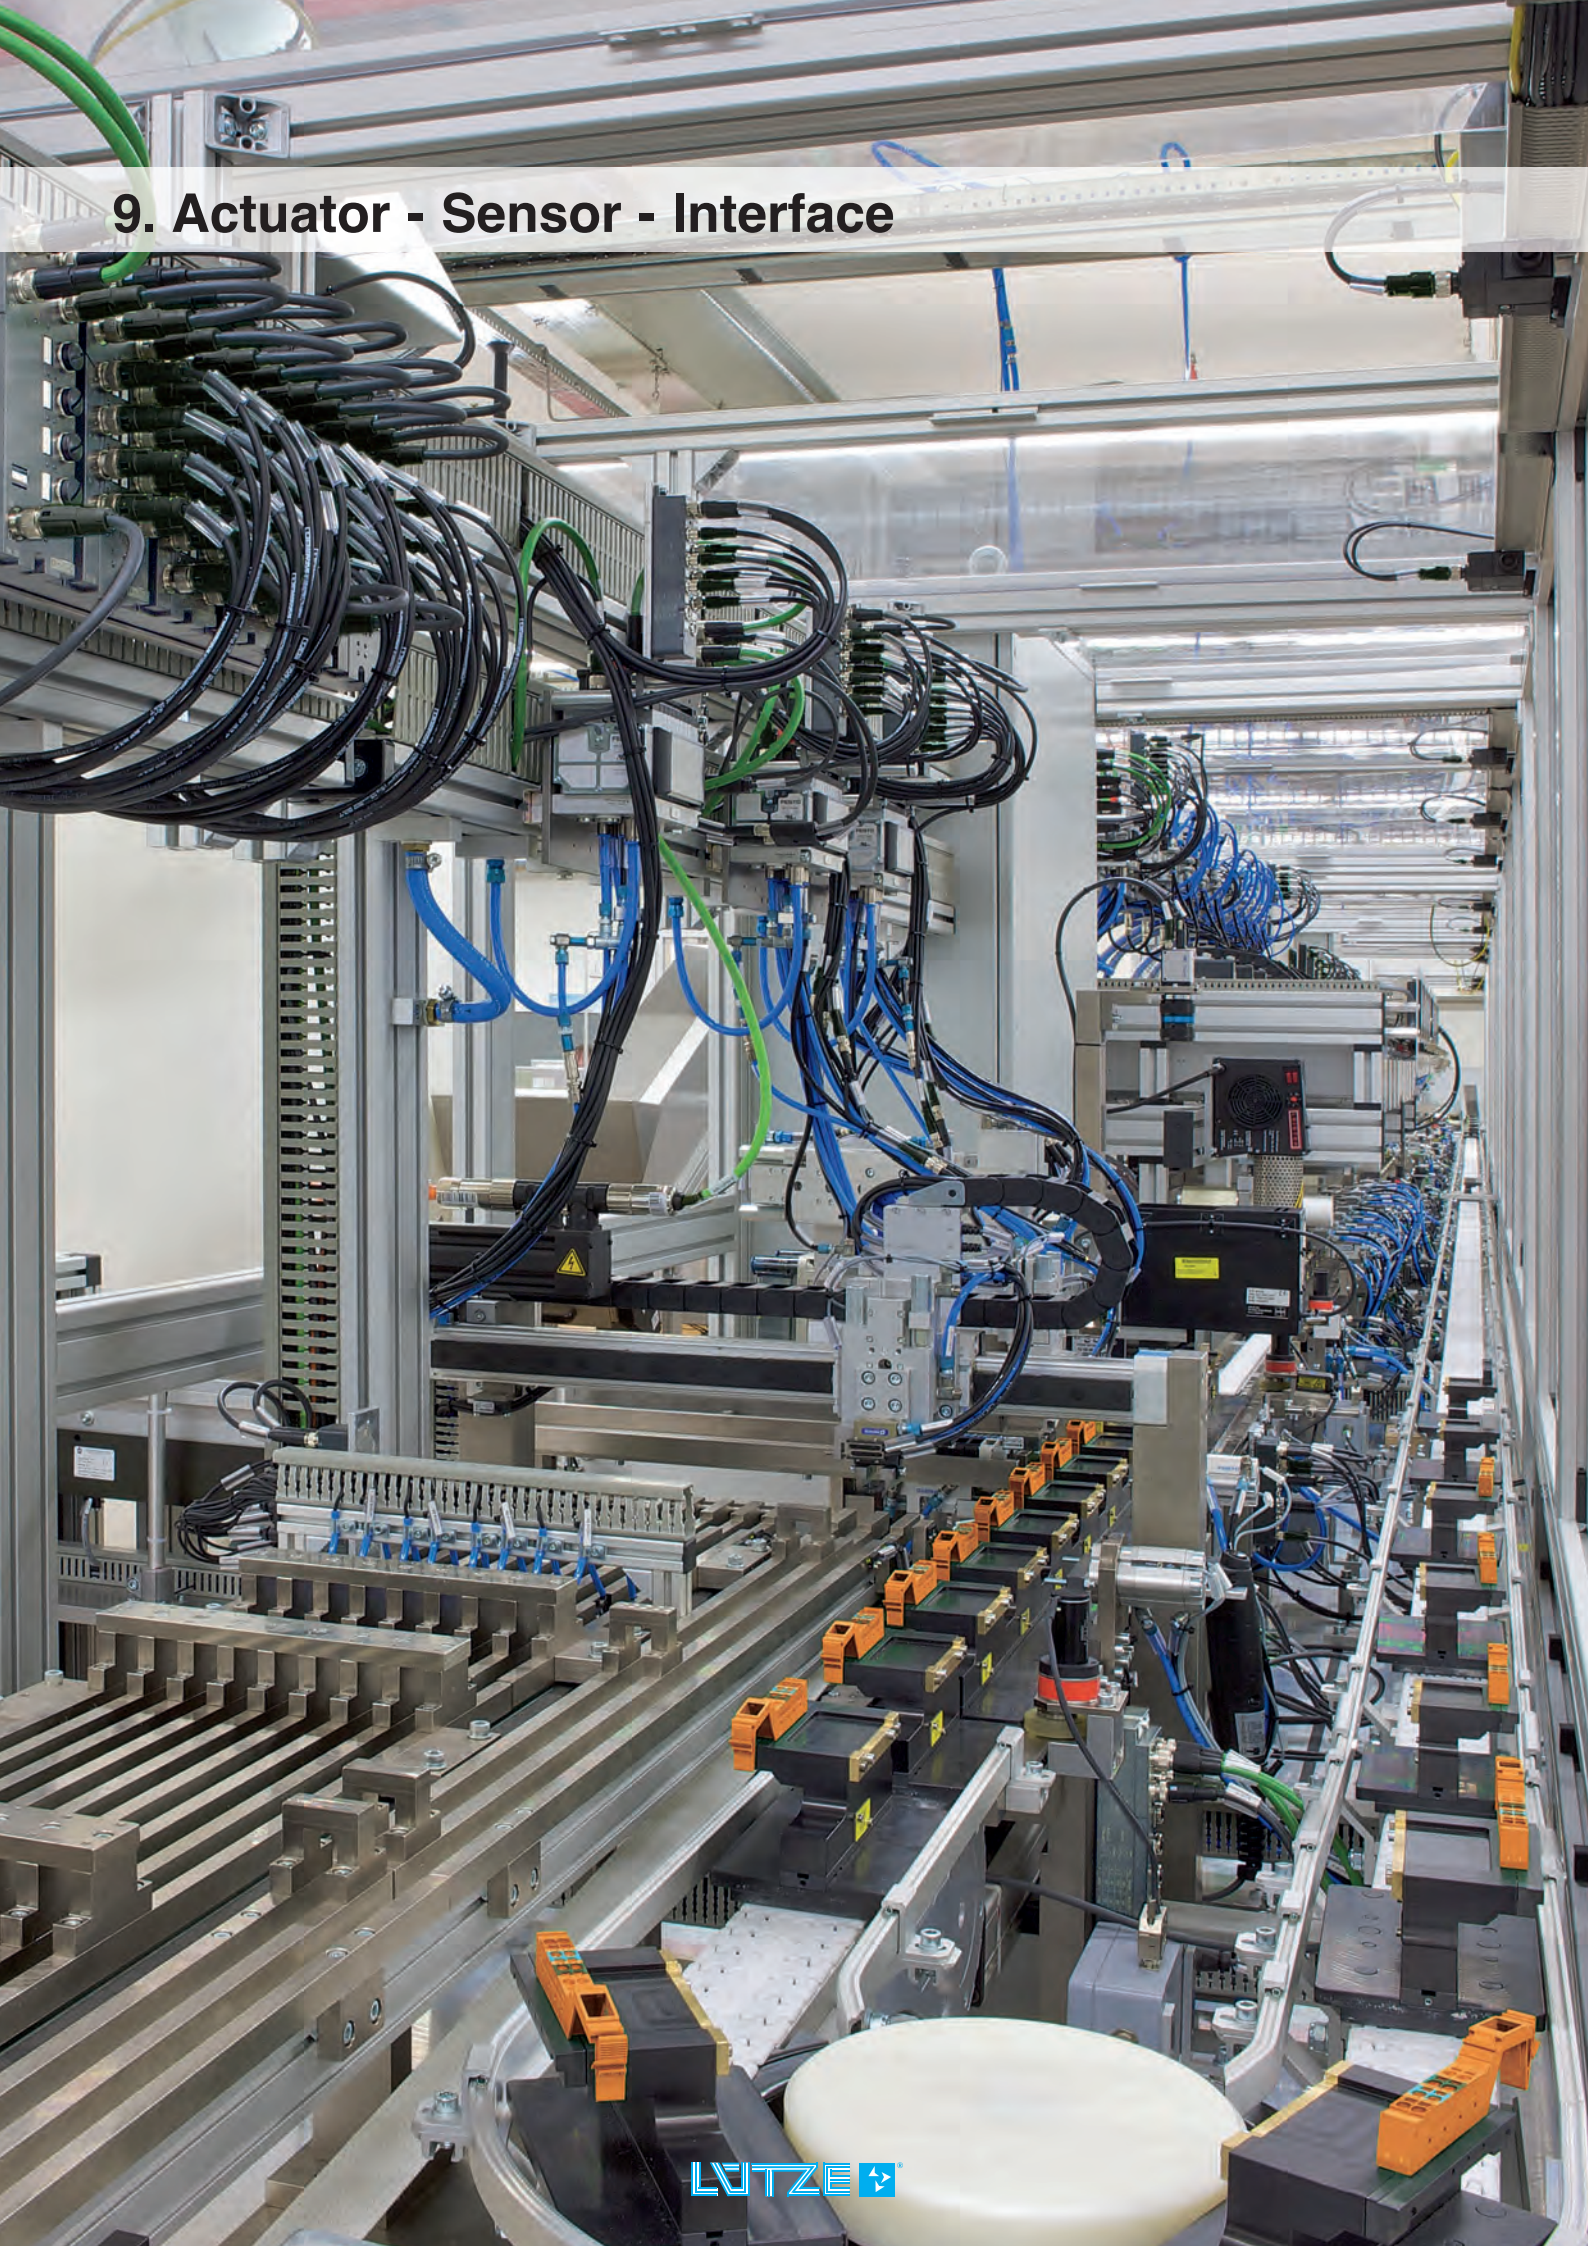

Actuator-Sensor-Interface · Overview



24 mm width



48 mm width, pluggable



60 mm width



60 mm width, pluggable



Stainless Steel Box



Fieldbus Cables

M8 / M12 Boxes IP68

Type	Number of Terminations				Plug-in positions					Termination		Cable length			Form		C-Track Type			Page				
	M8	M12	3pole	3pole + PE	4pole	4pole + PE	4x	6x	8x	10x	12x	fix cable	fix cable, rewirable	5,0m	10,0m	7,0m	24mm	48mm, pluggable	60mm		60mm, pluggable	Type A	Type B	Type C
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	up to 9.5
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	up to 9.7
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	up to 9.8
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	up to 9.10
M12-Box IP69k for food and beverage																							up to 9.12	

M12 Fieldbus Cables

FieldBus Type				Termination Side 1		Termination Side 2			Cable length										C-Track Type			Page	
CAN	DeviceNet	Ethernet	Profibus	Male straight	Female straight	Male straight	Female straight	Open end	0,3m	0,5m	0,6m	0,7m	0,8m	1,0m	1,5m	2,0m	5,0m	10,0m	Type A	Type B	Type C		
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.14
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.15
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.16
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.17
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.18
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.19
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.20
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.21
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.22
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.23
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.24

M8 M12 cable with open end

Type	Number of Terminations				Termination								Cable length			C-Track Type			Page				
	M8	M12	3pole	4pole	5pole	8pole	Male straight	Male straight shielded	Male angled	Male angled shielded	Female straight	Female straight shielded	Female angled	Female angled shielded	Female angled with LED	2,0m	5,0m	10,0m		Type A	Type B	Type C	
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.25
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.26
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.27
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.28
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.29
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.30
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.31
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	up to 9.32
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	up to 9.34
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	up to 9.36
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	up to 9.38
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	up to 9.40
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	up to 9.42
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	9.44

Actuator-Sensor-Interface · Overview



M8 to M8 Cables

Termination Side 1		Termination Side 2					Number of Term.		Cable length						C-Track Type			Page
Male straight	Male straight shielded	Female straight	Female straight shielded	Female angled	Female angled shielded	Female angled with LED	3pole	4pole	0,3m	0,6m	1,0m	1,5m	2,0m	5,0m	Type A	Type B	Type C	
•		•					•	•	•	•	•	•	•	•	•	•		9.45
•				•			•	•	•	•	•	•	•	•	•	•		9.46

M12 to M8 Cables

Termination Side 1		Termination Side 2					Number of Term.		Cable length						C-Track Type			Page
Male straight	Male straight shielded	Female straight	Female straight shielded	Female angled	Female angled shielded	Female angled with LED	3pole	4pole	0,3m	0,6m	1,0m	1,5m	2,0m	5,0m	Type A	Type B	Type C	
•		•					•		•	•	•	•	•	•	•	•		9.47

M12 to M12 Cables

Termination Side 1		Termination Side 2					Number of Term.		Cable length						C-Track Type			Page			
Male straight	Male straight shielded	Female straight	Female straight shielded	Female angled	Female angled shielded	Female angled with LED	3pole	4pole	5pole	8pole	0,3m	0,6m	1,0m	1,5m	2,0m	5,0m	Type A	Type B	Type C		
•		•					•	•	•	•	•	•	•	•	•	•	•	•	•		up to 9.48
•				•			•	•	•	•	•	•	•	•	•	•	•	•	•		up to 9.50
•						•	•	•	•	•	•	•	•	•	•	•	•	•	•		9.53
	•				•		•	•	•	•	•	•	•	•	•	•	•	•	•		up to 9.52

M12 to Valve plug cables

M12		Valve plug					Number		Cable length						Protection device	C-Track Type			Page	
Male straight		A	A - Pressure switch	B - DIN	Bl - Industry	C - DIN	Cl - Industry	3pole	5pole	0,3m	0,6m	1,0m	1,5m	2,0m	Varistor	Type A	Type B	Type C		
•		•	•				•	•	•	•	•	•	•	•	•	•	•	•		up to 9.54
•				•			•	•	•	•	•	•	•	•	•	•	•	•		9.56
•					•		•	•	•	•	•	•	•	•	•	•	•	•		9.57

Actuator-Sensor-Interface · Overview



M8 - Insulation displacement connection



M12 - Insulation displacement connection



Panel connector with wire



Panel connector USB



Panel connector RJ45



Wall bushing M12/ RJ45

M8 / M12 Connector

Type		Connection								Number of Termination				Connection		Code				Page
M8	M12	Male straight	Male angled	Male straight shielded	Female straight	Female angled	Female angled shielded	T-connector	3pole	4pole	5pole	8pole	Screw termination	Insulation displacement connection	A-coded	A-coded (CAN)	B-coded (Profibus, Interbus)	D-coded (Ethernet)		
.	9.58	
.	9.59	
.	9.60	
.	up to 9.62	
.	9.61	
.	9.64	
.	9.66	
.	9.67	
.	up to 9.68	
.	9.65	

Panel Connector

Type		Connection Side 1			Connection Side 2			Number of Termination				Code		Cable length					Category		Page						
M8	M12	USB 2.0	RJ45	Male	Female	Male	Female	Open end	3pole	4pole	5pole	8pole	A-coded	D-coded (Ethernet)	0,3m	0,5m	0,6m	0,8m	1,0m	1,5m	2,0m	3,0m	5,0m	Cat. 5e	Cat. 6		
.	9.70
.	9.71
.	9.72
.	9.73
.	9.74
.	9.75

Accessories

Type		Other		Page
M8	M12	protection cap	Identification unit	
.	.	.	.	9.76
.	.	.	.	9.77

Characteristics: (Typ A + B + C) PUR halogen-free for extreme demands

- high chemical resistance
- high resistance against oil and lubricants
- high abrasion firmness
- halogen-free
- silicone-free, freely of lacquer-wetting-disturbing substances
- microbe and hydrolysis resistant
- good UV stability

C-Track Type


	Type A	Type B	Type C
Bending cycles min.	5 Mio	4 Mio	2 Mio
Minimum bending radius	10 x D	10 x D	10 x D
Traverse path	10 m	10 m	5 m
Acceleration	7 m/s ²	10 m/s ²	5 m/s ²
Speed	3 m/s	3 m/s	3 m/s

Actuator sensor interface - M8 - Actuator sensor box IP 68


M 8 – Actuator sensor boxes – IP 68 with LED indication and connected PUR cable
4-way, 6-way, 8-way / 3-pole
c-track compatible




Dimensions



	L	B +0.1 -0.1	C +0.1 -0.1
4xM8	92	85	68,5
6xM8	118	111	94,5
8xM8	144	137	120,5
10xM8	170	163	146,5
12xM8	196	189	172,5



PIN assignment

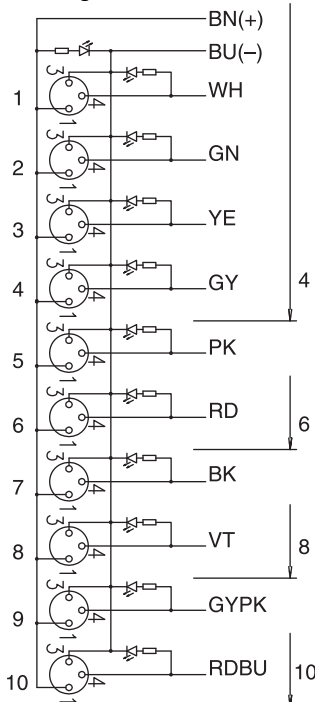

Description	Part-No.	Type	PU	
Slots	4-way	493005	BOX-M8-3L4S 5m PUR	1
	4-way	493010	BOX-M8-3L4S 10m PUR	1
	6-way	493105	BOX-M8-3L6S 5m PUR	1
	6-way	493110	BOX-M8-3L6S 10m PUR	1
	8-way	493205	BOX-M8-3L8S 5m PUR	1
	8-way	493810	BOX-M8-3L8S 10m PUR	1

Technical data	4-way, 5m	4-way, 10m	6-way, 5m	6-way, 10m	8-way, 5m	8-way, 10m
Nominal voltage	DC 24 V					
Nominal voltage range	10 – 30 V					
Rated current	max. 2A per channel					
Amperage range	max. total 7.5 A					
Number of terminations	3-pole					
Slots	4-way		6-way		8-way	
Cable length (m)	5.0	10.0	5.0	10.0	5.0	10.0
Status Indication	Supply: 1 x LED green, I/O: each 1 x LED yellow					
Current Consumption per LED	< 10mA / LED					
Coding	-					
Shielding	-					
General						
Form	M8 x 1, connector					
Rated insulation voltage (EN 50178)	32 V					
Test voltage	1.0 kV					
Pollution degree	3					
Insulation resistance	> 10 ⁹ Ω					
Contact resistance	< 5 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 68, in screwed condition					
Housing material	PBT grey					
Contact material	CuZn, gold-plated					
Thread material	CuSn nickel plated					
Gasket	Viton					
Cable construction	2x0.75 + 4x0.34 mm ²		2x0.75 + 6x0.34 mm ²		2x0.75 + 8x0.34 mm ²	
Cable jacket	PUR					
Conductor insulation	PP coloured					
Cable diameter	7.0 mm		7.2 mm		7.4 mm	
Bending radius	fixed: 4 x D, cable track: 10 x D					
Termination	-					
Storage temperature range	-40 °C – 90 °C					
Operation temperature range	-20 °C – 80 °C					
Temperature range cable fixed	-40 °C – 80 °C					
Temperature range cable moving	-5 °C – 80 °C					
Dimensions (w x h x d)	24.0 x 18.2 x 92.0 mm		24.0 x 18.2 x 118.0 mm		24.0 x 18.2 x 144.0 mm	
Weight (kg/piece)	0.620	1.200	0.680	1.300	0.740	1.400
Approvals	UL, CSA					


Accessories	Article number	Type	PU
Protective cover M8	499989	SK M8	50

Actuator sensor interface - M8 - Actuator sensor box IP 68

M 8 – Actuator sensor boxes – IP 68 with LED indication and connected PUR cable
 10-way, 12-way / 3-pole
 c-track compatible




Dimensions



	L	B ^{+0.1} _{-0.1}	C ^{+0.1} _{-0.1}
4xM8	92	85	68,5
6xM8	118	111	94,5
8xM8	144	137	120,5
10xM8	170	163	146,5
12xM8	196	189	172,5

PIN assignment

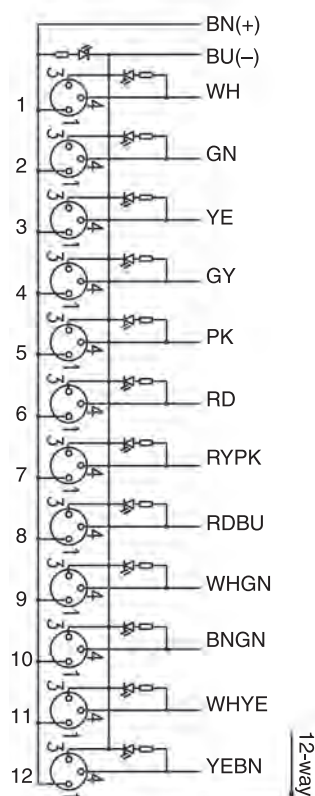

Description	Part-No.	Type	PU
Slots			
10-way	493305	BOX-M8-3L10S 5m PUR	1
10-way	493310	BOX-M8-3L10S 10m PUR	1
12-way	493405	BOX-M8-3L12S 5m PUR	1
12-way	493410	BOX-M8-3L12S 10m PUR	1

Technical data	10-way, 5m	10-way, 10m	12-way, 5m	12-way, 10m
Nominal voltage	DC 24 V			
Nominal voltage range	10 – 30 V			
Rated current	max. 2A per channel			
Amperage range	max. total 7.5 A			
Number of terminations	3-pole			
Slots	10-way		12-way	
Cable length (m)	5.0	10.0	5.0	10.0
Status Indication	Supply: 1 x LED green, I/O: each 1 x LED yellow			
Current Consumption per LED	< 10mA / LED			
Coding	-			
Shielding	-			
General				
Form	M8 x 1, connector			
Rated insulation voltage (EN 50178)	32 V			
Test voltage	1.0 kV			
Pollution degree	3			
Insulation resistance	> 10 ⁹ Ω			
Contact resistance	< 5 mΩ			
Class of flammability according to UL 94	V0			
Protection class	IP 68, in screwed condition			
Housing material	PBT grey			
Contact material	CuZn, gold-plated			
Thread material	CuSn nickel plated			
Gasket	Viton			
Cable construction	2x0.75 + 10x0.34 mm ²		2x0.75 + 12x0.34 mm ²	
Cable jacket	PUR			
Conductor insulation	PP coloured			
Cable diameter	7.6 mm		7.7 mm	
Bending radius	fixed: 4 x D, cable track: 10 x D			
Termination	-			
Storage temperature range	-40 °C – 90 °C			
Operation temperature range	-20 °C – 80 °C			
Temperature range cable fixed	-40 °C – 80 °C			
Temperature range cable moving	-5 °C – 80 °C			
Dimensions (w x h x d)	24.0 x 18.2 x 170.0 mm		24.0 x 18.2 x 196.0 mm	
Weight (kg/piece)	0.810	1.580	0.830	1.600
Approvals	UL, CSA			



Accessories	Article number	Type	PU
Protective cover M8	499989	SK M8	50

Actuator sensor interface - M8 - Actuator sensor box IP 68


M 8 – Actuator sensor boxes – IP 68 with LED indication 8-way / 3-pole, wireable



Dimensions



PIN assignment

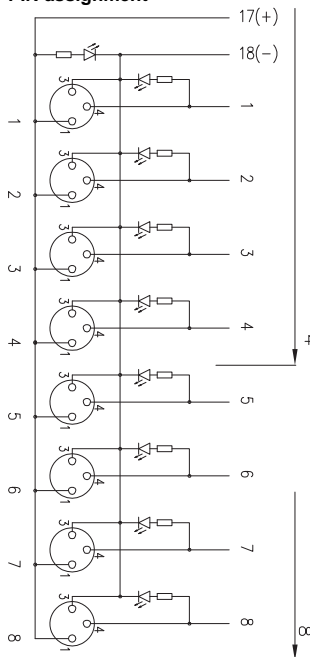


Description	Part-No.	Type	PU
8-way			
Slots	8-way	491000	BOX-M8-3H8
			1
Technical data			
		8-way	
Nominal voltage		DC 24 V	
Nominal voltage range		10 – 30 V	
Rated current		max. 2A per channel	
Amperage range		max. total 7.5 A	
Number of terminations		3-pole	
Slots		8-way	
Cable length (m)		–	
Status Indication		Supply: 1 x LED green, I/O: each 1 x LED yellow	
Current Consumption per LED		< 10mA / LED	
Coding		–	
Shielding		–	
General			
Form		M8 x 1, connector	
Rated insulation voltage (EN 50178)		32 V	
Test voltage		1.0 kV	
Pollution degree		3	
Insulation resistance		> 10 ⁹ Ω	
Contact resistance		< 5 mΩ	
Class of flammability according to UL 94		V0	
Protection class		IP 68, in screwed condition	
Housing material		PBT grey	
Contact material		CuZn, gold-plated	
Thread material		CuSn nickel plated	
Gasket		Viton	
Cable construction		–	
Cable jacket		–	
Conductor insulation		–	
Cable diameter		10 – 14 mm	
Bending radius		–	
Termination		Screw terminal: 0,08 – 1.5 mm ²	
Storage temperature range		-40 °C – 90 °C	
Operation temperature range		-20 °C – 80 °C	
Temperature range cable fixed		-40 °C – 80 °C	
Temperature range cable moving		-5 °C – 80 °C	
Dimensions (w x h x d)		48.0 x 65.0 x 135.0 mm	
Weight (kg/piece)		0.220	
Approvals		UL, CSA	
Accessories			
Protective cover M8	499989	SK M8	50
Cable for 491000	110872	3G1.0 8x0.34	

Actuator sensor interface - M12 - Actuator sensor box IP 68


M 12 – Actuator sensor boxes – IP 68 with LED indication and connected PUR cable
 4-way, 8-way / 3-pole + PE
 c-track compatible



Dimensions



PIN assignment

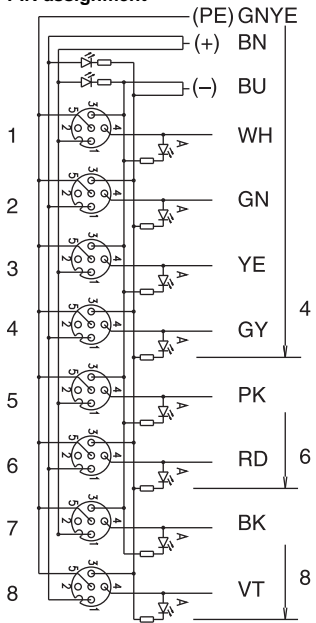

Description	Part-No.	Type	PU	
Slots	4-way	400050	BOX-M12 3L4 5m PUR	1
	4-way	400100	BOX-M12 3L4 10m PUR	1
	8-way	402050	BOX-M12 3L8 5m PUR	1
	8-way	402100	BOX-M12 3L8 10m PUR	1


Technical data	4-way, 5m	4-way, 10m	8-way, 5m	8-way, 10m
Nominal voltage	DC 24 V			
Nominal voltage range	10 – 30 V			
Rated current	max. 2A per channel			
Amperage range	max. total 12 A			
Number of terminations	3-pole + PE			
Slots	4-way		8-way	
Cable length (m)	5.0	10.0	5.0	10.0
Status Indication	Supply: 2 x LED green, I/O: each 1 x LED yellow			
Current Consumption per LED	< 10 mA / LED			
Coding	A			
Shielding	-			
General				
Form	M12 x 1, connector			
Rated insulation voltage (EN 50178)	32 V			
Test voltage	1.0 kV			
Pollution degree	3			
Insulation resistance	> 10 ⁹ Ω			
Contact resistance	< 5 mΩ			
Class of flammability according to UL 94	V0			
Protection class	IP 68, in screwed condition			
Housing material	PBT grey			
Contact material	CuZn, gold-plated			
Thread material	CuSn nickel plated			
Gasket	Viton			
Cable construction	3x1.0 + 4x0.34 mm ²		3x1.0 + 8x0.34 mm ²	
Cable jacket	PUR			
Conductor insulation	PP coloured			
Cable diameter	7.5 mm		8.2 mm	
Bending radius	fixed: 4 x D, cable track: 10 x D			
Termination	-			
Storage temperature range	-40 °C – 90 °C			
Operation temperature range	-20 °C – 80 °C			
Temperature range cable fixed	-40 °C – 80 °C			
Temperature range cable moving	-5 °C – 80 °C			
Dimensions (w x h x d)	60.0 x 25.0 x 102.0 mm		60.0 x 25.0 x 152.0 mm	
Weight (kg/piece)	0.860	1.660	1.160	1.940
Approvals	UL, CSA			
Accessories	Article number	Type	PU	
protective cover M12	499994	SK M12	50	
T-junction M12 on 2 x M12	490026	T-connector M12/M12	10	
T-junction M12 on 2 x M8	490038	T-connector M12/M8	10	

Actuator sensor interface - M12 - Actuator sensor box IP 68


M 12 – Actuator sensor boxes – IP 68 with LED indication and connected PUR cable
 4-way, 8-way / 4-pole + PE
 c-track compatible



Dimensions



PIN assignment

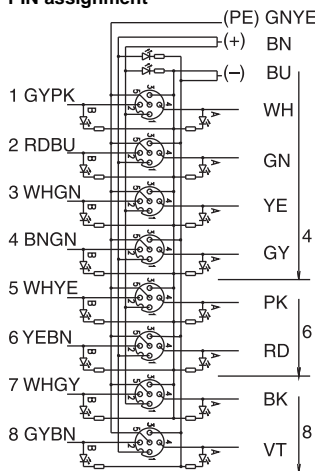

Description	Part-No.	Type	PU	
Slots	4-way	407050	BOX-M12 4L4 5m PUR	1
	4-way	407100	BOX-M12 4L4 10m PUR	1
	8-way	409050	BOX-M12 4L8 5m PUR	1
	8-way	409100	BOX-M12 4L8 10m PUR	1

Technical data	4-way, 5m	4-way, 10m	8-way, 5m	8-way, 10m
Nominal voltage	DC 24 V			
Nominal voltage range	10 – 30 V			
Rated current	max. 2A per channel			
Amperage range	max. total 12 A			
Number of terminations	4-pole + PE			
Slots	4-way		8-way	
Cable length (m)	5.0	10.0	5.0	10.0
Status Indication	Supply: 2 x LED green, I/O: each 1 x LED yellow			
Current Consumption per LED	< 10 mA / LED			
Coding	A			
Shielding	-			

General				
Form	M12 x 1, connector			
Rated insulation voltage (EN 50178)	32 V			
Test voltage	1.0 kV			
Pollution degree	3			
Insulation resistance	> 10 ⁹ Ω			
Contact resistance	< 5 mΩ			
Class of flammability according to UL 94	V0			
Protection class	IP 68, in screwed condition			
Housing material	PBT grey			
Contact material	CuZn, gold-plated			
Thread material	CuSn nickel plated			
Gasket	Viton			
Cable construction	3x1.0 + 8x0.34 mm ²		3x1.0 + 16x0.34 mm ²	
Cable jacket	PUR			
Conductor insulation	PP coloured			
Cable diameter	8.2 mm		9.7 mm	
Bending radius	fixed: 4 x D, cable track: 10 x D			
Termination	-			
Storage temperature range	-40 °C – 90 °C			
Operation temperature range	-20 °C – 80 °C			
Temperature range cable fixed	-40 °C – 80 °C			
Temperature range cable moving	-5 °C – 80 °C			
Dimensions (w x h x d)	60.0 x 25.0 x 102.0 mm		60.0 x 25.0 x 152.0 mm	
Weight (kg/piece)	0.860	1.560	1.160	1.940
Approvals	UL, CSA			


Accessories	Article number	Type	PU
protective cover M12	499994	SK M12	50
T-junction M12 on 2 x M12	490026	T-connector M12/M12	10
T-junction M12 on 2 x M8	490038	T-connector M12/M8	10

Actuator sensor interface - M12 - Actuator sensor box IP 68


M 12 – Actuator sensor boxes – IP 68 with LED indication 4-way, 8-way / 3-pole + PE, wireable



Dimensions



PIN assignment

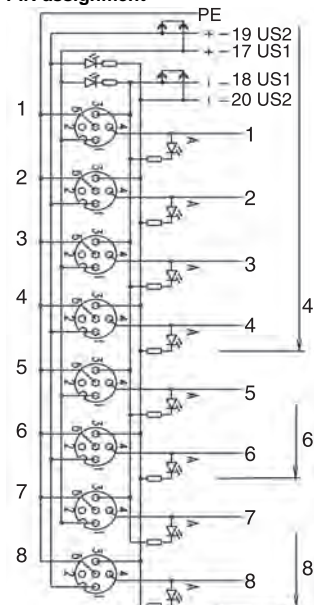

Description	Part-No.	Type	PU	
Slots	4-way	491002	BOX-M12-3H4	1
	8-way	491004	BOX-M12-3H8	1


Technical data	4-way	8-way	
Nominal voltage		DC 24 V	
Nominal voltage range		10 – 30 V	
Rated current		max. 2A per channel	
Amperage range	max. total: 10A with single power supply, 2 x 8A with dual power supply		
Number of terminations	3-pole + PE		
Slots	4-way	8-way	
Cable length (m)	-		
Status Indication	Supply: 2 x LED green, I/O: each 1 x LED yellow		
Current Consumption per LED	< 10 mA / LED		
Coding	A		
Shielding	-		
General			
Form	M12 x 1, connector		
Rated insulation voltage (EN 50178)	32 V		
Test voltage	1.0 kV		
Pollution degree	3		
Insulation resistance	> 10 ⁹ Ω		
Contact resistance	< 5 mΩ		
Class of flammability according to UL 94	V0		
Protection class	IP 68, in screwed condition		
Housing material	PBT grey		
Contact material	CuZn, gold-plated		
Thread material	CuSn nickel plated		
Gasket	Viton		
Cable construction	-		
Cable jacket	-		
Conductor insulation	-		
Cable diameter	6 – 12 mm		
Bending radius	-		
Termination	Screw terminal: 0.08 – 1.5 mm ²		
Storage temperature range	-40 °C – 90 °C		
Operation temperature range	-20 °C – 80 °C		
Temperature range cable fixed	-40 °C – 80 °C		
Temperature range cable moving	-5 °C – 80 °C		
Dimensions (w x h x d)	60.0 x 41.5 x 102.0 mm	60.0 x 41.5 x 152.0 mm	
Weight (kg/piece)	0.200	0.280	
Approvals	UL, CSA		
Accessories	Article number	Type	PU
protective cover M12	499994	SK M12	50
T-junction M12 on 2 x M12	490026	T-connector M12/M12	10
T-junction M12 on 2 x M8	490038	T-connector M12/M8	10
Cable for 491002	110870	3G1.0 +4x0.34	
Cable for 491004	110872	3G1.0 8x0.34	

Actuator sensor interface - M12 - Actuator sensor box IP 68


M 12 – Actuator sensor boxes – IP 68 with LED indication 4-way, 8-way / 4-pole + PE, wireable



Dimensions



PIN assignment

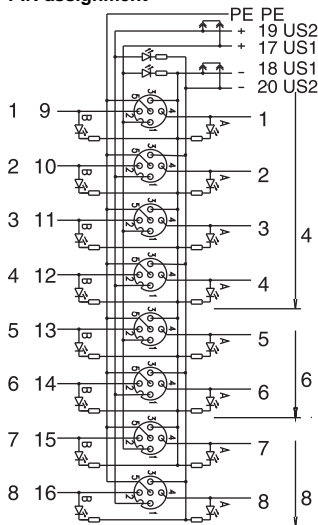

Description	Part-No.	Type	PU	
Slots	4-way	491003	BOX-M12-4H4	1
	8-way	491005	BOX-M12-4H8	1

Technical data	4-way	8-way
Nominal voltage	DC 24 V	
Nominal voltage range	10 – 30 V	
Rated current	max. 2A per channel	
Amperage range	max. total: 10A with single power supply, 2 x 8A with dual power supply	
Number of terminations	4-pole + PE	
Slots	4-way	8-way
Cable length (m)	-	
Status Indication	Supply: 2 x LED green, I/O: each 1 x LED yellow	
Current Consumption per LED	< 10 mA / LED	
Coding	A	
Shielding	-	

General	
Form	M12 x 1, connector
Rated insulation voltage (EN 50178)	32 V
Test voltage	1.0 kV
Pollution degree	3
Insulation resistance	> 10 ⁹ Ω
Contact resistance	< 5 mΩ
Class of flammability according to UL 94	V0
Protection class	IP 68, in screwed condition
Housing material	PBT grey
Contact material	CuZn, gold-plated
Thread material	CuSn nickel plated
Gasket	Viton
Cable construction	-
Cable jacket	-
Conductor insulation	-
Cable diameter	6 – 12 mm
Bending radius	-
Termination	Screw terminal: 0,08 – 1.5 mm ²
Storage temperature range	-40 °C – 90 °C
Operation temperature range	-20 °C – 80 °C
Temperature range cable fixed	-40 °C – 80 °C
Temperature range cable moving	-5 °C – 80 °C
Dimensions (w x h x d)	60.0 x 41.5 x 102.0 mm 60.0 x 41.5 x 152.0 mm
Weight (kg/piece)	0.200 0.280
Approvals	UL, CSA


Accessories	Article number	Type	PU
protective cover M12	499994	SK M12	50
T-junction M12 on 2 x M12	490026	T-connector M12/M12	10
T-junction M12 on 2 x M8	490038	T-connector M12/M8	10
Cable for 491003	110872	3G1.0 8x0.34	
Cable for 491005	110874	3G1.0 16x0.34	

Actuator sensor interface - M12 - Actuator sensor box IP 69 K


Actuator sensor box 8-gang, M12 female, stainless steel housing with diagnostic function for the food industry with function and diagnostic indicator fixed connection PVC cable, line end open



Dimensions

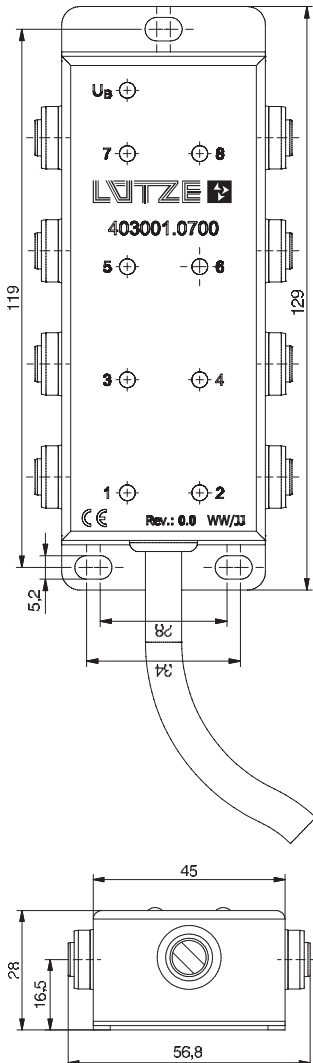


Pin layout



Description	Part-No.	Type	PU	
Slots	8	403001.0700	Box-M12-4L8FB 7,0 PVC	1
Technical data				
4-pole				
Nominal voltage	DC 24 V			
Nominal voltage range	DC 24 V -15 % / +20 % V			
Rated current	max. 100 mA per signal input, max. 700 mA diagnostic signal			
Amperage range	max. total 1.5 A			
Number of terminations	4			
Slots	8			
Cable length (m)	7.0			
Status Indication	Supply: 1 x LED green, signal input: per 1 x LED yellow, diagnosis: per 1 x LED red			
Current Consumption per LED	< 10 mA / LED			
Coding	A			
Shielding	-			
General				
Form	M12 x 1, connector			
Rated insulation voltage (EN 50178)	32 V			
Test voltage	-			
Pollution degree	2			
Insulation resistance	> 100 MΩ			
Contact resistance	< 5 mΩ			
Class of flammability according to UL 94	-			
Protection class	IP 69K, in screwed condition			
Housing material	Stainless steel 1.4404			
Contact material	CuSn, gold-plated			
Thread material	Stainless steel 1.4404			
Gasket	Viton			
Cable construction	3 x 0.75 mm ² + 9 x 0.34 mm ²			
Cable jacket	PVC			
Conductor insulation	PVC			
Cable diameter	7.8 mm ± 0.2 mm			
Bending radius	Fixed: 4 x D, moving: 7.5 x D			
Termination	-			
Storage temperature range	-25 °C – 70 °C			
Operation temperature range	-25 °C – 70 °C			
Temperature range cable fixed	-30 °C – 90 °C			
Temperature range cable moving	-15 °C – 90 °C			
Dimensions (w x h x d)	56.2 x 28.0 x 129.0 mm			
Weight (kg/piece)	1.150			
Approvals	-			

Simplified circuit diagram



Connection assignment


brown	= + 24V
blue	= GND 0V
yellow/green	= PE housing
withe	slot 1 / PIN 4 signal
green	slot 2 / PIN 4 signal
yellow	slot 3 / PIN 4 signal
grey	slot 4 / PIN 4 signal
pink	slot 5 / PIN 4 signal
red	slot 6 / PIN 4 signal
black	slot 7 / PIN 4 signal
violet	slot 8 / PIN 4 signal
brown/withe	diagnostic signal low active

Actuator sensor interface - M12 - connector


Terminating resistor 33 kΩ / 0.125 Watt
Plug M12 4pin. straight, A coded
Housing material PVC black



Dimensions

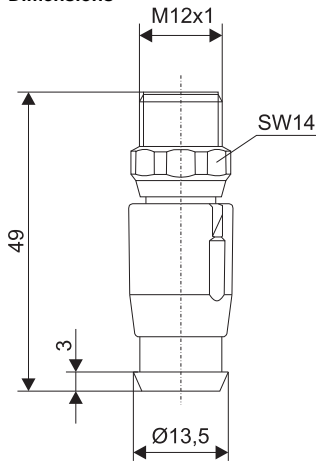

Circuit diagram

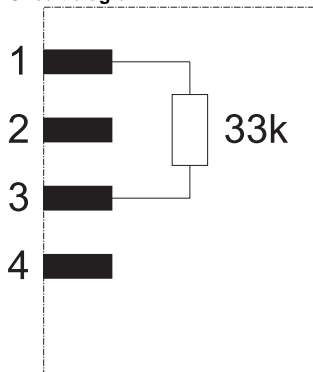

Pin layout




Description	Part-No.	Type	PU
Male			
Number of terminations	4	490127	1
Technical data			
		Male	
Nominal voltage	AC/DC 24 V		
Nominal voltage range	max. 60 V		
Rated current	1 A		
Number of terminations	4		
Cable length (m)	-		
Status Indication	-		
Current Consumption per LED	-		
Coding	A		
Shielding	-		
General			
Form	M12 x 1, male		
Rated insulation voltage (EN 50178)	60 V		
Test voltage	-		
Pollution degree	3/2		
Insulation resistance	≥100 MΩ		
Contact resistance	-		
Class of flammability according to UL 94	-		
Protection class	IP 67, in screwed condition		
Housing material	TPE black		
Contact material	Copper zinc, gold-plated		
Thread material	Stainless steel 1.4404		
Gasket	-		
Cable construction	-		
Cable jacket	-		
Conductor insulation	-		
Cable diameter	-		
Bending radius	-		
Storage temperature range	-25 °C – 80 °C		
Temperature range connector	-25 °C – 70 °C		
Termination	-		
Mechanical service life	≥ 100 insertion cycles		
Weight (kg/piece)	0.013		
Approvals	-		

Actuator sensor interface - CANopen field bus cables


Male M12 straight with PUR cable, shielded 360°, open end self-locking screwed connection
c-track compatible, halogen free




Dimensions



PIN assignment



Circuit diagram



Description	Part-No.	Type	PU	
Cable length (m)	2.0	475702	STG5-M12/CAN 2M-PUR	10
	5.0	475705	STG5-M12/CAN 5M-PUR	10
	10.0	475710	STG5-M12/CAN 10M-PUR	10

Technical data

Nominal voltage	AC/DC 24 V		
Nominal voltage range	max. 30 V		
Rated current	4 A		
Number of terminations	5		
Cable length (m)	2.0	5.0	10.0
Status Indication	-		
Current Consumption per LED	-		
Coding	A		
Shielding	360°		

General

Form	M12 x 1, male straight		
Rated insulation voltage (EN 50178)	60 V		
Test voltage	1.5 kV		
Pollution degree	3		
Insulation resistance	>10 ⁹ Ω		
Contact resistance	< 5 mΩ		
Class of flammability according to UL 94	V0		
Protection class	IP 67, in screwed condition		
Housing material	TPU black		
Contact material	CuSn, gold plated nickel		
Thread material	Zinc die-casting, nickel-plated		
Gasket	-		
Cable construction	2 x AWG 22/19 + 2 x AWG 24/19 + Drainwire AWG 22/19		
Cable jacket	PUR, RAL 4001 violet		
Conductor insulation	Shield, blue, white, red, black		
Cable diameter	6.7 mm		
Bending radius	15 x cable diameter		
Storage temperature range	-40 °C – 90 °C		
Temperature range connector	-25 °C – 90 °C		
Temperature range cable fixed	-40 °C – 80 °C		
Temperature range cable moving	-20 °C – 75 °C		
Mechanical service life	-		
Weight (kg/piece)	0.135	0.305	0.605

Approvals the cable is UL, CSA certified 80° 300V


Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Actuator sensor interface - CANopen field bus cables

**Female M12 straight with PUR cable, shielded 360°, open end self-locking screwed connection
c-track compatible, halogen free**




Dimensions



PIN assignment



Circuit diagram



Description	Part-No.	Type	PU	
Cable length (m)	2.0	475802	KUG5-M12/CAN 2M-PUR	10
	5.0	475805	KUG5-M12/CAN 5M-PUR	10
	10.0	475810	KUG5-M12/CAN 10M-PUR	10

Technical data

Nominal voltage	AC/DC 24 V		
Nominal voltage range	max. 30 V		
Rated current	4 A		
Number of terminations	5		
Cable length (m)	2.0	5.0	10.0
Status Indication	-		
Current Consumption per LED	-		
Coding	A		
Shielding	360°		

General

Form	M12 x 1, female straight		
Rated insulation voltage (EN 50178)	60 V		
Test voltage	1.5 kV		
Pollution degree	3		
Insulation resistance	>10 ⁹ Ω		
Contact resistance	< 5 mΩ		
Class of flammability according to UL 94	V0		
Protection class	IP 67, in screwed condition		
Housing material	TPU black		
Contact material	CuSn, gold plated nickel		
Thread material	Zinc die-casting, nickel-plated		
Gasket	NBR		
Cable construction	2 x AWG 22/19 + 2 x AWG 24/19 + Drainwire AWG 22/19		
Cable jacket	PUR, RAL 4001 violet		
Conductor insulation	Shield, blue, white, red, black		
Cable diameter	6.7 mm		
Bending radius	15 x cable diameter		
Storage temperature range	-40 °C – 90 °C		
Temperature range connector	-25 °C – 90 °C		
Temperature range cable fixed	-40 °C – 80 °C		
Temperature range cable moving	-20 °C – 75 °C		
Mechanical service life	-		
Weight (kg/piece)	0.135	0.305	0.605

Approvals the cable is UL, CSA certified 80° 300V


Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Actuator sensor interface - CANopen field bus cables


Male-female M12 straight with PUR cable, shielded 360°
self-locking screwed connection
c-track compatible, halogen free




Dimensions



PIN assignment



Circuit diagram



Description	Part-No.	Type	PU
Cable length (m)	0.3	475903	STG5-M12/KUG5-M12/CAN 0,3M-PUR 10
	0.5	475905	STG5-M12/KUG5-M12/CAN 0,5M-PUR 10
	1.0	475910	STG5-M12/KUG5-M12/CAN 1,0M-PUR 10
	1.5	475915	STG5-M12/KUG5-M12/CAN 1,5M-PUR 10
	2.0	475920	STG5-M12/KUG5-M12/CAN 2,0M-PUR 10
	3.0	475930	STG5-M12/KUG5-M12/CAN 3,5M-PUR 10
	5.0	475950	STG5-M12/KUG5-M12/CAN 5,0M-PUR 10

Technical data

Nominal voltage	AC/DC 24 V						
Nominal voltage range	max. 30 V						
Rated current	4 A						
Number of terminations	5						
Cable length (m)	0.3	0.5	1.0	1.5	2.0	3.0	5.0
Status Indication	-						
Current Consumption per LED	-						
Coding	A						
Shielding	360°						

General

Form	M12 x 1, male - female straight						
Rated insulation voltage (EN 50178)	60 V						
Test voltage	1.5 kV						
Pollution degree	3						
Insulation resistance	>10 ⁹ Ω						
Contact resistance	< 5 mΩ						
Class of flammability according to UL 94	V0						
Protection class	IP 67, in screwed condition						
Housing material	TPU black						
Contact material	CuSn, gold plated nickel						
Thread material	Zinc die-casting, nickel-plated						
Gasket	NBR (female)						
Cable construction	2 x AWG 22/19 + 2 x AWG 24/19 + Drainwire AWG 22/19						
Cable jacket	PUR, RAL 4001 violet						
Conductor insulation	Shield, blue, white, red, black						
Cable diameter	6.7 mm						
Bending radius	15 x cable diameter						
Storage temperature range	-40 °C – 90 °C						
Temperature range connector	-25 °C – 90 °C						
Temperature range cable fixed	-40 °C – 80 °C						
Temperature range cable moving	-20 °C – 75 °C						
Mechanical service life	-						
Weight (kg/piece)	0.055	0.070	0.100	0.125	0.150	0.230	0.315
Approvals	the cable is UL, CSA certified 80° 300V						


Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Actuator sensor interface - DeviceNet field bus cables


**Male M12 straight with PUR cable, shielded 360°, open end self-locking screwed connection
c-track compatible, halogen free**




Dimensions



PIN assignment



Circuit diagram



Description	Part-No.	Type	PU	
Cable length (m)	2.0	496702	STG5-M12/DN 2M-PUR	10
	5.0	496705	STG5-M12/DN 5M-PUR	10
	10.0	496710	STG5-M12/DN 10M-PUR	10

Technical data

Nominal voltage	AC/DC 24 V		
Nominal voltage range	max. 30 V		
Rated current	4 A		
Number of terminations	5		
Cable length (m)	2.0	5.0	10.0
Status Indication	-		
Current Consumption per LED	-		
Coding	A		
Shielding	360°		

General

Form	M12 x 1, male straight		
Rated insulation voltage (EN 50178)	60 V		
Test voltage	1.5 kV		
Pollution degree	3		
Insulation resistance	>10 ⁹ Ω		
Contact resistance	< 5 mΩ		
Class of flammability according to UL 94	V0		
Protection class	IP 67, in screwed condition		
Housing material	TPU black		
Contact material	CuSn, gold plated nickel		
Thread material	Zinc die-casting, nickel-plated		
Gasket	-		
Cable construction	2 x AWG 22/19 + 2 x AWG 24/19 + Drainwire AWG 22/19		
Cable jacket	PUR, RAL 4001 violet		
Conductor insulation	Shield, blue, white, red, black		
Cable diameter	6.7 mm		
Bending radius	15 x cable diameter		
Storage temperature range	-40 °C – 90 °C		
Temperature range connector	-25°C – 90°C		
Temperature range cable fixed	-40 °C – 80 °C		
Temperature range cable moving	-20 °C – 75 °C		
Mechanical service life	-		
Weight (kg/piece)	0.135	0.305	0.605
Approvals	the cable is UL, CSA certified 80° 300V		


Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Actuator sensor interface - DeviceNet field bus cables

Female M12 straight with PUR cable, shielded 360°, open end
self-locking screwed connection
c-track compatible, halogen free




Dimensions



PIN assignment



Circuit diagram



Description	Part-No.	Type	PU	
Cable length (m)	2.0	496802	KUG5-M12/DN 2M-PUR	10
	5.0	496805	KUG5-M12/DN 5M-PUR	10
	10.0	496810	KUG5-M12/DN 10M-PUR	10

Technical data

Nominal voltage	AC/DC 24 V		
Nominal voltage range	max. 30 V		
Rated current	4 A		
Number of terminations	5		
Cable length (m)	2.0	5.0	10.0
Status Indication	-		
Current Consumption per LED	-		
Coding	A		
Shielding	360°		

General

Form	M12 x 1, female straight		
Rated insulation voltage (EN 50178)	60 V		
Test voltage	1.5 kV		
Pollution degree	3		
Insulation resistance	>10 ⁹ Ω		
Contact resistance	< 5 mΩ		
Class of flammability according to UL 94	V0		
Protection class	IP 67, in screwed condition		
Housing material	TPU black		
Contact material	CuSn, gold plated nickel		
Thread material	Zinc die-casting, nickel-plated		
Gasket	NBR		
Cable construction	2 x AWG 22/19 + 2 x AWG 24/19 + Drainwire AWG 22/19		
Cable jacket	PUR, RAL 4001 violet		
Conductor insulation	Shield, blue, white, red, black		
Cable diameter	6.7 mm		
Bending radius	15 x cable diameter		
Storage temperature range	-40 °C – 90 °C		
Temperature range connector	-25 °C – 90 °C		
Temperature range cable fixed	-40 °C – 80 °C		
Temperature range cable moving	-20 °C – 75 °C		
Mechanical service life	-		
Weight (kg/piece)	0.135	0.305	0.605
Approvals	the cable is UL, CSA certified 80° 300V		


Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Actuator sensor interface - DeviceNet field bus cables


Male-female M12 straight with PUR cable, shielded 360°
self-locking screwed connection
c-track compatible, halogen free




Dimensions



PIN assignment



Circuit diagram



Description	Part-No.	Type	PU	
Cable length (m)	0.3	496903	STG5-M12/KUG5-M12/DN 0,3M-PUR	10
	0.5	496905	STG5-M12/KUG5-M12/DN 0,5M-PUR	10
	0.6	496906	STG5-M12/KUG5-M12/DN 0,6M-PUR	10
	0.7	496907	STG5-M12/KUG5-M12/DN 0,7M-PUR	10
	0.8	496908	STG5-M12/KUG5-M12/DN 0,8M-PUR	10
	1.0	496910	STG5-M12/KUG5-M12/DN 1,0M-PUR	10
	1.5	496915	STG5-M12/KUG5-M12/DN 1,5M-PUR	10
	2.0	496920	STG5-M12/KUG5-M12/DN 2,0M-PUR	10
	3.0	496930	STG5-M12/KUG5-M12/DN 3,5M-PUR	10
	5.0	496950	STG5-M12/KUG5-M12/DN 5,0M-PUR	10

Technical data

Nominal voltage	AC/DC 24 V									
Nominal voltage range	max. 30 V									
Rated current	4 A									
Number of terminations	5									
Cable length (m)	0.3	0.5	0.6	0.7	0.8	1.0	1.5	2.0	3.0	5.0
Status Indication	-									
Current Consumption per LED	-									
Coding	A									
Shielding	360°									

General


Form	M12 x 1, male - female straight									
Rated insulation voltage (EN 50178)	60 V									
Test voltage	1.5 kV									
Pollution degree	3									
Insulation resistance	>10 ⁹ Ω									
Contact resistance	< 5 mΩ									
Class of flammability according to UL 94	V0									
Protection class	IP 67, in screwed condition									
Housing material	TPU black									
Contact material	CuSn, gold plated nickel									
Thread material	Zinc die-casting, nickel-plated									
Gasket	NBR (female)									
Cable construction	2 x AWG 22/19 + 2 x AWG 24/19 + Drainwire AWG 22/19									
Cable jacket	PUR, RAL 4001 violet									
Conductor insulation	Shield, blue, white, red, black									
Cable diameter	6.7 mm									
Bending radius	15 x cable diameter									
Storage temperature range	-40 °C – 90 °C									
Temperature range connector	-25 °C – 90 °C									
Temperature range cable fixed	-40 °C – 80 °C									
Temperature range cable moving	-20 °C – 75 °C									
Mechanical service life	-									
Weight (kg/piece)	0.055	0.070	0.075	0.080	0.085	0.100	0.125	0.150	0.230	0.315
Approvals	the cable is UL, CSA certified 80° 300V									
Accessories	Article number	Type								PU
Cable markers 4x23mm	499988	LB M8/M12								5
Torque setting tool M12	490091	DM-SET M12								1

Actuator sensor interface - CORD SET ETHERNET


Male M12 straight with PUR cable, shielded 360°, open end self-locking screwed connection
Halogen free




Dimensions



PIN assignment



Circuit diagram



Description	Part-No.	Type	PU	
Cable length (m)	2.0	475002	STG4-M12/ET 2M-PUR	10
	5.0	475005	STG4-M12/ET 5M-PUR	10
	10.0	475010	STG4-M12/ET 10M-PUR	10

Technical data

Nominal voltage	AC/DC 24 V		
Nominal voltage range	max. 30 V		
Rated current	4 A		
Number of terminations	4		
Cable length (m)	2.0	5.0	10.0
Status Indication	-		
Current Consumption per LED	-		
Coding	D		
Shielding	360°		

General

Form	M12 x 1, male straight		
Rated insulation voltage (EN 50178)	250 V		
Test voltage	1.5 kV		
Pollution degree	3		
Insulation resistance	>10 ⁹ Ω		
Contact resistance	< 5 mΩ		
Class of flammability according to UL 94	V0		
Protection class	IP 65, in screwed condition		
Housing material	TPU black		
Contact material	CuSn, gold plated nickel		
Thread material	Zinc die-casting, nickel-plated		
Gasket	-		
Cable construction	2 x 2 x AWG 26/7		
Cable jacket	PUR, RAL 5021 blue		
Conductor insulation	white/green, white/orange		
Cable diameter	6.7 mm		
Bending radius	15 x cable diameter		
Storage temperature range	-40 °C – 90 °C		
Temperature range connector	-25 °C – 90 °C		
Temperature range cable fixed	-20 °C – 70 °C		
Temperature range cable moving	0 °C – 50 °C		
Mechanical service life	-		
Weight (kg/piece)	0.140	0.330	0.640
Approvals	the cable is UL, CSA certified 80° 300V		


Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Actuator sensor interface - CORD SET ETHERNET


Male M12 straight on male M12 straight with PUR cable, shielded 360°
self-locking screwed connection
Halogen free




Dimensions



PIN assignment



Circuit diagram



Description	Part-No.	Type	PU	
Cable length (m)	0.3	475203	STG4-M12/STG4-M12/ET 0,3M PUR	10
	0.6	475206	STG4-M12/STG4-M12/ET 0,6M PUR	10
	1.0	475210	STG4-M12/STG4-M12/ET 1,0M PUR	10
	1.5	475215	STG4-M12/STG4-M12/ET 1,5M PUR	10
	2.0	475220	STG4-M12/STG4-M12/ET 2,0M PUR	10
	5.0	475250	STG4-M12/STG4-M12/ET 5,0M PUR	10

Technical data


Nominal voltage	AC/DC 24 V					
Nominal voltage range	max. 30 V					
Rated current	4 A					
Number of terminations	4					
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0
Status Indication	-					
Current Consumption per LED	-					
Coding	D					
Shielding	360°					

General


Form	M12 x 1, male straight / M12 x 1, male straight					
Rated insulation voltage (EN 50178)	250 V					
Test voltage	1.5 kV					
Pollution degree	3					
Insulation resistance	>10 ⁹ Ω					
Contact resistance	< 5 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 67, in screwed condition					
Housing material	TPU black					
Contact material	CuSn, gold plated nickel					
Thread material	Tin die casting, nickel-plated					
Gasket	-					
Cable construction	2 x 2 x AWG 26/7					
Cable jacket	PUR, RAL 5021 blue					
Conductor insulation	white/green, white/orange					
Cable diameter	6.7 mm					
Bending radius	15 x cable diameter					
Storage temperature range	-30 °C – 90 °C					
Temperature range connector	-25 °C – 90 °C					
Temperature range cable fixed	-20 °C – 70 °C					
Temperature range cable moving	0 °C – 50 °C					
Mechanical service life	-					
Weight (kg/piece)	0.060	0.070	0.090	0.110	0.150	0.325
Approvals	the cable is UL, CSA certified 80° 300V					
Accessories	Article number	Type				PU
Cable markers 4x23mm	499988	LB M8/M12				5
Torque setting tool M12	490091	DM-SET M12				1

Actuator sensor interface - CORD SET PROFIBUS


Male M12 straight with PUR cable, shielded 360°, end open
self-locking screwed connection
c-track compatible, halogen free




Dimensions



PIN assignment



Circuit diagram



Description	Part-No.	Type	PU	
Cable length (m)	2.0	475302	STG2-M12/PB 2M-PUR	10
	5.0	475305	STG2-M12/PB 5M-PUR	10
	10.0	475310	STG2-M12/PB 10M-PUR	10

Technical data

Nominal voltage	AC/DC 24 V		
Nominal voltage range	max. 30 V		
Rated current	4 A		
Number of terminations	2		
Cable length (m)	2.0	5.0	10.0
Status Indication	-		
Current Consumption per LED	-		
Coding	B - invers		
Shielding	360°		

General

Form	M12 x 1, male straight		
Rated insulation voltage (EN 50178)	60 V		
Test voltage	1.5 kV		
Pollution degree	3		
Insulation resistance	>10 ⁹ Ω		
Contact resistance	< 5 mΩ		
Class of flammability according to UL 94	V0		
Protection class	IP 65, in screwed condition		
Housing material	TPU black		
Contact material	CuSn, gold plated nickel		
Thread material	Zinc die-casting, nickel-plated		
Gasket	-		
Cable construction	1 x 2 x 0.64 mm / AWG 24/19		
Cable jacket	PUR, RAL 4001 violet		
Conductor insulation	Shield, red, green		
Cable diameter	7.8 mm		
Bending radius	cable diameter		
Storage temperature range	-40 °C – 90 °C		
Temperature range connector	-25 °C – 90 °C		
Temperature range cable fixed	-40 °C – 80 °C		
Temperature range cable moving	-20 °C – 80 °C		
Mechanical service life	-		
Weight (kg/piece)	0.160	0.350	0.675
Approvals	the cable is UL, CSA certified 80° 300V		


Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Actuator sensor interface - CORD SET PROFIBUS


**Female M12 straight with PUR cable, shielded 360°, end open
self-locking screwed connection
c-track compatible, halogen free**




Dimensions



PIN assignment



Circuit diagram



Description	Part-No.	Type	PU
Cable length (m)	2.0	KUG2-M12/PB 2M-PUR	10
	5.0	KUG2-M12/PB 5M-PUR	10
	10.0	KUG2-M12/PB 10M-PUR	10

Technical data

Nominal voltage	AC/DC 24 V		
Nominal voltage range	max. 30 V		
Rated current	4 A		
Number of terminations	2		
Cable length (m)	2.0	5.0	10.0
Status Indication	-		
Current Consumption per LED	-		
Coding	B - invers		
Shielding	360°		

General

Form	M12 x 1, female straight		
Rated insulation voltage (EN 50178)	60 V		
Test voltage	1.5 kV		
Pollution degree	3		
Insulation resistance	>10 ⁹ Ω		
Contact resistance	< 5 mΩ		
Class of flammability according to UL 94	V0		
Protection class	IP 65, in screwed condition		
Housing material	TPU black		
Contact material	CuSn, gold plated nickel		
Thread material	Zinc die-casting, nickel-plated		
Gasket	-		
Cable construction	1 x 2 x 0.64 mm / AWG 24/19		
Cable jacket	PUR, RAL 4001 violet		
Conductor insulation	Shield, red, green		
Cable diameter	7.8 mm		
Bending radius	10 x cable diameter		
Storage temperature range	-40 °C – 90 °C		
Temperature range connector	-25 °C – 90 °C		
Temperature range cable fixed	-40 °C – 80 °C		
Temperature range cable moving	-20 °C – 80 °C		
Mechanical service life	-		
Weight (kg/piece)	0.160	0.350	0.675
Approvals	the cable is UL, CSA certified 80° 300V		


Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Actuator sensor interface - CORD SET PROFIBUS



Male-female M12 straight with PUR cable, shielded 360°
self-locking screwed connection
c-track compatible, halogen free




Dimensions



PIN assignment



Circuit diagram



Description	Part-No.	Type	PU	
Cable length (m)	0.3	475503	STG2-M12/KUG2-M12/PB 0,3M-PUR	10
	0.6	475506	STG2-M12/KUG2-M12/PB 0,6M-PUR	10
	1.0	475510	STG2-M12/KUG2-M12/PB 1,0M-PUR	10
	1.5	475515	STG2-M12/KUG2-M12/PB 1,5M-PUR	10
	2.0	475520	STG2-M12/KUG2-M12/PB 2,0M-PUR	10
	5.0	475550	STG2-M12/KUG2-M12/PB 5,0M-PUR	10

Technical data

Nominal voltage	AC/DC 24 V					
Nominal voltage range	max. 30 V					
Rated current	4 A					
Number of terminations	2					
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0
Status Indication	-					
Current Consumption per LED	-					
Coding	B - invers					
Shielding	360°					

General

Form	M12 x 1, male - female straight					
Rated insulation voltage (EN 50178)	60 V					
Test voltage	1.5 kV					
Pollution degree	3					
Insulation resistance	>10 ⁹ Ω					
Contact resistance	< 5 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 65, in screwed condition					
Housing material	TPU black					
Contact material	CuSn, gold plated nickel					
Thread material	Zinc die-casting, nickel-plated					
Gasket	NBR (female)					
Cable construction	1 x 2 x 0.64 mm / AWG 24/19					
Cable jacket	PUR, RAL 4001 violet					
Conductor insulation	Shield, red, green					
Cable diameter	7.8 mm					
Bending radius	10 x cable diameter					
Storage temperature range	-40 °C – 90 °C					
Temperature range connector	-25 °C – 90 °C					
Temperature range cable fixed	-40 °C – 80 °C					
Temperature range cable moving	-20 °C – 80 °C					
Mechanical service life	-					
Weight (kg/piece)	0.060	0.080	0.105	0.140	0.017	0.365

Approvals


Approvals	the cable is UL, CSA certified 80° 300V		
Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Actuator sensor interface - M8 – cables

Male M8 straight with PUR cable, open end
self-locking screwed connection
c-track compatible, halogen free



Dimensions



PIN assignment

486020, 486050, 486100




447020, 447050, 447100




Circuit diagram

486020, 486050, 486100



447020, 447050, 447100



Description	Part-No.	Type	PU	
3-pole				
Cable length (m)	2.0	486020	STG3-M8 2M-PUR	10
	5.0	486050	STG3-M8 5M-PUR	10
	10.0	486100	STG3-M8 10M-PUR	10
4-pole				
Cable length (m)	2.0	447020	STG4-M8 2M-PUR	10
	5.0	447050	STG4-M8 5M-PUR	10
	10.0	447100	STG4-M8 10M-PUR	10


Technical data	3-pole			4-pole		
Nominal voltage	AC/DC 24 V					
Nominal voltage range	max. 30 V					
Rated current	4 A					
Number of terminations	3			4		
Cable length (m)	2.0	5.0	10.0	2.0	5.0	10.0
Status Indication	-					
Current Consumption per LED	-					
Coding	-					
Shielding	-					
General						
Form	M8 x 1, male straight					
Rated insulation voltage (EN 50178)	100 V					
Test voltage	1.5 kV					
Pollution degree	3					
Insulation resistance	>10 ⁹ Ω					
Contact resistance	< 5 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition					
Housing material	TPU black					
Contact material	CuSn, gold plated nickel					
Thread material	Zinc die-casting, nickel-plated					
Gasket	-					
Cable construction	3 x 0.25mm ² (32 x 0.1)			4 x 0.25mm ² (32 x 0.1)		
Cable jacket	PUR black					
Conductor insulation	PP					
Cable diameter	4.4 mm					
Bending radius	10 x cable diameter					
Storage temperature range	-30 °C – 90 °C					
Temperature range connector	-25 °C – 90 °C					
Temperature range cable fixed	-40 °C – 80 °C					
Temperature range cable moving	-25 °C – 80 °C					
Mechanical service life	-					
Weight (kg/piece)	0.05	0.14	0.27	0.07	0.16	0.32
Approvals	cULus					
Accessories						
	Article number		Type		PU	
Cable markers 4x23mm	499988		LB M8/M12		5	
Torque setting tool M8	490090		DM-SET M8		1	

Actuator sensor interface - M8 – cables

Male M8 straight with PUR cable, shielded 360°, open end self-locking screwed connection c-track compatible, halogen free



Dimensions



PIN assignment

458102, 458105, 458110




458202, 458205, 458210




Circuit diagram

458102, 458105, 458110



458202, 458205, 458210




Description	Part-No.	Type	PU	
3-pole				
Cable length (m)	2.0	458102	STG3-M8 (C) 2M-PUR	10
	5.0	458105	STG3-M8 (C) 5M-PUR	10
	10.0	458110	STG3-M8 (C) 10M-PUR	10
4-pole				
Cable length (m)	2.0	458202	STG4-M8 (C) 2M-PUR	10
	5.0	458205	STG4-M8 (C) 5M-PUR	10
	10.0	458210	STG4-M8 (C) 10M-PUR	10

Technical data	3-pole			4-pole		
Nominal voltage				AC/DC 24 V		
Nominal voltage range				max. 30 V		
Rated current				4 A		
Number of terminations	3			4		
Cable length (m)	2.0	5.0	10.0	2.0	5.0	10.0
Status Indication	-					
Current Consumption per LED	-					
Coding	-					
Shielding	360°					

General						
Form	M8 x 1, male straight					
Rated insulation voltage (EN 50178)	100 V					
Test voltage	1.5 kV					
Pollution degree	3					
Insulation resistance	>10 ⁹ Ω					
Contact resistance	< 5 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 67 / IP 69K, in screwed condition					
Housing material	TPU black					
Contact material	CuSn, gold plated nickel					
Thread material	Zinc die-casting, nickel-plated					
Gasket	-					
Cable construction	3 x 0.25mm ² (32 x 0.1)			4 x 0.25mm ² (32 x 0.1)		
Cable jacket	PUR black					
Conductor insulation	PP					
Cable diameter	5.0 mm					
Bending radius	10 x cable diameter					
Storage temperature range	-30 °C – 90 °C					
Temperature range connector	-25 °C – 90 °C					
Temperature range cable fixed	-40 °C – 80 °C					
Temperature range cable moving	-25 °C – 80 °C					
Mechanical service life	-					
Weight (kg/piece)	0.08	0.19	0.38	0.09	0.21	0.42

Approvals			
cULus			
Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M8	490090	DM-SET M8	1

Action chart

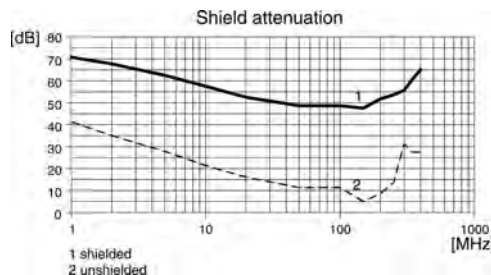


Actuator sensor interface - M8 – cables

Female M8 straight with PUR cable, open end self-locking screwed connection c-track compatible, halogen free



Dimensions



PIN assignment

481020, 481050, 481100




415020, 415050, 415100




Circuit diagram

481020, 481050, 481100



415020, 415050, 415100




Description	Part-No.		Type		PU
3-pole					
Cable length (m)	2.0	481020	KUG3-M8 2M-PUR		10
	5.0	481050	KUG3-M8 5M-PUR		10
	10.0	481100	KUG3-M8 10M-PUR		10
4-pole					
Cable length (m)	2.0	415020	KUG4-M8 2M-PUR		10
	5.0	415050	KUG4-M8 5M-PUR		10
	10.0	415100	KUG4-M8 10M-PUR		10
Technical data					
	3-pole		4-pole		
Nominal voltage			AC/DC 24 V		
Nominal voltage range			max. 30 V		
Rated current			4 A		
Number of terminations	3		4		
Cable length (m)	2.0	5.0	10.0	2.0	5.0
Status Indication	-				
Current Consumption per LED	-				
Coding	-				
Shielding	-				
General					
Form	M8 x 1, female straight				
Rated insulation voltage (EN 50178)	100 V				
Test voltage	1.5 kV				
Pollution degree	3				
Insulation resistance	>10 ⁹ Ω				
Contact resistance	< 5 mΩ				
Class of flammability according to UL 94	V0				
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition				
Housing material	TPU black				
Contact material	CuSn, gold plated nickel				
Thread material	Zinc die-casting, nickel-plated				
Gasket	NBR				
Cable construction	3 x 0.25mm ² (32 x 0.1)		4 x 0.25mm ² (32 x 0.1)		
Cable jacket	PUR black				
Conductor insulation	PP				
Cable diameter	4.4 mm				
Bending radius	10 x cable diameter				
Storage temperature range	-30 °C – 90 °C				
Temperature range connector	-25 °C – 90 °C				
Temperature range cable fixed	-40 °C – 80 °C				
Temperature range cable moving	-25 °C – 80 °C				
Mechanical service life	-				
Weight (kg/piece)	0.05	0.14	0.27	0.07	0.16
Approvals	cULus				
Accessories					
	Article number		Type		PU
Cable markers 4x23mm	499988		LB M8/M12		5
Torque setting tool M8	490090		DM-SET M8		1

Actuator sensor interface - M8 – cables

Female M8 straight with PUR cable, shielded 360°, open end self-locking screwed connection
c-track compatible, halogen free



Dimensions



PIN assignment

458302, 458305, 458310




458402, 458405, 458410




Circuit diagram

458302, 458305, 458310



458402, 458405, 458410




Description	Part-No.	Type	PU	
3-pole				
Cable length (m)	2.0	458302	KUG3-M8 (C) 2M-PUR	10
	5.0	458305	KUG3-M8 (C) 5M-PUR	10
	10.0	458310	KUG3-M8 (C) 10M-PUR	10
4-pole				
Cable length (m)	2.0	458402	KUG4-M8 (C) 2M-PUR	10
	5.0	458405	KUG4-M8 (C) 5M-PUR	10
	10.0	458410	KUG4-M8 (C) 10M-PUR	10

Technical data	3-pole			4-pole		
Nominal voltage				AC/DC 24 V		
Nominal voltage range				max. 30 V		
Rated current				4 A		
Number of terminations	3			4		
Cable length (m)	2.0	5.0	10.0	2.0	5.0	10.0
Status Indication				-		
Current Consumption per LED				-		
Coding				-		
Shielding				360°		

General						
Form	M8 x 1, female straight					
Rated insulation voltage (EN 50178)	100 V					
Test voltage	1.5 kV					
Pollution degree	3					
Insulation resistance	>10 ⁹ Ω					
Contact resistance	< 5 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 67 / IP 69K, in screwed condition					
Housing material	TPU black					
Contact material	CuSn, gold plated nickel					
Thread material	Zinc die-casting, nickel-plated					
Gasket	NBR					
Cable construction	3 x 0.25mm ² (32 x 0.1)			4 x 0.25mm ² (32 x 0.1)		
Cable jacket	PUR black					
Conductor insulation	PP					
Cable diameter	5.0 mm					
Bending radius	10 x cable diameter					
Storage temperature range	-30 °C – 90 °C					
Temperature range connector	-25 °C – 90 °C					
Temperature range cable fixed	-40 °C – 80 °C					
Temperature range cable moving	-25 °C – 80 °C					
Mechanical service life	-					
Weight (kg/piece)	0.08	0.19	0.38	0.09	0.21	0.42

Approvals			
cULus			
Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M8	490090	DM-SET M8	5

Action chart

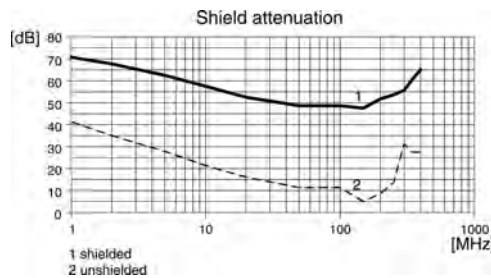


Actuator sensor interface - M8 – cables

Female M8 angled with PUR cable, open end
self-locking screwed connection
c-track compatible, halogen free



Dimensions



PIN assignment

474020, 474050, 474100




416020, 416050, 416100




Circuit diagram

474020, 474050, 474100



416020, 416050, 416100



Description	Part-No.	Type	PU	
3-pole				
Cable length (m)	2.0	474020	KUW3-M8 2M-PUR	10
	5.0	474050	KUW3-M8 5M-PUR	10
	10.0	474100	KUW3-M8 10M-PUR	10
4-pole				
Cable length (m)	2.0	416020	KUW4-M8 2M-PUR	10
	5.0	416050	KUW4-M8 5M-PUR	10
	10.0	416100	KUW4-M8 10M-PUR	10

Technical data	3-pole			4-pole		
Nominal voltage	AC/DC 24 V					
Nominal voltage range	max. 30 V					
Rated current	4 A					
Number of terminations	3			4		
Cable length (m)	2.0	5.0	10.0	2.0	5.0	10.0
Status Indication	-					
Current Consumption per LED	-					
Coding	-					
Shielding	-					
General						
Form	M8 x 1, female angled					
Rated insulation voltage (EN 50178)	100 V					
Test voltage	1.5 kV					
Pollution degree	3					
Insulation resistance	>10 ⁹ Ω					
Contact resistance	< 5 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition					
Housing material	TPU black					
Contact material	CuSn, gold plated nickel					
Thread material	Zinc die-casting, nickel-plated					
Gasket	NBR					
Cable construction	3 x 0.25mm ² (32 x 0.1)			4 x 0.25mm ² (32 x 0.1)		
Cable jacket	PUR black					
Conductor insulation	PP					
Cable diameter	4.4 mm					
Bending radius	10 x cable diameter					
Storage temperature range	-30 °C – 90 °C					
Temperature range connector	-25 °C – 90 °C					
Temperature range cable fixed	-40 °C – 80 °C					
Temperature range cable moving	-25 °C – 80 °C					
Mechanical service life	-					
Weight (kg/piece)	0.05	0.14	0.26	0.06	0.16	0.31
Approvals	cULus					

Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M8	490090	DM-SET M8	1

Actuator sensor interface - M8 – cables

Female M8 angled with PUR cable, shielded 360°, open end self-locking screwed connection c-track compatible, halogen free




Description	Part-No.	Type	PU	
3-pole				
Cable length (m)	2.0	458502	KUW3-M8 (C) 2M-PUR	10
	5.0	458505	KUW3-M8 (C) 5M-PUR	10
	10.0	458510	KUW3-M8 (C) 10M-PUR	10
4-pole				
Cable length (m)	2.0	458602	KUW4-M8 (C) 2M-PUR	10
	5.0	458605	KUW4-M8 (C) 5M-PUR	10
	10.0	458610	KUW4-M8 (C) 10M-PUR	10

Technical data	3-pole			4-pole		
Nominal voltage				AC/DC 24 V		
Nominal voltage range				max. 30 V		
Rated current				4 A		
Number of terminations	3			4		
Cable length (m)	2.0	5.0	10.0	2.0	5.0	10.0
Status Indication				-		
Current Consumption per LED				-		
Coding				-		
Shielding				360°		

General	
Form	M8 x 1, female angled
Rated insulation voltage (EN 50178)	100 V
Test voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁹ Ω
Contact resistance	< 5 mΩ
Class of flammability according to UL 94	V0
Protection class	IP 67 / IP 69K, in screwed condition
Housing material	TPU black
Contact material	CuSn, gold plated nickel
Thread material	Zinc die-casting, nickel-plated
Gasket	NBR
Cable construction	3 x 0.25mm ² (32 x 0.1) 4 x 0.25mm ² (32 x 0.1)
Cable jacket	PUR black
Conductor insulation	PP
Cable diameter	5.0 mm
Bending radius	10 x cable diameter
Storage temperature range	-30 °C – 90 °C
Temperature range connector	-25 °C – 90 °C
Temperature range cable fixed	-40 °C – 80 °C
Temperature range cable moving	-25 °C – 80 °C
Mechanical service life	-
Weight (kg/piece)	0.08 0.20 0.39 0.09 0.21 0.40
Approvals	cULus

Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M8	490090	DM-SET M8	1

Dimensions



PIN assignment

458502, 458505, 458510




458602, 458605, 458610




Circuit diagram


458502, 458505, 458510



458602, 458605, 458610



Action chart

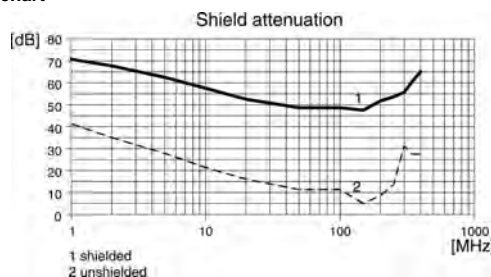


Actuator sensor interface - M8 – cables

**Female M8 angled with 2 LED's and PUR cable, open end
self-locking screwed connection
c-track compatible, halogen free**




Dimensions



PIN assignment



Circuit diagram



Description	Part-No.	Type	PU
3-pole			
Cable length (m)	2.0	KUW/LED A-M8 2M-PUR	10
	5.0	KUW/LED A-M8 5M-PUR	10
	10.0	KUW/LED A-M8 10M-PUR	10

Technical data		3-pole	
Nominal voltage		DC 24 V	
Nominal voltage range		DC 10 - 28 V	
Rated current		4 A	
Number of terminations		3	
Cable length (m)	2.0	5.0	10.0
Status Indication	Operating voltage: LED green; I/O:LED yellow		
Current Consumption per LED	< 10 mA / LED		
Coding	-		
Shielding	-		


General				
Form	M8 x 1, female angled, with 2 LEDs			
Rated insulation voltage (EN 50178)	32 V			
Test voltage	-			
Pollution degree	3			
Insulation resistance	>10 ⁹ Ω			
Contact resistance	< 5 mΩ			
Class of flammability according to UL 94	V0			
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition			
Housing material	TPU transparent			
Contact material	CuSn, gold plated nickel			
Thread material	Zinc die-casting, nickel-plated			
Gasket	NBR			
Cable construction	3 x 0.25mm ² (32 x 0.1)			
Cable jacket	PUR black			
Conductor insulation	PP			
Cable diameter	4.4 mm			
Bending radius	10 x cable diameter			
Storage temperature range	-30 °C – 90 °C			
Temperature range connector	-25 °C – 90 °C			
Temperature range cable fixed	-40 °C – 80 °C			
Temperature range cable moving	-25 °C – 80 °C			
Mechanical service life	-			
Weight (kg/piece)	0.05	0.14	0.27	
Approvals	cULus			
Accessories		Article number	Type	PU
Cable markers 4x23mm		499988	LB M8/M12	5
Torque setting tool M8		490090	DM-SET M8	1

Actuator sensor interface - M12 - cables

Male M12 straight with PUR cable, open end self-locking screwed connection c-track compatible, halogen free



Dimensions



PIN assignment

471020, 471050, 471100




472020, 472050, 472100




Circuit diagram

471020, 471050, 471100



472020, 472050, 472100



Description	Part-No.	Type	PU	
3-pole				
Cable length (m)	2.0	471020	STG3-M12 2M-PUR	10
	5.0	471050	STG3-M12 5M-PUR	10
	10.0	471100	STG3-M12 10M-PUR	10
4-pole				
Cable length (m)	2.0	472020	STG4-M12 2M-PUR	10
	5.0	472050	STG4-M12 5M-PUR	10
	10.0	472100	STG4-M12 10M-PUR	10


Technical data	3-pole			4-pole		
Nominal voltage	AC/DC 24 V					
Nominal voltage range	max. 250 V					
Rated current	4 A					
Number of terminations	3			4		
Cable length (m)	2.0	5.0	10.0	2.0	5.0	10.0
Status Indication	-					
Current Consumption per LED	-					
Coding	A					
Shielding	-					
General						
Form	M12 x 1, male straight					
Rated insulation voltage (EN 50178)	250 V					
Test voltage	2.5 kV					
Pollution degree	3					
Insulation resistance	>10 ⁹ Ω					
Contact resistance	<5 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition					
Housing material	TPU black					
Contact material	CuSn, gold plated nickel					
Thread material	Zinc die-casting, nickel-plated					
Gasket	-					
Cable construction	3 x 0.34 mm ² (42 x 0.1)			4 x 0.34 mm ² (42 x 0.1)		
Cable jacket	PUR black					
Conductor insulation	PP					
Cable diameter	4.4 mm			4.7 mm		
Bending radius	10 x cable diameter					
Storage temperature range	-30 °C – 90 °C					
Temperature range connector	-25 °C – 90 °C					
Temperature range cable fixed	-40 °C – 80 °C					
Temperature range cable moving	-25 °C – 80 °C					
Mechanical service life	-					
Weight (kg/piece)	0.090	0.190	0.380	0.100	0.200	0.400
Approvals	cULus					
Accessories						
	Article number		Type		PU	
Cable markers 4x23mm	499988		LB M8/M12		5	
Torque setting tool M12	490091		DM-SET M12		1	

Actuator sensor interface - M12 - cables

Male M12 straight with PUR cable, open end self-locking screwed connection c-track compatible, halogen free



Dimensions




PIN assignment

473020, 473050, 473100




482020, 482050, 482100




Circuit diagram

473020, 473050, 473100



482020, 482050, 482100



Description	Part-No.	Type	PU	
5-pole				
Cable length (m)	2.0	473020	STG5-M12 2M-PUR	10
	5.0	473050	STG5-M12 5M-PUR	10
	10.0	473100	STG5-M12 10M-PUR	10
8-pole				
Cable length (m)	2.0	482020	STG8-M12 2M-PUR	10
	5.0	482050	STG8-M12 5M-PUR	10
	10.0	482100	STG8-M12 10M-PUR	10

Technical data	5-pole			8-pole		
	Nominal voltage	AC/DC 24 V				
Nominal voltage range	max. 60 V			max. 30 V		
Rated current	4 A			2 A		
Number of terminations	5			8		
Cable length (m)	2.0	5.0	10.0	2.0	5.0	10.0
Status Indication	-					
Current Consumption per LED	-					
Coding	A					
Shielding	-					
General						
Form	M12 x 1, male straight					
Rated insulation voltage (EN 50178)	63 V			36 V		
Test voltage	1.5 kV					
Pollution degree	3					
Insulation resistance	>10 ⁹ Ω					
Contact resistance	<5 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition					
Housing material	TPU black					
Contact material	CuSn, gold plated nickel					
Thread material	Zinc die-casting, nickel-plated					
Gasket	-					
Cable construction	5 x 0.34 mm ² (42 x 0.1)			8 x 0.25 mm ² (32 x 0.1)		
Cable jacket	PUR black					
Conductor insulation	PP					
Cable diameter	5.0 mm			5.9 mm		
Bending radius	10 x cable diameter					
Storage temperature range	-30 °C – 90 °C					
Temperature range connector	-25 °C – 90 °C					
Temperature range cable fixed	-40 °C – 80 °C					
Temperature range cable moving	-25 °C – 80 °C					
Mechanical service life	-					
Weight (kg/piece)	0.100	0.250	0.480	0.110	0.260	0.525
Approvals	cULus					
Accessories						
	Article number		Type		PU	
Cable markers 4x23mm	499988		LB M8/M12		5	
Torque setting tool M12	490091		DM-SET M12		1	

Actuator sensor interface - M12 - cables

Male M12 straight with PUR cable, shielded 360°, open end self-locking screwed connection c-track compatible, halogen free




Description	Part-No.	Type	PU	
3-pole				
Cable length (m)	2.0	456002	STG3-M12 (C) 2M-PUR	10
	5.0	456005	STG3-M12 (C) 5M-PUR	10
	10.0	456010	STG3-M12 (C) 10M-PUR	10
4-pole				
Cable length (m)	2.0	456102	STG4-M12 (C) 2M-PUR	10
	5.0	456105	STG4-M12 (C) 5M-PUR	10
	10.0	456110	STG4-M12 (C) 10M-PUR	10

Technical data	3-pole			4-pole		
Nominal voltage				AC/DC 24 V		
Nominal voltage range				max. 250 V		
Rated current				4 A		
Number of terminations	3			4		
Cable length (m)	2.0	5.0	10.0	2.0	5.0	10.0
Status Indication				-		
Current Consumption per LED				-		
Coding				A		
Shielding				-		


General	
Form	M12 x 1, male straight
Rated insulation voltage (EN 50178)	250 V
Test voltage	2.5 kV
Pollution degree	3
Insulation resistance	>10 ⁹ Ω
Contact resistance	<5 mΩ
Class of flammability according to UL 94	V0
Protection class	IP 67 / IP 69K, in screwed condition
Housing material	TPU black
Contact material	CuSn, gold plated nickel
Thread material	Zinc die-casting, nickel-plated
Gasket	-
Cable construction	3 x 0.34 mm ² (42 x 0.1) 4 x 0.34 mm ² (42 x 0.1)
Cable jacket	PUR black
Conductor insulation	PP
Cable diameter	5.9 mm
Bending radius	10 x cable diameter
Storage temperature range	-30 °C – 90 °C
Temperature range connector	-25 °C – 90 °C
Temperature range cable fixed	-40 °C – 80 °C
Temperature range cable moving	-25 °C – 80 °C
Mechanical service life	-
Weight (kg/piece)	0.115 0.225 0.420 0.125 0.275 0.520
Approvals	cULus

Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Action chart

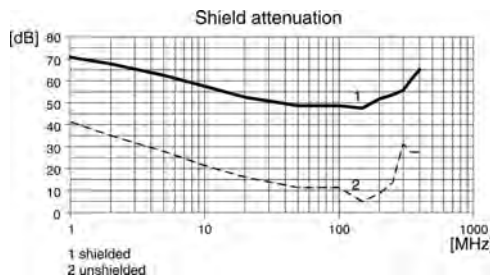

Dimensions



PIN assignment

456002, 456005, 456010




456102, 456105, 456110




Circuit diagram

456002, 456005, 456010



456102, 456105, 456110




Actuator sensor interface - M12 - cables

Male M12 straight with PUR cable, shielded 360°, open end self-locking screwed connection
c-track compatible, halogen free



Dimensions




PIN assignment

456202, 456205, 456210




458702, 458705, 458710




Circuit diagram

456202, 456205, 456210



458702, 458705, 458710




Description	Part-No.		Type	PU
5-pole				
Cable length (m)	2.0	456202	STG5-M12 (C) 2M-PUR	10
	5.0	456205	STG5-M12 (C) 5M-PUR	10
	10.0	456210	STG5-M12 (C) 10M-PUR	10
8-pole				
Cable length (m)	2.0	458702	STG8-M12 (C) 2M-PUR	10
	5.0	458705	STG8-M12 (C) 5M-PUR	10
	10.0	458710	STG8-M12 (C) 10M-PUR	10

Technical data	5-pole		8-pole			
Nominal voltage	AC/DC 24 V					
Nominal voltage range	max. 60 V		max. 30 V			
Rated current	4 A		2 A			
Number of terminations	5		8			
Cable length (m)	2.0	5.0	10.0	2.0	5.0	10.0
Status Indication	-					
Current Consumption per LED	-					
Coding	A					
Shielding	-					

General	
Form	M12 x 1, male straight
Rated insulation voltage (EN 50178)	63 V
Test voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁹ Ω
Contact resistance	<5 mΩ
Class of flammability according to UL 94	V0
Protection class	IP 67 / IP 69K, in screwed condition
Housing material	TPU black
Contact material	CuSn, gold plated nickel
Thread material	Zinc die-casting, nickel-plated
Gasket	-
Cable construction	5 x 0.34 mm ² (42 x 0.1) 8 x 0.25 mm ² (32 x 0.1)
Cable jacket	PUR black
Conductor insulation	PP
Cable diameter	5.9 mm
Bending radius	10 x cable diameter
Storage temperature range	-30 °C – 90 °C
Temperature range connector	-25 °C – 90 °C
Temperature range cable fixed	-40 °C – 80 °C
Temperature range cable moving	-25 °C – 80 °C
Mechanical service life	-
Weight (kg/piece)	0.150 0.300 0.565 0.155 0.305 0.570
Approvals	cULus

Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Action chart

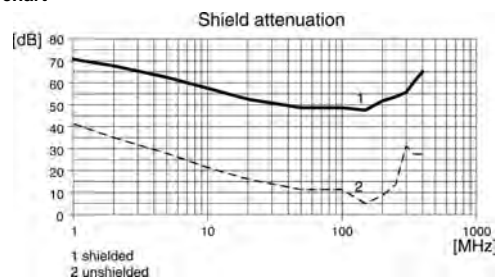


Actuator sensor interface - M12 - cables

Female M12 straight with PUR cable, open end
self-locking screwed connection
c-track compatible, halogen free



Dimensions



PIN assignment

465020, 465050, 465100




466020, 466050, 466100




Circuit diagram

465020, 465050, 465100



466020, 466050, 466100



Description	Part-No.	Type	PU	
3-pole				
Cable length (m)	2.0	465020	KUG3-M12 2M-PUR	10
	5.0	465050	KUG3-M12 5M-PUR	10
	10.0	465100	KUG3-M12 10M-PUR	10
4-pole				
Cable length (m)	2.0	466020	KUG4-M12 2M-PUR	10
	5.0	466050	KUG4-M12 5M-PUR	10
	10.0	466100	KUG4-M12 10M-PUR	10


Technical data	3-pole			4-pole		
Nominal voltage				AC/DC 24 V		
Nominal voltage range				max. 250 V		
Rated current				4 A		
Number of terminations	3			4		
Cable length (m)	2.0	5.0	10.0	2.0	5.0	10.0
Status Indication				-		
Current Consumption per LED				-		
Coding				A		
Shielding				-		
General						
Form	M12 x 1, female straight					
Rated insulation voltage (EN 50178)	250 V					
Test voltage	2.5 kV					
Pollution degree	3					
Insulation resistance	>10 ⁹ Ω					
Contact resistance	<5 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition					
Housing material	TPU black					
Contact material	CuSn, gold plated nickel					
Thread material	Zinc die-casting, nickel-plated					
Gasket	-					
Cable construction	3 x 0.34 mm ² (42 x 0.1)			4 x 0.34 mm ² (42 x 0.1)		
Cable jacket	PUR black					
Conductor insulation	PP					
Cable diameter	4.4 mm			4.7 mm		
Bending radius	10 x cable diameter					
Storage temperature range	-30 °C – 90 °C					
Temperature range connector	-25 °C – 90 °C					
Temperature range cable fixed	-40 °C – 80 °C					
Temperature range cable moving	-25 °C – 80 °C					
Mechanical service life	-					
Weight (kg/piece)	0.090	0.190	0.380	0.100	0.200	0.400
Approvals	cULus					
Accessories						
	Article number		Type		PU	
Cable markers 4x23mm	499988		LB M8/M12		5	
Torque setting tool M12	490091		DM-SET M12		1	

Actuator sensor interface - M12 - cables

Female M12 straight with PUR cable, open end self-locking screwed connection c-track compatible, halogen free




Dimensions




PIN assignment

477020, 477050, 477100




478020, 478050, 478100



Circuit diagram

477020, 477050, 477100



478020, 478050, 478100



Description	Part-No.	Type	PU	
5-pole				
Cable length (m)	2.0	477020	KUG5-M12 2M-PUR	10
	5.0	477050	KUG5-M12 5M-PUR	10
	10.0	477100	KUG5-M12 10M-PUR	10
8-pole				
Cable length (m)	2.0	478020	KUG8-M12 2M-PUR	10
	5.0	478050	KUG8-M12 5M-PUR	10
	10.0	478100	KUG8-M12 10M-PUR	10

Technical data	5-pole			8-pole		
Nominal voltage	AC/DC 24 V					
Nominal voltage range	max. 60 V			max. 30 V		
Rated current	4 A			2 A		
Number of terminations	5			8		
Cable length (m)	2.0	5.0	10.0	2.0	5.0	10.0
Status Indication	-					
Current Consumption per LED	-					
Coding	A					
Shielding	-					
General						
Form	M12 x 1, female straight					
Rated insulation voltage (EN 50178)	63 V			36 V		
Test voltage	1.5 kV					
Pollution degree	3					
Insulation resistance	>10 ⁹ Ω					
Contact resistance	<5 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition					
Housing material	TPU black					
Contact material	CuSn, gold plated nickel					
Thread material	Zinc die-casting, nickel-plated					
Gasket	-					
Cable construction	5 x 0.34 mm ² (42 x 0.1)			8 x 0.25 mm ² (32 x 0.1)		
Cable jacket	PUR black					
Conductor insulation	PP					
Cable diameter	5.0 mm			5.9 mm		
Bending radius	10 x cable diameter					
Storage temperature range	-30 °C – 90 °C					
Temperature range connector	-25 °C – 90 °C					
Temperature range cable fixed	-40 °C – 80 °C					
Temperature range cable moving	-25 °C – 80 °C					
Mechanical service life	-					
Weight (kg/piece)	0.100	0.250	0.480	0.110	0.260	0.525
Approvals	cULus					
Accessories						
	Article number		Type		PU	
Cable markers 4x23mm	499988		LB M8/M12		5	
Torque setting tool M12	490091		DM-SET M12		1	

Actuator sensor interface - M12 - cables


Female M12 straight with PUR cable, shielded 360°, open end self-locking screwed connection c-track compatible, halogen free



Description	Part-No.	Type	PU	
3-pole				
Cable length (m)	2.0	456302	KUG3-M12 (C) 2M-PUR	10
	5.0	456305	KUG3-M12 (C) 5M-PUR	10
	10.0	456310	KUG3-M12 (C) 10M-PUR	10
4-pole				
Cable length (m)	2.0	456402	KUG4-M12 (C) 2M-PUR	10
	5.0	456405	KUG4-M12 (C) 5M-PUR	10
	10.0	456410	KUG4-M12 (C) 10M-PUR	10

Technical data	3-pole			4-pole		
Nominal voltage				AC/DC 24 V		
Nominal voltage range				max. 250 V		
Rated current				4 A		
Number of terminations	3			4		
Cable length (m)	2.0	5.0	10.0	2.0	5.0	10.0
Status Indication				-		
Current Consumption per LED				-		
Coding				A		
Shielding				-		

Dimensions



PIN assignment

456302, 456305, 456310




456402, 456405, 456410




Circuit diagram

456302, 456305, 456310




456402, 456405, 456410



General						
Form	M12 x 1, female straight					
Rated insulation voltage (EN 50178)	250 V					
Test voltage	2.5 kV					
Pollution degree	3					
Insulation resistance	>10 ⁹ Ω					
Contact resistance	<5 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 67 / IP 69K, in screwed condition					
Housing material	TPU black					
Contact material	CuSn, gold plated nickel					
Thread material	Zinc die-casting, nickel-plated					
Gasket	-					
Cable construction	3 x 0.34 mm ² (42 x 0.1)			4 x 0.34 mm ² (42 x 0.1)		
Cable jacket	PUR black					
Conductor insulation	PP					
Cable diameter	5.9 mm					
Bending radius	10 x cable diameter					
Storage temperature range	-30 °C – 90 °C					
Temperature range connector	-25 °C – 90 °C					
Temperature range cable fixed	-40 °C – 80 °C					
Temperature range cable moving	-25 °C – 80 °C					
Mechanical service life	-					
Weight (kg/piece)	0.115	0.225	0.420	0.125	0.275	0.520
Approvals	cULus					

Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Action chart

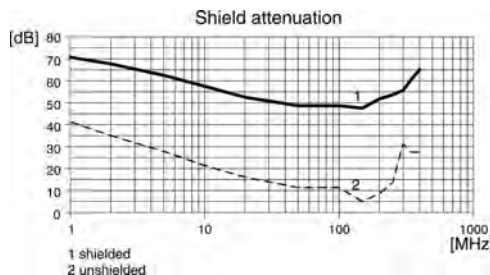


Actuator sensor interface - M12 - cables

Female M12 straight with PUR cable, shielded 360°, open end self-locking screwed connection c-track compatible, halogen free




Dimensions




PIN assignment

456502, 456505, 456510




458802, 458805, 458810




Circuit diagram

456502, 456505, 456510



458802, 458805, 458810




Description	Part-No.	Type	PU	
5-pole				
Cable length (m)	2.0	456502	KUG5-M12 (C) 2M-PUR	10
	5.0	456505	KUG5-M12 (C) 5M-PUR	10
	10.0	456510	KUG5-M12 (C) 10M-PUR	10
8-pole				
Cable length (m)	2.0	458802	KUG8-M12 (C) 2M-PUR	10
	5.0	458805	KUG8-M12 (C) 5M-PUR	10
	10.0	458810	KUG8-M12 (C) 10M-PUR	10

Technical data	5-pole			8-pole		
Nominal voltage	AC/DC 24 V					
Nominal voltage range	max. 60 V			max. 30 V		
Rated current	4 A			2 A		
Number of terminations	5			8		
Cable length (m)	2.0	5.0	10.0	2.0	5.0	10.0
Status Indication	-					
Current Consumption per LED	-					
Coding	A					
Shielding	-					
General						
Form	M12 x 1, female straight					
Rated insulation voltage (EN 50178)	63 V			36 V		
Test voltage	1.5 kV					
Pollution degree	3					
Insulation resistance	>10 ⁹ Ω					
Contact resistance	<5 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 67 / IP 69K, in screwed condition					
Housing material	TPU black					
Contact material	CuSn, gold plated nickel					
Thread material	Zinc die-casting, nickel-plated					
Gasket	-					
Cable construction	5 x 0.34 mm ² (42 x 0.1)			8 x 0.25 mm ² (32 x 0.1)		
Cable jacket	PUR black					
Conductor insulation	PP					
Cable diameter	5.9 mm					
Bending radius	10 x cable diameter					
Storage temperature range	-30 °C – 90 °C					
Temperature range connector	-25 °C – 90 °C					
Temperature range cable fixed	-40 °C – 80 °C					
Temperature range cable moving	-25 °C – 80 °C					
Mechanical service life	-					
Weight (kg/piece)	0.150	0.300	0.565	0.150	0.305	0.570

Approvals	cULus		
Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Action chart

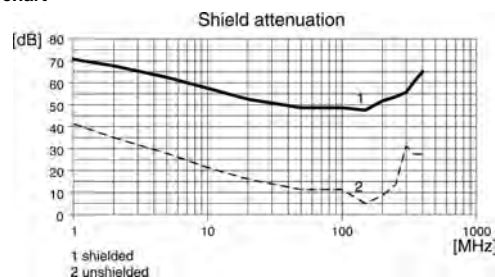

Actuator sensor interface - M12 - cables

Female M12 angled with PUR cable, open end
self-locking screwed connection
c-track compatible, halogen free




Description	Part-No.	Type	PU	
3-pole				
Cable length (m)	2.0	462020	KUW3-M12 2M-PUR	10
	5.0	462050	KUW3-M12 5M-PUR	10
	10.0	462100	KUW3-M12 10M-PUR	10
4-pole				
Cable length (m)	2.0	464020	KUW4-M12 2M-PUR	10
	5.0	464050	KUW4-M12 5M-PUR	10
	10.0	464100	KUW4-M12 10M-PUR	10

Technical data	3-pole			4-pole		
Nominal voltage				AC/DC 24 V		
Nominal voltage range				max. 250 V		
Rated current				4 A		
Number of terminations	3			4		
Cable length (m)	2.0	5.0	10.0	2.0	5.0	10.0
Status Indication				-		
Current Consumption per LED				-		
Coding				A		
Shielding				-		

General						
Form	M12 x 1, female angled					
Rated insulation voltage (EN 50178)	250 V					
Test voltage	2.5 kV					
Pollution degree	3					
Insulation resistance	>10 ⁹ Ω					
Contact resistance	<5 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition					
Housing material	TPU black					
Contact material	CuSn, gold plated nickel					
Thread material	Zinc die-casting, nickel-plated					
Gasket	NBR					
Cable construction	3 x 0.34 mm ² (42 x 0.1)			4 x 0.34 mm ² (42 x 0.1)		
Cable jacket	PUR black					
Conductor insulation	PP					
Cable diameter	4.4 mm			4.7 mm		
Bending radius	10 x cable diameter					
Storage temperature range	-30 °C – 90 °C					
Temperature range connector	-25 °C – 90 °C					
Temperature range cable fixed	-40 °C – 80 °C					
Temperature range cable moving	-25 °C – 80 °C					
Mechanical service life	-					
Weight (kg/piece)	0.090	0.190	0.380	0.100	0.200	0.400
Approvals	cULus					

Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Dimensions



PIN assignment

462020, 462050, 462100




464020, 464050, 464100



Circuit diagram

462020, 462050, 462100



464020, 464050, 464100




Actuator sensor interface - M12 - cables

Female M12 angled with PUR cable, open end self-locking screwed connection c-track compatible, halogen free




Dimensions




PIN assignment

443020, 443050, 443100




479020, 479050, 479100



Circuit diagram

443020, 443050, 443100



479020, 479050, 479100



Description	Part-No.	Type	PU	
5-pole				
Cable length (m)	2.0	443020	KUW5-M12 2M-PUR	10
	5.0	443050	KUW5-M12 5M-PUR	10
	10.0	443100	KUW5-M12 10M-PUR	10
8-pole				
Cable length (m)	2.0	479020	KUW8-M12 2M-PUR	10
	5.0	479050	KUW8-M12 5M-PUR	10
	10.0	479100	KUW8-M12 10M-PUR	10

Technical data	5-pole			8-pole		
Nominal voltage	AC/DC 24 V					
Nominal voltage range	max. 60 V			max. 30 V		
Rated current	4 A			2 A		
Number of terminations	5			8		
Cable length (m)	2.0	5.0	10.0	2.0	5.0	10.0
Status Indication	-					
Current Consumption per LED	-					
Coding	A					
Shielding	-					

General						
Form	M12 x 1, female angled					
Rated insulation voltage (EN 50178)	63 V			36 V		
Test voltage	1.5 kV					
Pollution degree	3					
Insulation resistance	>10 ⁹ Ω					
Contact resistance	<5 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition					
Housing material	TPU black					
Contact material	CuSn, gold plated nickel					
Thread material	Zinc die-casting, nickel-plated					
Gasket	NBR					
Cable construction	5 x 0.34 mm ² (42 x 0.1)			8 x 0.25 mm ² (32 x 0.1)		
Cable jacket	PUR black					
Conductor insulation	PP					
Cable diameter	5.0 mm			5.9 mm		
Bending radius	10 x cable diameter					
Storage temperature range	-30 °C – 90 °C					
Temperature range connector	-25 °C – 90 °C					
Temperature range cable fixed	-40 °C – 80 °C					
Temperature range cable moving	-25 °C – 80 °C					
Mechanical service life	-					
Weight (kg/piece)	0.100	0.250	0.480	0.110	0.260	0.525
Approvals	cULus					

Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Actuator sensor interface - M12 - cables

Female M12 angled with PUR cable, shielded 360°, open end self-locking screwed connection
c-track compatible, halogen free




Description	Part-No.	Type	PU	
3-pole				
Cable length (m)	2.0	456602	KUW3-M12 (C) 2M-PUR	10
	5.0	456605	KUW3-M12 (C) 5M-PUR	10
	10.0	456610	KUW3-M12 (C) 10M-PUR	10
4-pole				
Cable length (m)	2.0	456702	KUW4-M12 (C) 2M-PUR	10
	5.0	456705	KUW4-M12 (C) 5M-PUR	10
	10.0	456710	KUW4-M12 (C) 10M-PUR	10

Technical data	3-pole			4-pole		
Nominal voltage				AC/DC 24 V		
Nominal voltage range				max. 250 V		
Rated current				4 A		
Number of terminations	3			4		
Cable length (m)	2.0	5.0	10.0	2.0	5.0	10.0
Status Indication				-		
Current Consumption per LED				-		
Coding				A		
Shielding				360°		

General	
Form	M12 x 1, female angled
Rated insulation voltage (EN 50178)	250 V
Test voltage	2.5 kV
Pollution degree	3
Insulation resistance	>10 ⁹ Ω
Contact resistance	<5 mΩ
Class of flammability according to UL 94	V0
Protection class	IP 67 / IP 69K, in screwed condition
Housing material	TPU black
Contact material	CuSn, gold plated nickel
Thread material	Zinc die-casting, nickel-plated
Gasket	NBR
Cable construction	3 x 0.34 mm ² (42 x 0.1) 4 x 0.34 mm ² (42 x 0.1)
Cable jacket	PUR black
Conductor insulation	PP
Cable diameter	5.9 mm
Bending radius	10 x cable diameter
Storage temperature range	-30 °C – 90 °C
Temperature range connector	-25 °C – 90 °C
Temperature range cable fixed	-40 °C – 80 °C
Temperature range cable moving	-25 °C – 80 °C
Mechanical service life	-
Weight (kg/piece)	0.115 0.225 0.420 0.125 0.275 0.520
Approvals	cULus

Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Dimensions



PIN assignment

456602, 456605, 456610




456702, 456705, 456710




Circuit diagram


456602, 456605, 456610



456702, 456705, 456710



Action chart

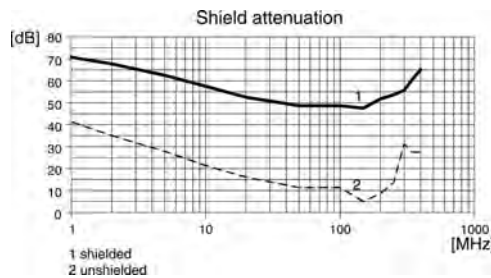


Actuator sensor interface - M12 - cables

Female M12 angled with PUR cable, shielded 360°, open end self-locking screwed connection c-track compatible, halogen free



Dimensions



PIN assignment

456802, 456805, 456810




458902, 458905, 458910




Circuit diagram

456802, 456805, 456810



458902, 458905, 458910




Description	Part-No.	Type	PU	
5-pole				
Cable length (m)	2.0	456802	KUW5-M12 (C) 2M-PUR	10
	5.0	456805	KUW5-M12 (C) 5M-PUR	10
	10.0	456810	KUW5-M12 (C) 10M-PUR	10
8-pole				
Cable length (m)	2.0	458902	KUW8-M12 (C) 2M-PUR	10
	5.0	458905	KUW8-M12 (C) 5M-PUR	10
	10.0	458910	KUW8-M12 (C) 10M-PUR	10

Technical data	5-pole			8-pole		
Nominal voltage	AC/DC 24 V					
Nominal voltage range	max. 60 V			max. 30 V		
Rated current	4 A			2 A		
Number of terminations	5			8		
Cable length (m)	2.0	5.0	10.0	2.0	5.0	10.0
Status Indication	-					
Current Consumption per LED	-					
Coding	A					
Shielding	360°					
General						
Form	M12 x 1, female angled					
Rated insulation voltage (EN 50178)	63 V			36 V		
Test voltage	1.5 kV					
Pollution degree	3					
Insulation resistance	>10 ⁹ Ω					
Contact resistance	<5 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 67 / IP 69K, in screwed condition					
Housing material	TPU black					
Contact material	CuSn, gold plated nickel					
Thread material	Zinc die-casting, nickel-plated					
Gasket	NBR					
Cable construction	5 x 0.34 mm ² (42 x 0.1)			8 x 0.25 mm ² (32 x 0.1)		
Cable jacket	PUR black					
Conductor insulation	PP					
Cable diameter	5.9 mm					
Bending radius	10 x cable diameter					
Storage temperature range	-30 °C – 90 °C					
Temperature range connector	-25 °C – 90 °C					
Temperature range cable fixed	-40 °C – 80 °C					
Temperature range cable moving	-25 °C – 80 °C					
Mechanical service life	-					
Weight (kg/piece)	0.150	0.300	0.565	0.155	0.305	0.570
Approvals	cULus					

Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Action chart

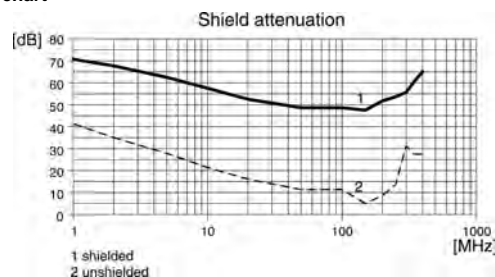

Actuator sensor interface - M12 - cables

Female M12 angled, with LEDs and PUR cable, open end self-locking screwed connection c-track compatible, halogen free




Description	Part-No.	Type	PU	
3-pole				
Cable length (m)	2.0	468020	KUW/LED A-M12 2M-PUR	10
	5.0	468050	KUW/LED A-M12 5M-PUR	10
	10.0	468100	KUW/LED A-M12 10M-PUR	10
4-pole				
Cable length (m)	2.0	469020	KUW/LED P-M12 2M-PUR	10
	5.0	469050	KUW/LED P-M12 5M-PUR	10
	10.0	469100	KUW/LED P-M12 10M-PUR	10

Technical data	3-pole	4-pole			
Nominal voltage		AC/DC 24 V			
Nominal voltage range		DC 10 - 28 V			
Rated current		4 A			
Number of terminations	3	4			
Cable length (m)	10.0	5.0	2.0	5.0	10.0
Status Indication	Operating voltage: LED green, I/O: LED yellow				
Current Consumption per LED	<10 mA / LED				
Coding	A				
Shielding	-				

General						
Form	M12 x 1, female angled, with LEDs					
Rated insulation voltage (EN 50178)	32 V					
Test voltage	-					
Pollution degree	3					
Insulation resistance	>10 ⁹ Ω					
Contact resistance	<5 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition					
Housing material	TPU transparent					
Contact material	CuSn, gold plated nickel					
Thread material	Zinc die-casting, nickel-plated					
Gasket	NBR					
Cable construction	3 x 0.34 mm ² (42 x 0.1)		4 x 0.34 mm ² (42 x 0.1)			
Cable jacket	PUR black					
Conductor insulation	PP					
Cable diameter	4.4 mm		4.7 mm			
Bending radius	10 x cable diameter					
Storage temperature range	-30 °C - 90 °C					
Temperature range connector	-25 °C - 90 °C					
Temperature range cable fixed	-40 °C - 80 °C					
Temperature range cable moving	-25 °C - 80 °C					
Mechanical service life	-					
Weight (kg/piece)	0.370	0.190	0.095	0.100	0.200	0.390
Approvals	cULus					

Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Dimensions



PIN assignment

468100, 468050, 468020




469020, 469050, 469100




Circuit diagram

468100, 468050, 468020



469020, 469050, 469100




Actuator sensor interface - M8 / M8 – cables

Male M8 straight to female M8 straight with PUR cable
self-locking screwed connection
c-track compatible, halogen free




Dimensions




PIN assignment

487003, 487006, 487010, 487015,
487020, 487050



410003, 410006, 410010, 410015,
410020, 410050



Description	Part-No.	Type	PU	
3-pole				
Cable length (m)	0.3	487003	STG3-M8/KUG3-M8 0,3M-PUR	10
	0.6	487006	STG3-M8/KUG3-M8 0,6M-PUR	10
	1.0	487010	STG3-M8/KUG3-M8 1,0M-PUR	10
	1.5	487015	STG3-M8/KUG3-M8 1,5M-PUR	10
	2.0	487020	STG3-M8/KUG3-M8 2,0M-PUR	10
	5.0	487050	STG3-M8/KUG3-M8 5,0M-PUR	10
4-pole				
Cable length (m)	0.3	410003	STG4-M8/KUG4-M8 0,3M-PUR	10
	0.6	410006	STG4-M8/KUG4-M8 0,6M-PUR	10
	1.0	410010	STG4-M8/KUG4-M8 1,0M-PUR	10
	1.5	410015	STG4-M8/KUG4-M8 1,5M-PUR	10
	2.0	410020	STG4-M8/KUG4-M8 2,0M-PUR	10
	5.0	410050	STG4-M8/KUG4-M8 5,0M-PUR	10

Technical data	3-pole					4-pole						
Nominal voltage	AC/DC 24 V											
Nominal voltage range	max. 60 V					max. 30 V						
Rated current	4 A					4 A						
Number of terminations	3					4						
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0	0.3	0.6	1.0	1.5	2.0	5.0
Status Indication	-											
Current Consumption per LED	-											
Coding	-											
Shielding	-											



General												
Form	M8 x 1, male straight / M8 x 1, female straight											
Rated insulation voltage (EN 50178)	100 V											
Test voltage	1.5 kV											
Pollution degree	3											
Insulation resistance	>10 ⁹ Ω											
Contact resistance	<5 mΩ											
Class of flammability according to UL 94	V0											
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition											
Housing material	TPU black											
Contact material	CuSn, gold plated nickel											
Thread material	Zinc die-casting, nickel-plated											
Gasket	NBR											
Cable construction	3 x 0.25 mm ² (32 x 0.1)					4 x 0.25 mm ² (32 x 0.1)						
Cable jacket	PUR black											
Conductor insulation	PP											
Cable diameter	4.4 mm											
Bending radius	10 x cable diameter											
Storage temperature range	-30 °C – 90 °C											
Temperature range connector	-25 °C – 90 °C											
Temperature range cable fixed	-40 °C – 80 °C											
Temperature range cable moving	-25 °C – 80 °C											
Mechanical service life	-											
Weight (kg/piece)	0.02	0.03	0.04	0.05	0.06	0.16	0.05	0.06	0.08	0.10	0.13	0.31
Approvals	cULus											
Accessories												
	Article number					Type					PU	
Cable markers 4x23mm	499988					LB M8/M12					5	
Torque setting tool M8	490090					DM-SET M8					1	

Actuator sensor interface - M8 / M8 – cables

Male M8 straight to female M8 angled with PUR cable
self-locking screwed connection
c-track compatible, halogen free




Dimensions




PIN assignment

488003, 488006, 488010, 488015,
488020, 488050



411003, 411006, 411010, 411015,
411020, 411050



Description	Part-No.	Type	PU	
3-pole				
Cable length (m)	0.3	488003	STG3-M8/KUW3-M8 0,3M-PUR	10
	0.6	488006	STG3-M8/KUW3-M8 0,6M-PUR	10
	1.0	488010	STG3-M8/KUW3-M8 1,0M-PUR	10
	1.5	488015	STG3-M8/KUW3-M8 1,5M-PUR	10
	2.0	488020	STG3-M8/KUW3-M8 2,0M-PUR	10
	5.0	488050	STG3-M8/KUW3-M8 5,0M-PUR	10
4-pole				
Cable length (m)	0.3	411003	STG4-M8/KUW4-M8 0,3M-PUR	10
	0.6	411006	STG4-M8/KUW4-M8 0,6M-PUR	10
	1.0	411010	STG4-M8/KUW4-M8 1,0M-PUR	10
	1.5	411015	STG4-M8/KUW4-M8 1,5M-PUR	10
	2.0	411020	STG4-M8/KUW4-M8 2,0M-PUR	10
	5.0	411050	STG4-M8/KUW4-M8 5,0M-PUR	10

Technical data	3-pole					4-pole						
Nominal voltage	AC/DC 24 V											
Nominal voltage range	max. 60 V					max. 30 V						
Rated current	4 A											
Number of terminations	3					4						
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0	0.3	0.6	1.0	1.5	2.0	5.0
Status Indication	-											
Current Consumption per LED	-											
Coding	-											
Shielding	-											


General												
Form	M8 x 1, male straight / M8 x 1, female angled											
Rated insulation voltage (EN 50178)	100 V											
Test voltage	1.5 kV											
Pollution degree	3											
Insulation resistance	>10 ⁹ Ω											
Contact resistance	<5 mΩ											
Class of flammability according to UL 94	V0											
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition											
Housing material	TPU black											
Contact material	CuSn, gold plated nickel											
Thread material	Zinc die-casting, nickel-plated											
Gasket	NBR											
Cable construction	3 x 0.25 mm ² (32 x 0.1)					4 x 0.25 mm ² (32 x 0.1)						
Cable jacket	PUR black											
Conductor insulation	PP											
Cable diameter	4.4 mm											
Bending radius	10 x cable diameter											
Storage temperature range	-30 °C – 90 °C											
Temperature range connector	-25 °C – 90 °C											
Temperature range cable fixed	-40 °C – 80 °C											
Temperature range cable moving	-25 °C – 80 °C											
Mechanical service life	-											
Weight (kg/piece)	0.02	0.03	0.04	0.05	0.06	0.16	0.05	0.06	0.08	0.10	0.13	0.31
Approvals	cULus											
Accessories												
	Article number	Type	PU									
Cable Markers 4x23mm	499988	LB M8/M12	5									
Torque setting tool M8	490090	DM-SET M8	1									

Actuator sensor interface - M12 / M8 – cables


Male M12 straight to female M8 straight with PUR cable
self-locking screwed connection
c-track compatible, halogen free



Dimensions



PIN assignment



Description	Part-No.	Type	PU	
3-pole				
Cable length (m)	0.3	422003	STG3-M12/KUG3-M8 0,3M-PUR	10
	0.6	422006	STG3-M12/KUG3-M8 0,6M-PUR	10
	1.0	422010	STG3-M12/KUG3-M8 1,0M-PUR	10
	1.5	422015	STG3-M12/KUG3-M8 1,5M-PUR	10
	2.0	422020	STG3-M12/KUG3-M8 2,0M-PUR	10
	5.0	422050	STG3-M12/KUG3-M8 5,0M-PUR	10


Technical data		3-pole				
Nominal voltage		AC/DC 24 V				
Nominal voltage range		max. 60 V				
Rated current		4 A				
Number of terminations		3				
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0
Status Indication		-				
Current Consumption per LED		-				
Coding		A (M12)				
Shielding		-				
General						
Form		M12 x 1, male straight / M8 x 1, female straight				
Rated insulation voltage (EN 50178)		100 V				
Test voltage		1.5 kV				
Pollution degree		3				
Insulation resistance		>10 ⁹ Ω				
Contact resistance		<5 mΩ				
Class of flammability according to UL 94		V0				
Protection class		IP 67 / IP 68 / IP 69K, in screwed condition				
Housing material		TPU black				
Contact material		CuSn, gold plated nickel				
Thread material		Zinc die-casting, nickel-plated				
Gasket		NBR				
Cable construction		3 x 0.25 mm ² (32 x 0.1)				
Cable jacket		PUR black				
Conductor insulation		PP				
Cable diameter		4.4 mm				
Bending radius		10 x cable diameter				
Storage temperature range		-30 °C – 90 °C				
Temperature range connector		-25 °C – 90 °C				
Temperature range cable fixed		-40 °C – 80 °C				
Temperature range cable moving		-25 °C – 80 °C				
Mechanical service life		-				
Weight (kg/piece)	0.02	0.03	0.04	0.05	0.06	0.16
Approvals		cULus				
Accessories		Article number	Type		PU	
Cable markers 4x23mm		499988	LB M8/M12		5	
Torque setting tool M8		490090	DM-SET M8		1	
Torque setting tool M12		490091	DM-SET M12		1	

Actuator sensor interface - M12 / M12 – cables

Male M12 straight to female M12, straight with PUR cable
self-locking screwed connection
c-track compatible, halogen free




Dimensions




PIN assignment

428003, 428006, 428010, 428015,
428020, 428050



429003, 429006, 429010, 429015,
429020, 429050



Description	Part-No.	Type	PU	
3-pole				
Cable length (m)	0.3	428003	STG3-M12/KUG3-M12 0,3M-PUR	10
	0.6	428006	STG3-M12/KUG3-M12 0,6M-PUR	10
	1.0	428010	STG3-M12/KUG3-M12 1,0M-PUR	10
	1.5	428015	STG3-M12/KUG3-M12 1,5M-PUR	10
	2.0	428020	STG3-M12/KUG3-M12 2,0M-PUR	10
	5.0	428050	STG3-M12/KUG3-M12 5,0M-PUR	10
4-pole				
Cable length (m)	0.3	429003	STG4-M12/KUG4-M12 0,3M-PUR	10
	0.6	429006	STG4-M12/KUG4-M12 0,6M-PUR	10
	1.0	429010	STG4-M12/KUG4-M12 1,0M-PUR	10
	1.5	429015	STG4-M12/KUG4-M12 1,5M-PUR	10
	2.0	429020	STG4-M12/KUG4-M12 2,0M-PUR	10
	5.0	429050	STG4-M12/KUG4-M12 5,0M-PUR	10

Technical data	3-pole	4-pole
Nominal voltage	AC/DC 24 V	
Nominal voltage range	max. 250 V	
Rated current	4 A	
Number of terminations	3	4
Cable length (m)	0.3 0.6 1.0 1.5 2.0 5.0	0.3 0.6 1.0 1.5 2.0 5.0
Status Indication	-	
Current Consumption per LED	-	
Coding	A	
Shielding	-	


General	
Form	M12 x 1, male straight / M12 x 1, female straight
Rated insulation voltage (EN 50178)	320 V
Test voltage	2.5 kV
Pollution degree	3
Insulation resistance	>10 ⁹ Ω
Contact resistance	<5 mΩ
Class of flammability according to UL 94	V0
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition
Housing material	TPU black
Contact material	CuSn, gold plated nickel
Thread material	Zinc die-casting, nickel-plated
Gasket	NBR
Cable construction	3 x 0.34 mm ² (42 x 0.1) 4 x 0.34 mm ² (42 x 0.1)
Cable jacket	PUR black
Conductor insulation	PP
Cable diameter	4.4 mm 4.7 mm
Bending radius	10 x cable diameter
Storage temperature range	-30 °C – 90 °C
Temperature range connector	-25 °C – 90 °C
Temperature range cable fixed	-40 °C – 80 °C
Temperature range cable moving	-25 °C – 80 °C
Mechanical service life	-
Weight (kg/piece)	0.04 0.06 0.08 0.10 0.13 0.24 0.05 0.07 0.09 0.11 0.14 0.26
Approvals	cULus
Accessories	
Cable markers 4x23mm	Article number: 499988 Type: LB M8/M12 PU: 5
Torque setting tool M12	Article number: 490091 Type: DM-SET M12 PU: 1

Actuator sensor interface - M12 / M12 – cables

Male M12 straight to female M12 straight with PUR cable
self-locking screwed connection
c-track compatible, halogen free




Dimensions




PIN assignment

442003, 442006, 442010, 442015,
442020, 442050



420050, 420003, 420006, 420010,
420015, 420020



Description	Part-No.	Type	PU	
5-pole				
Cable length (m)	0.3	442003	STG5-M12/KUG5-M12 0,3M-PUR	10
	0.6	442006	STG5-M12/KUG5-M12 0,6M-PUR	10
	1.0	442010	STG5-M12/KUG5-M12 1,0M-PUR	10
	1.5	442015	STG5-M12/KUG5-M12 1,5M-PUR	10
	2.0	442020	STG5-M12/KUG5-M12 2,0M-PUR	10
	5.0	442050	STG5-M12/KUG5-M12 5,0M-PUR	10
8-pole				
Cable length (m)	5.0	420050	STG8-M12/KUG8-M12 5,0M-PUR	10
	0.3	420003	STG8-M12/KUG8-M12 0,3M-PUR	10
	0.6	420006	STG8-M12/KUG8-M12 0,6M-PUR	10
	1.0	420010	STG8-M12/KUG8-M12 1,0M-PUR	10
	1.5	420015	STG8-M12/KUG8-M12 1,5M-PUR	10
	2.0	420020	STG8-M12/KUG8-M12 2,0M-PUR	10

Technical data	5-pole					8-pole					
Nominal voltage	AC/DC 24 V										
Nominal voltage range	max. 30 V										
Rated current	4 A					2 A					
Number of terminations	5					8					
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0	0.3	0.6	1.0	1.5	2.0
Status Indication	-										
Current Consumption per LED	-										
Coding	A										
Shielding	-										


General											
Form	M12 x 1, male straight / M12 x 1, female straight										
Rated insulation voltage (EN 50178)	63 V					36 V					
Test voltage	1.5 kV										
Pollution degree	3										
Insulation resistance	>10 ⁹ Ω										
Contact resistance	<5 mΩ										
Class of flammability according to UL 94	V0										
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition										
Housing material	TPU black										
Contact material	CuSn, gold plated nickel										
Thread material	Zinc die-casting, nickel-plated										
Gasket	NBR										
Cable construction	5 x 0.34 mm ² (42 x 0.1)					8 x 0.25 mm ² (32 x 0.1)					
Cable jacket	PUR black										
Conductor insulation	PP										
Cable diameter	5.0 mm					5.9 mm					
Bending radius	10 x cable diameter										
Storage temperature range	-30 °C – 90 °C										
Temperature range connector	-25 °C – 90 °C										
Temperature range cable fixed	-40 °C – 80 °C										
Temperature range cable moving	-25 °C – 80 °C										
Mechanical service life	-										
Weight (kg/piece)	0.05	0.06	0.09	0.11	0.14	0.30	0.05	0.06	0.09	0.11	0.14
Approvals	cULus										
Accessories											
	Article number					Type					PU
Cable markers 4x23mm	499988					LB M8/M12					5
Torque setting tool M12	490091					DM-SET M12					1

Actuator sensor interface - M12 / M12 – cables

Male M12 straight to female M12 angled with PUR cable
self-locking screwed connection
c-track compatible, halogen free




Dimensions

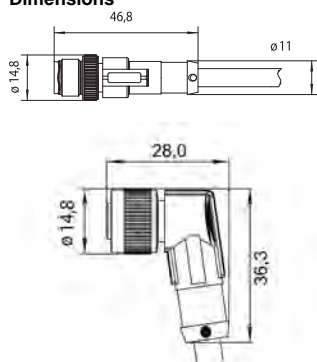


PIN assignment

467003, 467006, 467010, 467015,
467020, 467050



418003, 418006, 418010, 418015,
418020, 418050



Description	Part-No.	Type	PU	
3-pole				
Cable length (m)	0.3	467003	STG3-M12/KUW3-M12 0,3M-PUR	10
	0.6	467006	STG3-M12/KUW3-M12 0,6M-PUR	10
	1.0	467010	STG3-M12/KUW3-M12 1,0M-PUR	10
	1.5	467015	STG3-M12/KUW3-M12 1,5M-PUR	10
	2.0	467020	STG3-M12/KUW3-M12 2,0M-PUR	10
	5.0	467050	STG3-M12/KUW3-M12 5,0M-PUR	10
4-pole				
Cable length (m)	0.3	418003	STG4-M12/KUW4-M12 0,3M-PUR	10
	0.6	418006	STG4-M12/KUW4-M12 0,6M-PUR	10
	1.0	418010	STG4-M12/KUW4-M12 1,0M-PUR	10
	1.5	418015	STG4-M12/KUW4-M12 1,5M-PUR	10
	2.0	418020	STG4-M12/KUW4-M12 2,0M-PUR	10
	5.0	418050	STG4-M12/KUW4-M12 5,0M-PUR	10

Technical data	3-pole					4-pole						
Nominal voltage	AC/DC 24 V											
Nominal voltage range	max. 250 V											
Rated current	4 A											
Number of terminations	3					4						
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0	0.3	0.6	1.0	1.5	2.0	5.0
Status Indication	-											
Current Consumption per LED	-											
Coding	A											
Shielding	-											


General	M12 x 1, male straight / M12 x 1, female angled											
Form	M12 x 1, male straight / M12 x 1, female angled											
Rated insulation voltage (EN 50178)	320 V											
Test voltage	2.5 kV											
Pollution degree	3											
Insulation resistance	>10 ⁹ Ω											
Contact resistance	<5 mΩ											
Class of flammability according to UL 94	V0											
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition											
Housing material	TPU black											
Contact material	CuSn, gold plated nickel											
Thread material	Zinc die-casting, nickel-plated											
Gasket	NBR											
Cable construction	3 x 0.34 mm ² (42 x 0.1)					4 x 0.34 mm ² (42 x 0.1)						
Cable jacket	PUR black											
Conductor insulation	PP											
Cable diameter	4.4 mm					4.7 mm						
Bending radius	10 x cable diameter											
Storage temperature range	-30 °C – 90 °C											
Temperature range connector	-25 °C – 90 °C											
Temperature range cable fixed	-40 °C – 80 °C											
Temperature range cable moving	-25 °C – 80 °C											
Mechanical service life	-											
Weight (kg/piece)	0.03	0.04	0.06	0.08	0.10	0.22	0.05	0.06	0.08	0.10	0.13	0.24
Approvals	cULus											
Accessories												
	Article number					Type					PU	
Cable markers 4x23mm	499988					LB M8/M12					5	
Torque setting tool M12	490091					DM-SET M12					1	

Actuator sensor interface - M12 / M12 – cables

Male M12 straight to female M12 angled with PUR cable
self-locking screwed connection
c-track compatible, halogen free




Dimensions

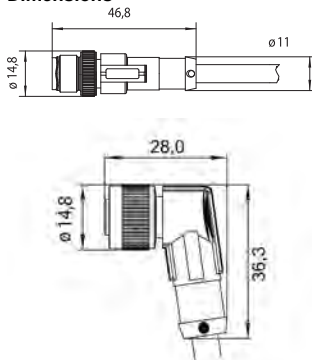


PIN assignment

440003, 440006, 440015, 440010,
440020, 440050



424003, 424006, 424010, 424015,
424020, 424050




Description	Part-No.	Type	PU									
5-pole												
Cable length (m)	0.3	440003	STG5-M12/KUW5-M12 0,3M-PUR	10								
	0.6	440006	STG5-M12/KUW5-M12 0,6M-PUR	10								
	1.5	440015	STG5-M12/KUW5-M12 1,5M-PUR	10								
	1.0	440010	STG5-M12/KUW5-M12 1,0M-PUR	10								
	2.0	440020	STG5-M12/KUW5-M12 2,0M-PUR	10								
	5.0	440050	STG5-M12/KUW5-M12 5,0M-PUR	10								
8-pole												
Cable length (m)	0.3	424003	STG8-M12/KUW8-M12 0,3M-PUR	10								
	0.6	424006	STG8-M12/KUW8-M12 0,6M-PUR	10								
	1.0	424010	STG8-M12/KUW8-M12 1,0M-PUR	10								
	1.5	424015	STG8-M12/KUW8-M12 1,5M-PUR	10								
	2.0	424020	STG8-M12/KUW8-M12 2,0M-PUR	10								
	5.0	424050	STG8-M12/KUW8-M12 5,0M-PUR	10								
Technical data												
	5-pole		8-pole									
Nominal voltage	AC/DC 24 V											
Nominal voltage range	max. 30 V											
Rated current	4 A		2 A									
Number of terminations	5		8									
Cable length (m)	0.3	0.6	1.5	1.0	2.0	5.0	0.3	0.6	1.0	1.5	2.0	5.0
Status Indication	-											
Current Consumption per LED	-											
Coding	A											
Shielding	-											
General												
Form	M12 x 1, male straight / M12 x 1, female straight											
Rated insulation voltage (EN 50178)	63 V						36 V					
Test voltage	1.5 kV											
Pollution degree	3											
Insulation resistance	>10 ⁹ Ω											
Contact resistance	<5 mΩ											
Class of flammability according to UL 94	V0											
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition											
Housing material	TPU black											
Contact material	CuSn, gold plated nickel											
Thread material	Zinc die-casting, nickel-plated											
Gasket	NBR											
Cable construction	5 x 0.34 mm ² (42 x 0.1)						8 x 0.25 mm ² (32 x 0.1)					
Cable jacket	PUR black											
Conductor insulation	PP											
Cable diameter	5.0 mm						5.9 mm					
Bending radius	10 x cable diameter											
Storage temperature range	-30 °C – 90 °C											
Temperature range connector	-25 °C – 90 °C											
Temperature range cable fixed	-40 °C – 80 °C											
Temperature range cable moving	-25 °C – 80 °C											
Mechanical service life	-											
Weight (kg/piece)	0.05	0.06	0.13	0.08	0.11	0.22	0.05	0.06	0.08	0.11	0.13	0.22
Approvals	cULus											
Accessories												
	Article number	Type	PU									
Cable markers 4x23mm	499988	LB M8/M12	5									
Torque setting tool M12	490091	DM-SET M12	1									

Actuator sensor interface - M12 / M12 – cables

Male M12 straight to female M12 angled with PUR cable and 360° shielding
self-locking screwed connection
c-track compatible, halogen free




Dimensions

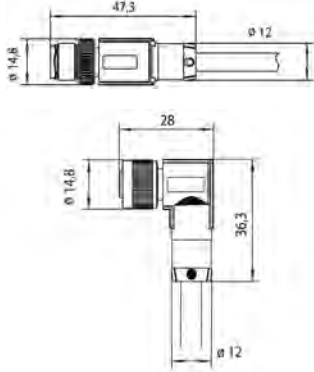


PIN assignment

457503, 457506, 457510, 457515,
457520, 457550



459203, 459206, 459210, 459215,
459220, 459250



Description	Part-No.	Type	PU
5-pole			
Cable length (m)	0.3	457503	STG5-M12/KUW5-M12 (C) 0,3M-PUR 10
	0.6	457506	STG5-M12/KUW5-M12 (C) 0,6M-PUR 10
	1.0	457510	STG5-M12/KUW5-M12 (C) 1,0M-PUR 10
	1.5	457515	STG5-M12/KUW5-M12 (C) 1,5M-PUR 10
	2.0	457520	STG5-M12/KUW5-M12 (C) 2,0M-PUR 10
	5.0	457550	STG5-M12/KUW5-M12 (C) 5,0M-PUR 10
8-pole			
Cable length (m)	0.3	459203	STG8-M12/KUW8-M12 (C) 0,3M-PUR 10
	0.6	459206	STG8-M12/KUW8-M12 (C) 0,6M-PUR 10
	1.0	459210	STG8-M12/KUW8-M12 (C) 1,0M-PUR 10
	1.5	459215	STG8-M12/KUW8-M12 (C) 1,5M-PUR 10
	2.0	459220	STG8-M12/KUW8-M12 (C) 2,0M-PUR 10
	5.0	459250	STG8-M12/KUW8-M12 (C) 5,0M-PUR 10

Technical data

	5-pole					8-pole						
Nominal voltage	AC/DC 24 V											
Nominal voltage range	max. 30 V											
Rated current	4 A					2 A						
Number of terminations	5					8						
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0	0.3	0.6	1.0	1.5	2.0	5.0
Status Indication	-											
Current Consumption per LED	-											
Coding	A											
Shielding	360°											


General

Form	M12 x 1, male straight / M12 x 1, female straight											
Rated insulation voltage (EN 50178)	63 V					36 V						
Test voltage	1.5 kV											
Pollution degree	3											
Insulation resistance	>10 ⁹ Ω											
Contact resistance	<5 mΩ											
Class of flammability according to UL 94	V0											
Protection class	IP 67 / IP 69K, in screwed condition											
Housing material	TPU black											
Contact material	CuSn, gold plated nickel											
Thread material	Zinc die-casting, nickel-plated											
Gasket	NBR											
Cable construction	5 x 0.34 mm ² (42 x 0.1)					8 x 0.25 mm ² (32 x 0.1)						
Cable jacket	PUR black											
Conductor insulation	PP											
Cable diameter	5.9 mm											
Bending radius	10 x cable diameter											
Storage temperature range	-30 °C – 90 °C											
Temperature range connector	-25 °C – 90 °C											
Temperature range cable fixed	-40 °C – 80 °C											
Temperature range cable moving	-25 °C – 80 °C											
Mechanical service life	-											
Weight (kg/piece)	0.06	0.08	0.11	0.13	0.17	0.33	0.05	0.06	0.08	0.11	0.13	0.22
Approvals	cULus											

Accessories

	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Action chart

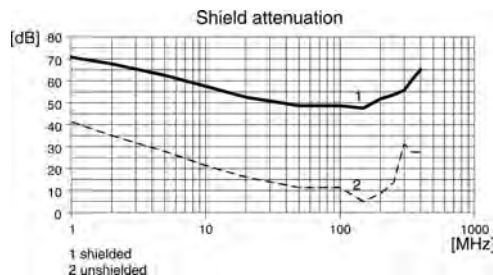


Actuator sensor interface - M12 / M12 – cables

Male M12 straight to female M12 angled with LEDs and PUR cable
self-locking screwed connection
c-track compatible, halogen free




Dimensions

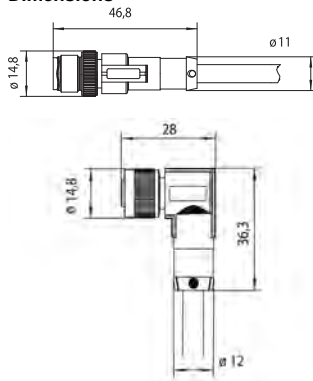


PIN assignment

431003



431006, 431010, 431015, 431020, 431050



Description	Part-No.	Type	PU
4-pole			
Cable length (m)	0.3	431003	STG4-M12/KUW4-M12 LED P 0,3M-PUR 10
	0.6	431006	STG4-M12/KUW4-M12 LED P 0,6M-PUR 10
	1.0	431010	STG4-M12/KUW4-M12 LED P 1,0M-PUR 10
	1.5	431015	STG4-M12/KUW4-M12 LED P 1,5M-PUR 10
	2.0	431020	STG4-M12/KUW4-M12 LED P 2,0M-PUR 10
	5.0	431050	STG4-M12/KUW4-M12 LED P 5,0M-PUR 10

Technical data		4-pole	
Nominal voltage		DC 24 V	
Nominal voltage range		DC 10 - 28 V	
Rated current		4 A	
Number of terminations		4	
Cable length (m)	0.3	0.6	1.0
		1.5	2.0
		5.0	
Status Indication	Operating voltage: LED green, I/O: LED yellow		
Current Consumption per LED	<10 mA		
Coding	A		
Shielding	-		

General	
Form	M12 x 1, male straight / M12 x 1, female angled with LEDs
Rated insulation voltage (EN 50178)	32 V
Test voltage	-
Pollution degree	3
Insulation resistance	>10 ⁹ Ω
Contact resistance	<5 mΩ
Class of flammability according to UL 94	V0
Protection class	IP 67 / IP 68 / IP 69K, in screwed condition
Housing material	TPU black / transparent
Contact material	CuSn, gold plated nickel
Thread material	Zinc die-casting, nickel-plated
Gasket	NBR
Cable construction	4 x 0.34 mm ² (42 x 0.1)
Cable jacket	PUR black
Conductor insulation	PP
Cable diameter	4.7 mm
Bending radius	10 x cable diameter
Storage temperature range	-30 °C – 90 °C
Temperature range connector	-25 °C – 90 °C
Temperature range cable fixed	-40 °C – 80 °C
Temperature range cable moving	-25 °C – 80 °C
Mechanical service life	-
Weight (kg/piece)	0.05
	0.06
	0.08
	0.10
	0.13
	0.24



Approvals		cULus	
Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Actuator sensor interface - M12 / valve suppressor


Male M12 straight to valve connector form A with protection device and LED status indication c-track compatible, halogen free




Dimensions



PIN assignment



Pin layout



Description	Part-No.	Type	PU	
Design A + Z-diode				
Cable length (m)	0.3	435003	STG3 M12/LZ-A 0,3m PUR	10
	0.6	435006	STG3 M12/LZ-A 0,6m PUR	10
	1.0	435010	STG3 M12/LZ-A 1,0m PUR	10
	1.5	435015	STG3 M12/LZ-A 1,5m PUR	10
	2.0	435020	STG3 M12/LZ-A 2,0m PUR	10
	5.0	435050	STG3 M12/LZ-A 5,0m PUR	10


Technical data		Design A + Z-diode					
Nominal voltage		AC/DC 24 V					
Nominal voltage range		10 – 28 V					
Rated current		4 A					
Rated frequency		50–60 Hz					
Protection device		Z-diode + LED					
Number of terminations		3					
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0	–
Status Indication		LED yellow					
Current Consumption per LED		<10 mA / LED					
Shut-off points		≥ 52V					
Holding Capacity		≤ 100VA					
General							
Form		M12x1, male straight / form A, contact clearance 18 mm					
Rated insulation voltage (EN 50178)		32 V					
Test voltage		–					
Pollution degree		3					
Insulation resistance		≥100 MΩ					
Contact resistance		<5 mΩ					
Class of flammability according to UL 94		V0					
Protection class		IP 67, in screwed condition					
Housing material		TPU black / transparent					
Contact material		CuSn, gold plated nickel					
Thread material		Zinc die-casting, nickel-plated					
Gasket		–					
Cable construction		3 × 0.5 mm ²					
Cable jacket		PUR black					
Conductor insulation		PP					
Cable diameter		4.5 mm					
Bending radius		10 × cable diameter					
Storage temperature range		-30 °C – 90 °C					
Temperature range connector		-20 °C – 85 °C					
Temperature range cable fixed		-40 °C – 80 °C					
Temperature range cable moving		-20 °C – 80 °C					
Mechanical service life		–					
Weight (kg/piece)	0.045	0.053	0.065	0.079	0.096	0.146	
Standards		EN 175301-803					
Approvals		–					
Accessories		Article number	Type			PU	
Cable markers 4x23mm		499988	LB M8/M12			5	
Torque setting tool M12		490091	DM-SET M12			1	
Comments							
Silicone free, Free from paint wetting impairment substances, resistant to microbes and hydrolysis. Very good resistance to acids, alkalines and solvents. The material resistance is based on the application for use with aggressive media.							

Actuator sensor interface - M12 / valve suppressor


Male M12 straight to valve connector form A for pressure switch with LED status indication c-track compatible, halogen free



Dimensions

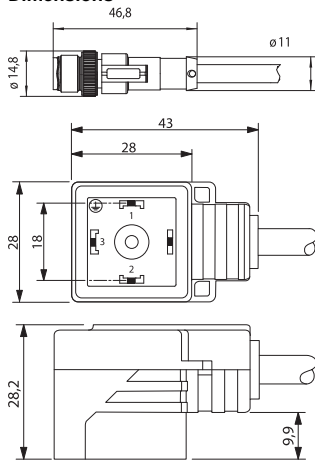

PIN assignment



Pin layout



Description	Part-No.	Type	PU	
Design A for Pressure switch				
Cable length (m)	0.3	445003	STG5 M12/LDS-A 0° 0,3m PUR	10
	0.6	445006	STG5 M12/LDS-A 0° 0,6m PUR	10
	1.0	445010	STG5 M12/LDS-A 0° 1,0m PUR	10
	1.5	445015	STG5 M12/LDS-A 0° 1,5m PUR	10
	2.0	445020	STG5 M12/LDS-A 0° 2,0m PUR	10
	5.0	445050	STG5 M12/LDS-A 0° 5,0m PUR	10

Technical data

Design A for Pressure switch	
Nominal voltage	DC 24 V
Nominal voltage range	DC 10 - 28 V
Rated current	4 A
Rated frequency	-
Protection device	-
Number of terminations	5
Cable length (m)	0.3 0.6 1.0 1.5 2.0 5.0
Status Indication	LED yellow/green
Current Consumption per LED	<10 mA / LED
Shut-off points	-
Holding Capacity	-

General

Form	M12x1, male straight / Form A, contact clearance 18 mm, 0°
Rated insulation voltage (EN 50178)	32 V
Test voltage	-
Pollution degree	3
Insulation resistance	≥100 MΩ
Contact resistance	<5 mΩ
Class of flammability according to UL 94	V0
Protection class	IP 67, in screwed condition
Housing material	TPU black / transparent
Contact material	CuSn, gold plated nickel
Thread material	Zinc die-casting, nickel-plated
Gasket	-
Cable construction	5 x 0.5 mm ²
Cable jacket	PUR black
Conductor insulation	PP
Cable diameter	5.3 mm
Bending radius	10 x cable diameter
Storage temperature range	-30 °C – 90 °C
Temperature range connector	-25 °C – 90 °C
Temperature range cable fixed	-40 °C – 80 °C
Temperature range cable moving	-20 °C – 70 °C
Mechanical service life	-
Weight (kg/piece)	0.064 0.078 0.096 0.119 0.142 0.280
Standards	EN 175301-803
Approvals	-

Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Comments




Silicone free, Free from paint wetting impairment substances, resistant to microbes and hydrolysis Very good resistance to acids, alkalines and solvents. The material resistance is based on the application for use with aggressive media.

Actuator sensor interface - M12 / valve suppressor


Male M12 straight to valve suppressor form B / form BI
with protection device and LED status indication
c-track compatible, halogen free




Dimensions



PIN assignment



Pin layout



Description	Part-No.	Type	PU	
Design B + Z-diode				
Cable length (m)	0.3	436003	STG3 M12/LZ-B 0° 0,3m PUR	10
	0.6	436006	STG3 M12/LZ-B 0° 0,6m PUR	10
	1.0	436010	STG3 M12/LZ-B 0° 1,0m PUR	10
	1.5	436015	STG3 M12/LZ-B 0° 1,5m PUR	10
	2.0	436020	STG3 M12/LZ-B 0° 2,0m PUR	10
	5.0	436050	STG3 M12/LZ-B 0° 5,0m PUR	10
Design BI + Z diode				
Cable length (m)	0.3	439003	STG3 M12/LZ-BI 0° 0,3m PUR	10
	0.6	439006	STG3 M12/LZ-BI 0° 0,6m PUR	10
	1.0	439010	STG3 M12/LZ-BI 0° 1,0m PUR	10
	1.5	439015	STG3 M12/LZ-BI 0° 1,5m PUR	10
	2.0	439020	STG3 M12/LZ-BI 0° 2,0m PUR	10
	5.0	439050	STG3 M12/LZ-BI 0° 5,0m PUR	10

Technical data

	Design B + Z-diode					Design BI + Z diode						
Nominal voltage	AC/DC 24 V											
Nominal voltage range	10 – 28 V											
Rated current	4 A											
Rated frequency	50–60 Hz											
Protection device	Z-diode + LED											
Number of terminations	3											
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0	0.3	0.6	1.0	1.5	2.0	5.0
Status Indication	LED yellow											
Current Consumption per LED	4mA / LED											
Shut-off points	≥ 52V											
Holding Capacity	≤ 100VA											

General

	M12x1, male straight / Form B	M12x1, male straight / Form BI
Form	M12x1, male straight / Form B	M12x1, male straight / Form BI
Rated insulation voltage (EN 50178)	32 V	
Test voltage	–	
Pollution degree	3	
Insulation resistance	≥100 MΩ	
Contact resistance	<5 mΩ	
Class of flammability according to UL 94	V0	
Protection class	IP 67, in screwed condition	
Housing material	TPU black / transparent	
Contact material	CuSn, gold plated nickel	
Thread material	Zinc die-casting, nickel-plated	
Gasket	–	
Cable construction	3 × 0.5 mm ²	
Cable jacket	PUR black	
Conductor insulation	PP	
Cable diameter	4.5 mm	
Bending radius	10 × cable diameter	
Storage temperature range	-30 °C – 90 °C	
Temperature range connector	-25 °C – 90 °C	
Temperature range cable fixed	-40 °C – 80 °C	
Temperature range cable moving	-20 °C – 70 °C	
Mechanical service life	–	

Weight (kg/piece)	0.06	0.07	0.09	0.11	0.14	0.28	0.06	0.07	0.09	0.11	0.14	0.28
	4	8	6	9	2	0	4	8	6	9	2	0

Standards	EN 175301-803											
-----------	---------------	--	--	--	--	--	--	--	--	--	--	--

Approvals	–											
-----------	---	--	--	--	--	--	--	--	--	--	--	--

Accessories	Article number	Type	PU
Cable markers 4x23mm	499988	LB M8/M12	5
Torque setting tool M12	490091	DM-SET M12	1

Comments




Silicone free, Free from paint wetting impairment substances, resistant to microbes and hydrolysis. Very good resistance to acids, alkalines and solvents. The material resistance is based on the application for use with aggressive media.

Actuator sensor interface - M12 / valve suppressor


Male M12 straight to valve suppressor form C / form CI
with protection device and LED status indication
c-track compatible, halogen free




Dimensions



PIN assignment



Pin layout



Description	Part-No.	Type	PU	
Design C + Z-diode				
Cable length (m)	0.3	438003	STG3 M12/LZ-C 0,3m PUR	10
	0.6	438006	STG3 M12/LZ-C 0,6m PUR	10
	1.0	438010	STG3 M12/LZ-C 1,0m PUR	10
	1.5	438015	STG3 M12/LZ-C 1,5m PUR	10
	2.0	438020	STG3 M12/LZ-C 2,0m PUR	10
	5.0	438050	STG3 M12/LZ-C 5,0m PUR	10
Design CI + Z-diode				
Cable length (m)	0.3	441003	STG3 M12/LZ-CI 0,3m PUR	10
	0.6	441006	STG3 M12/LZ-CI 0,6m PUR	10
	1.0	441010	STG3 M12/LZ-CI 1,0m PUR	10
	1.5	441015	STG3 M12/LZ-CI 1,5m PUR	10
	2.0	441020	STG3 M12/LZ-CI 2,0m PUR	10
	5.0	441050	STG3 M12/LV-CI 5,0m PUR	10

Technical data

	Design C + Z-diode					Design CI + Z-diode						
Nominal voltage	AC/DC 24 V											
Nominal voltage range	10 – 28 V											
Rated current	4 A											
Rated frequency	50–60 Hz											
Protection device	Z-diode + LED											
Number of terminations	3					3						
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0	0.3	0.6	1.0	1.5	2.0	5.0
Status Indication	LED yellow											
Current Consumption per LED	≤10 mA / LED											
Shut-off points	≥ 52V											
Holding Capacity	≤ 100VA											

General

	M12x1, male straight / Form C	M12x1, male straight / Form CI										
Form	M12x1, male straight / Form C	M12x1, male straight / Form CI										
Rated insulation voltage (EN 50178)	32 V											
Test voltage	–											
Pollution degree	3											
Insulation resistance	≥100 MΩ											
Contact resistance	> 5mΩ											
Class of flammability according to UL 94	V0											
Protection class	IP 67, in screwed condition											
Housing material	TPU black / transparent											
Contact material	CuSn, gold plated nickel											
Thread material	Zinc die-casting, nickel-plated											
Gasket	–											
Cable construction	3 × 0.5 mm ²											
Cable jacket	PUR black											
Conductor insulation	PP											
Cable diameter	4.5 mm											
Bending radius	10 x cable diameter											
Storage temperature range	-30 °C – 90 °C											
Temperature range connector	-25 °C – 90 °C											
Temperature range cable fixed	-40 °C – 80 °C											
Temperature range cable moving	-20 °C – 70 °C											
Mechanical service life	–											
Weight (kg/piece)	0.06 4	0.07 8	0.09 6	0.11 9	0.14 2	0.28 0	0.06 4	0.07 8	0.09 6	0.11 9	0.14 2	0.28 0

Standards

Standards	EN 175301-803			–
Approvals	–			
Accessories	Article number	Type	PU	
Cable markers 4x23mm	499988	LB M8/M12	200	
Torque setting tool M12	490091	DM-SET M12	1	
Cable markers 4x11mm	681313	BZT 0411	100	

Comments


Silicone free, Free from paint wetting impairment substances, resistant to microbes and hydrolysis. Very good resistance to acids, alkalines and solvents. The material resistance is based on the application for use with aggressive media.

Actuator sensor interface - M8 - connector


field wireable connector, M8 straight
Male / female
Screw terminal



Dimensions



Pin layout




Description	Part-No.	Type	PU	
Male				
Number of terminations	3	490035	STGK-M8 3POL SK	1
	4	490057	STGK-M8 4POL SK	1
Female				
Number of terminations	3	490037	KUGK-M8 3POL SK	1
	4	490059	KUGK-M8 4POL SK	1
Technical data				
Male		Female		
Nominal voltage	AC/DC 24 V			
Nominal voltage range	max. 60 V			
Rated current	4 A			
Number of terminations	3	4	3	4
Cable length (m)	-			
Status Indication	-			
Current Consumption per LED	-			
Coding	-			
Shielding	-			
General				
Termination	Screw terminal 0.14 – 0.5 mm ²			
Form	M8 x 1, male	M8 x 1, female		
Contact material	CuZn, gold-plated			
Gasket	-	NBR		
Test voltage	1.5 kV			
Pollution degree	3			
Insulation resistance	>10 ¹⁰ Ω			
Contact resistance	<3 mΩ			
Class of flammability according to UL 94	V0			
Protection class	IP 67, in screwed condition			
Housing material	PBT black			
Thread material	CuSn nickel plated			
Cable construction	-			
Cable jacket	-			
Conductor insulation	-			
Cable diameter	3.5 – 5 mm			
Bending radius	-			
Storage temperature range	-40 °C – 90 °C			
Temperature range connector	-25 °C – 85 °C			
Mechanical service life	>100 insertion cycles			
Weight (kg/piece)	0.040			
Approvals	-			

Actuator sensor interface - M8 - connector


field wireable connector, M8 straight
Male / female
IDC quick-connect technology



Dimensions

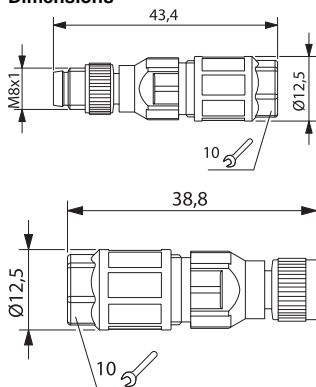


Pin layout



Description	Part-No.	Type	PU	
Male				
Number of terminations	3	490123	STGK-M8 3POL SNK	1
	4	490124	STGK-M8 4POL SNK	1
Female				
Number of terminations	3	490125	KUGK-M8 3POL SNK	1
	4	490126	KUGK-M8 4POL SNK	1
Technical data				
		Male	Female	
Nominal voltage	AC/DC 24 V			
Nominal voltage range	max. 60 V	max. 30 V	max. 60 V	max. 30 V
Rated current	-			
Number of terminations	3	4	3	4
Cable length (m)	-			
Status Indication	-			
Current Consumption per LED	-			
Coding	-			
Shielding	-			
General				
Termination	IDC 0.25 – 0.5 mm ² , AWG 22/24, class 2– 6			
Form	M8 x 1, male		M8 x 1, female	
Contact material	CuSn, gold-plated			
Gasket	-		NBR	
Test voltage	1.5 kV	0.8 kV	1.5 kV	0.8 kV
Pollution degree	3			
Insulation resistance	≥100 MΩ			
Contact resistance	≤5 mΩ			
Class of flammability according to UL 94	V0			
Protection class	IP 67, in screwed condition			
Housing material	PA 6 black			
Thread material	CuSn nickel plated			
Cable construction	-			
Cable jacket	-			
Conductor insulation	PVC / PE / PP			
Cable diameter	2.5 – 5 mm			
Bending radius	-			
Storage temperature range	-40 °C – 90 °C			
Temperature range connector	-40 °C – 80 °C			
Mechanical service life	10x connection of cables with the same gauge			
Weight (kg/piece)	0.008		0.007	
Standards	IEC 61076-2-104			

Mounting diagram




Actuator sensor interface - M12 - connector



field wireable connector, M12 straight
Male - A coded
Screw terminal



Dimensions



Pin layout




Description	Part-No.	Type	PU	
Male				
Number of terminations	4	490017	STGK-M12 4POL SK	1
	5	490018	STGK-M12 5POL SK	1
	8	490070	STGK-M12 8POL SK	1
Technical data				
Nominal voltage		Male		
		AC/DC 24 V		
Nominal voltage range	250 V	125 V	60 V	
Rated current	4 A	2 A		
Number of terminations	4	5	8	
Cable length (m)		-		
Status Indication		-		
Current Consumption per LED		-		
Coding		A		
Shielding		-		
General				
Form		M12 x 1, male		
Rated insulation voltage (EN 50178)	2.5 kV	1.5 kV	800 V	
Test voltage	2.95 kV	1.75 kV	910 V	
Pollution degree		-		
Insulation resistance		>10 ¹⁰ Ω		
Contact resistance		<3 mΩ		
Class of flammability according to UL 94		V0		
Protection class		IP 67, in screwed condition		
Housing material		PBT black		
Contact material		CuZn, gold-plated		
Thread material		CuSn nickel plated		
Gasket		-		
Cable construction		-		
Cable jacket		-		
Conductor insulation		-		
Cable diameter	4 – 6 mm	6 – 8 mm		
Bending radius		-		
Storage temperature range		-40 °C – 90 °C		
Temperature range connector		-25 °C – 85 °C		
Termination		Screw terminal		
Mechanical service life		>100 insertion cycles		
Weight (kg/piece)		0.040		
Approvals		-		

Actuator sensor interface - M12 - connector


field wireable connector, M12 straight
Female - A coded
Screw terminal



Dimensions



Pin layout




Description	Part-No.	Type	PU	
Female				
Number of terminations	4	490011	KUGK-M12 4POL SK	1
	5	490012	KUGK-M12 5POL SK	1
	8	490071	KUGK-M12 8POL SK	1
Technical data				
Nominal voltage		Female		
		AC/DC 24 V		
Nominal voltage range	250 V	125 V	60 V	
Rated current	4 A	2 A		
Number of terminations	4	5	8	
Cable length (m)		-		
Status Indication		-		
Current Consumption per LED		-		
Coding		A		
Shielding		-		
General				
Form		M12 x 1, female		
Test voltage	2.95 kV	1.75 kV	910 V	
Pollution degree		3		
Insulation resistance		>10 ¹⁰ Ω		
Contact resistance		<3 mΩ		
Class of flammability according to UL 94		V0		
Protection class		IP 67, in screwed condition		
Housing material		PBT black		
Contact material		CuZn, gold-plated		
Thread material		CuSn nickel plated		
Gasket		-		
Cable construction		-		
Cable jacket		-		
Conductor insulation		-		
Cable diameter	4 – 6 mm	6 – 8 mm		
Bending radius		-		
Storage temperature range		-40 °C – 90 °C		
Temperature range connector		-25 °C – 85 °C		
Termination		Screw terminal		
Gauge	max. 0.75 mm ²	max. 0.5 mm ²		
Mechanical service life		>100 insertion cycles		
Weight (kg/piece)		0.040		
Approvals		-		

Actuator sensor interface - M12 - connector


field wireable connector, M12 angled
 Male - A coded
 Screw terminal



Dimensions



Pin layout



Description	Part-No.	Type	PU	
Male				
Number of terminations	4	490020	STWK-M12 4POL SK	1
	5	490021	STWK-M12 5POL SK	1


Technical data		Male	
Nominal voltage		AC/DC 24 V	
Nominal voltage range	250 V		60 V
Rated current		4 A	
Number of terminations	4		5
Cable length (m)		-	
Status Indication		-	
Current Consumption per LED		-	
Coding		A	
Shielding		-	
General			
Form		M12 x 1, male, angled	
Test voltage	2.95 kV		1.75 kV
Pollution degree		3	
Insulation resistance		>10 ¹⁰ Ω	
Contact resistance		<3 mΩ	
Class of flammability according to UL 94		V0	
Protection class		IP 67, in screwed condition	
Housing material		PBT black	
Contact material		CuZn, gold-plated	
Thread material		CuSn nickel plated	
Gasket		-	
Cable construction		-	
Cable jacket		-	
Conductor insulation		-	
Cable diameter		4 – 6 mm	
Bending radius		-	
Storage temperature range		-40 °C – 90 °C	
Temperature range connector		-25 °C – 85 °C	
Termination		Screw terminal	
Gauge		max. 0.75 mm ²	
Mechanical service life		>100 insertion cycles	
Weight (kg/piece)		0.040	
Approvals		-	

Actuator sensor interface - M12 - connector


field wireable connector, M12 angled
Female - A coded
Screw terminal



Dimensions



Pin layout



Description	Part-No.	Type	PU	
Female				
Number of terminations	4	490014	KUWK-M12 4POL SK	0
	5	490015	KUWK-M12 5POL SK	0

Technical data		Female	
Nominal voltage		AC/DC 24 V	
Nominal voltage range	250 V		60 V
Rated current		4 A	
Number of terminations	4		5
Cable length (m)		-	
Status Indication		-	
Current Consumption per LED		-	
Coding		A	
Shielding		-	
General			
Form		M12 x 1, female angled	
Test voltage	2.95 kV		1.75 kV
Pollution degree		3	
Insulation resistance		>10 ¹⁰ Ω	
Contact resistance		<3 mΩ	
Class of flammability according to UL 94		V0	
Protection class		IP 67, in screwed condition	
Housing material		PBT black	
Contact material		CuZn, gold-plated	
Thread material		CuSn nickel plated	
Gasket		NBR	
Cable construction		-	
Cable jacket		-	
Conductor insulation		-	
Cable diameter		4 – 6 mm	
Bending radius		-	
Storage temperature range		-40 °C – 90 °C	
Temperature range connector		-25 °C – 85 °C	
Termination		Screw terminal	
Gauge		max. 0.75 mm ²	
Mechanical service life		>100 insertion cycles	
Weight (kg/piece)		0.040	
Approvals		-	

Actuator sensor interface - M12 - connector


field wireable connector, M12 straight

Male / female - A coded


Fast connection method; IDC method of termination



Dimensions

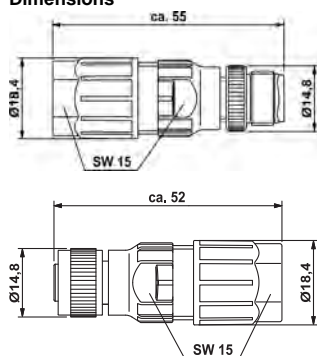

Pin layout





Description	Part-No.	Type	PU	
Male				
Number of terminations	4	490028	STGK-M12 4POL SNK	1
Female				
Number of terminations	4	490029	KUGK-M12 4POL SNK	1
Technical data				
		Male	Female	
Nominal voltage		AC/DC 24 V		
Nominal voltage range		250 V		
Rated current		4 A		
Number of terminations		4		
Cable length (m)		-		
Status Indication		-		
Current Consumption per LED		-		
Coding		A		
Shielding		-		
General				
Form	M12 x 1, male		M12 x 1, female	
Test voltage		2.5 kV		
Pollution degree		3		
Insulation resistance		>10 ⁹ Ω		
Contact resistance		<5 mΩ		
Class of flammability according to UL 94		V0		
Protection class		IP 67, in screwed condition		
Housing material		PBT black		
Contact material		CuZn, gold-plated		
Thread material		CuSn nickel plated		
Gasket	-		NBR	
Cable construction		-		
Cable jacket		-		
Conductor insulation		-		
Cable diameter		4 - 7.5 mm		
Bending radius		-		
Storage temperature range		-40 °C - 90 °C		
Temperature range connector		-25 °C - 80 °C		
Termination		IDC method of termination		
Gauge		0.34-0.75 mm ²		
Mechanical service life		>100 insertion cycles		
Weight (kg/piece)		0.030		
Approvals		-		

Actuator sensor interface - M12, M12/M8 -connector

T piece


Male M12 to 2x female M12, 5pin PIN 2+4 bridged + PE

Male M12 4pin to 2x female M8, 3pin




PIN assignment

490026



490038



Description	Part-No.	Type	PU
Number of terminations	5	AST M 12/2xM 12	10
	3	AST M 12/2xM 8	10

Technical data

	490026	490038
Nominal voltage		AC/DC 24 V
Nominal voltage range	DC 60V	DC 30V
Rated current	4 A	3 A
Number of terminations	5	3
Cable length (m)		-
Status Indication		-
Current Consumption per LED		-
Coding		A
Shielding		-

General

Form	M12 x 1 male / M12 x 1 female	M12 x 1 male / M8 x 1 female
Rated insulation voltage (EN 50178)		60 V
Test voltage		1.5 kV
Pollution degree		3
Insulation resistance		≥ 10 GΩ
Contact resistance		≤ 5mΩ
Class of flammability according to UL 94		HB
Protection class		-
Housing material		TPU black
Contact material		CuZn, gold plated nickel
Thread material		Zinc die-casting, nickel-plated
Gasket		NBR
Cable construction		-
Cable jacket		-
Cable diameter		-
Conductor insulation		-
Bending radius		-
Storage temperature range		-25 – 90 °C
Temperature range connector		-25 °C – 90 °C
Termination		-
Mechanical service life		>100 insertion cycles
Weight (kg/piece)	0.0290	0.0140
Field installation	Torque max. 0,4 Nm	Torque max. 0.4 Nm (M8 at 0.2 Nm)

Approvals


Accessories	Article number	Type	PU
Dynamometric key M12	490090	DM-SET M8	1
Dynamometric key M12	490091	DM-SET M12	1

Actuator sensor interface - M12 - connector





field wireable connector, M12 straight shielded
Male / female - A coded (CAN)
Screw terminal



Dimensions



Pin layout



Description	Part-No.	Type	PU	
Male				
Number of terminations	4	490050	STGK4-M12 (C)-A	1
	5	490051	STGK5-M12 (C)-A	1
	8	490054	STGK8-M12 (C)-A	1
Female				
Number of terminations	4	490052	KUGK4-M12 (C)-A	1
	5	490053	KUGK5-M12 (C)-A	1
	8	490077	KUGK8-M12 (C)-A	1

Technical data	Male			Female		
Nominal voltage	AC/DC 24 V					
Nominal voltage range	250 V	60 V	30 V	250 V	60 V	30 V
Rated current	4 A		2 A	4 A		2 A
Number of terminations	4	5	8	4	5	8
Cable length (m)	-					
Status Indication	-					
Current Consumption per LED	-					
Coding	A					
Shielding	360°					

General	M12 x 1, male			M12 x 1, female		
Form	M12 x 1, male			M12 x 1, female		
Test voltage	2.5 kV	1.5 kV	800 V	2.5 kV	1.5 kV	800 V
Pollution degree	3					
Insulation resistance	>10 ¹⁰ Ω					
Contact resistance	<3 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 67, in screwed condition					
Housing material	Zinc die-casting, nickel-plated					
Contact material	CuZn, gold-plated					
Thread material	CuSn nickel plated					
Gasket	-			NBR		
Cable construction	-					
Cable jacket	-					
Conductor insulation	-					
Cable diameter	6 – 8 mm					
Bending radius	-					
Storage temperature range	-40 °C – 90 °C					
Temperature range connector	-25 °C – 85 °C					
Termination	Screw terminal					
Gauge	max. 0.75 mm ²		max. 0.5 mm ²	max. 0.75 mm ²		max. 0.5 mm ²
Mechanical service life	>100 insertion cycles					
Weight (kg/piece)	0.050					
Approvals	-					

Comments


5-pole variant for device - network suitable

Actuator sensor interface - M12 - connector



field wireable connector, M12 straight shielded
 Male / female - B coded (Profibus, Interbus)
 Screw terminal



Dimensions



Pin layout



Description	Part-No.	Type	PU	
Male				
Number of terminations	5	490072	STGK5-M12 (C)-B	1
Female				
Number of terminations	5	490073	KUGK5-M12 (C)-B	1
Technical data				
	Male	Female		
Nominal voltage		AC/DC 24 V		
Nominal voltage range		max. 60 V		
Rated current		4 A		
Number of terminations		5		
Cable length (m)		-		
Status Indication		-		
Current Consumption per LED		-		
Coding		B		
Shielding		360°		
General				
Form	M12 x 1, male	M12 x 1, female		
Test voltage		1.5 kV		
Pollution degree		3		
Insulation resistance		>10 ¹⁰ Ω		
Contact resistance		<3 mΩ		
Class of flammability according to UL 94		V0		
Protection class		IP 67, in screwed condition		
Housing material		Zinc die-casting, nickel-plated		
Contact material	CuZn, gold-plated	CuSn, gold-plated		
Thread material		CuSn nickel plated		
Gasket		-		
Cable construction		-		
Cable jacket		-		
Conductor insulation		-		
Cable diameter		6 – 8 mm		
Bending radius		-		
Storage temperature range		-40 °C – 90 °C		
Temperature range connector		-25 °C – 85 °C		
Termination		Screw terminal		
Gauge		max. 0.75 mm ²		
Mechanical service life		>100 insertion cycles		
Weight (kg/piece)		0.040		
Approvals		-		

Comments


suitable for Profibus and Interbus.

Actuator sensor interface - M12 - connector


field wireable connector, M12 straight shielded
Male / female - D coded (Ethernet)
Screw terminal



Dimensions



Pin layout



Description	Part-No.	Type	PU
Male			
Number of terminations	4	490074	STGK4-M12 (C)-D
			1
Technical data		Male	
Nominal voltage		AC/DC 24 V	
Nominal voltage range		max. 60 V	
Rated current		4 A	
Number of terminations		4	
Cable length (m)		-	
Status Indication		-	
Current Consumption per LED		-	
Coding		D	
Shielding		360°	
General			
Form		M12 x 1, male	
Test voltage		2.95 kV	
Pollution degree		3	
Insulation resistance		>10 ¹⁰ Ω	
Contact resistance		<3 mΩ	
Class of flammability according to UL 94		V0	
Protection class		IP 67, in screwed condition	
Housing material		Zinc die-casting, nickel-plated	
Contact material		CuZn, gold-plated	
Thread material		CuSn nickel plated	
Gasket		-	
Cable construction		-	
Cable jacket		-	
Conductor insulation		-	
Cable diameter		6 – 8 mm	
Bending radius		-	
Storage temperature range		-40 °C – 90 °C	
Temperature range connector		-25 °C – 85 °C	
Termination		Screw terminal	
Gauge		0.14–0.75 mm ²	
Mechanical service life		>100 insertion cycles	
Weight (kg/piece)		0.050	
Approvals		-	

Comments


Ethernet suitable

Actuator sensor interface - M12 - connector

field wireable connector, M12 straight shielded
 Female - D coded (Ethernet)
 Shield termination via iris spring, cage clamp




Dimensions



Pin layout



Mounting diagram



Description	Part-No.	Type	PU	
Male				
Description	Male	490095	KUGK4-M12 (C)-D	1
Technical data				
		4		
Nominal voltage	AC/DC 24 V			
Nominal voltage range	max. 60 V			
Rated current	Max. 4 A per contact			
Number of terminations	4			
Cable length (m)	-			
Status Indication	-			
Current Consumption per LED	-			
Coding	D			
Shielding	360°			
General				
Form	M12 × 1, female			
Rated insulation voltage (EN 50178)	60 V			
Test voltage	0.8 kV			
Pollution degree	3			
Insulation resistance	>10 ¹⁰ Ω			
Contact resistance	<8 mΩ			
Class of flammability according to UL 94	V0			
Protection class	IP 67, in screwed condition			
Housing material	Zinc die-casting, nickel-plated			
Contact material	CuSn, gold-plated			
Thread material	CuSn nickel plated			
Gasket	NBR			
Cable construction	-			
Cable jacket	-			
Conductor insulation	-			
Cable diameter	4 – 8 mm			
Bending radius	-			
Storage temperature range	-40 °C – 90 °C			
Temperature range connector	-40 °C – 85 °C			
Termination	Cage clamp 0.14 mm ² – 0.5 mm ² / 26 AWG – 20 AWG			
Mechanical service life	≥ 100 insertion cycles			
Weight (kg/piece)	0.042			
Approvals	-			

Actuator sensor interface - M12 panel jack


M12 connectors panel mounted using M16 thread

Male / female - A coded





0.5 m TPE wire




Dimensions



Pin layout



Mounting diagram



Description	Part-No.	Type	PU	
Male				
Number of terminations	4	490067	STGE4-M12 0,5m	1
	5	490068	STGE5-M12 0,5m	1
	8	490069	STGE8-M12 0,5m	1
Female				
Number of terminations	4	490064	KUGE4-M12 0,5m	1
	5	490065	KUGE5-M12 0,5m	1
	8	490066	KUGE8-M12 0,5m	1

Technical data	Male			Female		
Nominal voltage	AC/DC 24 V					
Nominal voltage range	max. 250 V	max. 60 V	max. 30 V	max. 250 V	max. 60 V	max. 30 V
Rated current	4 A		2 A	4 A		2 A
Number of terminations	4	5	8	4	5	8
Cable length (m)	0.5					
Status Indication	-					
Current Consumption per LED	-					
Coding	A					
Shielding	-					
General						
Form	M12 x 1, male			M12 x 1, female		
Test voltage	2.5 kV	1.5 kV	800 V	2.5 kV	1.5 kV	800 V
Pollution degree	3					
Insulation resistance	≥100 MΩ					
Contact resistance	≤3 mΩ					
Class of flammability according to UL 94	V0					
Protection class	IP 67, in screwed condition					
Housing material	Zinc die-casting, nickel-plated					
Contact material	CuZn, gold-plated					
Thread material	CuSn nickel plated					
Gasket	-			NBR		
Cable construction	Individual strands: 0.34 mm ² (7x0.25 mm) / 0.25 mm ² (14x0.15 mm)					
Cable jacket	-					
Conductor insulation	TPE-wire, coloured					
Cable diameter	0,34 mm ² : 1.25 mm / 0.25 mm ² : 1.15 mm					
Bending radius	-					
Storage temperature range	-40 °C – 90 °C					
Temperature range connector	-25 °C – 90 °C					
Termination	Thread M16					
Gauge	4x0.34 mm ²	5x0.34 mm ²	8x0.25 mm ²	4x0.34 mm ²	5x0.34 mm ²	8x0.25 mm ²
Mechanical service life	>100 insertion cycles					
Weight (kg/piece)	0.020	0.021	0.025	0.020	0.021	0.025

Accessories	Article number	Type	PU
Counter nut M16	600361	GMS M 16 x 1.5	100

Comments

Connection assignment

Pole / wire color:

- 1/ BN (brown)
- 2/ WH (white)
- 3/ BU (blue)
- 4/ BK (black)

- 1/ BN (brown)
- 2/ WH (white)
- 3/ GN (green)
- 4/ YE (yellow)
- 5/ GY (grey)
- 6/ PK (pink)
- 7/ BU (blue)
- 8/ RD (red)


Actuator sensor interface - M8 panel jack

M8 panel connectors using M8 thread


Male / female
0,5M TPE wire



Dimensions

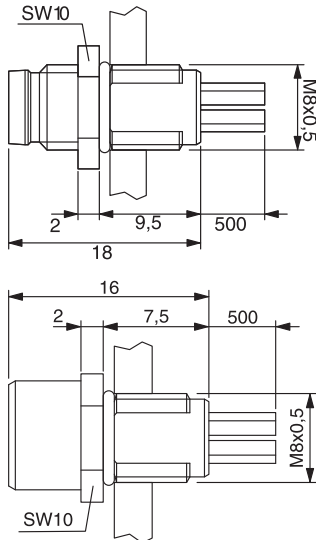


Pin layout



Mounting diagram

assembling board with through bore-hole
2:1



Description	Part-No.	Type	PU	
Male				
Number of terminations	3	490062	STGE3-M8 0,5m	1
	4	490063	STGE4-M8 0,5m	1
Female				
Number of terminations	3	490060	KUGE3-M8 0,5m	1
	4	490061	KUGE4-M8 0,5m	1
Technical data				
		Male	Female	
Nominal voltage	AC/DC 24 V			
Nominal voltage range	max. 60 V	max. 30 V	max. 60 V	max. 30 V
Rated current	4 A			
Number of terminations	3	4	3	4
Cable length (m)	0.5			
Status Indication	-			
Current Consumption per LED	-			
Coding	-			
Shielding	-			
General				
Form	M8 x 1, male		M8 x 1, female	
Test voltage	1.5 kV	0.8 kV	1.5 kV	0.8 kV
Pollution degree	3			
Insulation resistance	≥100 MΩ			
Contact resistance	≤3 mΩ			
Class of flammability according to UL 94	HB			
Protection class	IP 67, in screwed condition			
Housing material	Zinc die-casting, nickel-plated			
Contact material	CuZn, gold-plated			
Thread material	CuSn nickel plated			
Gasket	-		NBR	
Cable construction	Individual strands: 0.25 mm ² (14x0.15 mm)			
Cable jacket	-			
Conductor insulation	TPE-wire, coloured			
Cable diameter	-			
Bending radius	-			
Storage temperature range	-40 °C – 90 °C			
Temperature range connector	-25 °C – 85 °C			
Termination	Thread M8			
Gauge	3x0.25 mm ²	4x0.25 mm ²	3x0.25 mm ²	4x0.25 mm ²
Mechanical service life	>100 insertion cycles			
Weight (kg/piece)	0.012	0.014	0.012	0.014
Approvals	-			

Comments

Included in scope of delivery: M8 lock nut

Connection assignment

Pole / wire colour:

- 1/ BN (brown)
- 3/ BU (blue)
- 4/ BK (black)


- 1/ BN (brown)
- 2/ WH (white)
- 3/ BU (blue)
- 4/ BK (black)

Actuator sensor interface - M12 - panel jack ETHERNET


M12 panel connector using M16 thread Including Ethernet Cable Female - D coded (Ethernet Cat.5e) Cable, shielded, halogen free



Dimensions



Pin layout



Description	Part-No.	Type	PU	
Female				
Cable length (m)	0.5	490082	KUGE4-M12 /ET 0,5m PUR	10
	1.0	490083	KUGE4-M12 /ET 1,0m PUR	10
	2.0	490084	KUGE4-M12 /ET 2,0m PUR	10
	5.0	490085	KUGE4-M12 /ET 5,0m PUR	10

Technical data		Female		
Nominal voltage		AC/DC 24 V		
Nominal voltage range		max. 60 V		
Rated current		4 A		
Number of terminations		4		
Cable length (m)	0.5	1.0	2.0	5.0
Status Indication		-		
Current Consumption per LED		-		
Coding		D		
Shielding		360°		
General				
Form		M12 x 1, female		
Test voltage		2.5 kV		
Pollution degree		3		
Insulation resistance		≥100 MΩ		
Contact resistance		≤3 mΩ		
Class of flammability according to UL 94		HB		
Protection class		IP 67, in screwed condition		
Housing material		Zinc die-casting, nickel-plated		
Contact material		CuZn, gold-plated		
Thread material		CuSn nickel plated		
Gasket		NBR		
Cable construction		2 x 2 x AWG 26/7		
Cable jacket		-		
Conductor insulation		PE PUR sea blue		
Cable diameter		6.7 mm		
Bending radius		15 x cable diameter		
Storage temperature range		-40 °C – 90 °C		
Temperature range connector		-25 °C – 90 °C		
Temperature range cable fixed				
Temperature range cable moving				
Weight (kg/piece)	0.055	0.078	0.133	0.281
Approvals		-		
Accessories		Article number	Type	PU
Counter nut M16		600361	GMS M 16 x 1.5	100
Comments				

Connection assignment

Pole / wire colour:


- 1/ YE (yellow)
- 2/ WH (white)
- 3/ OG (orange)
- 4/ BU (blue)

Actuator sensor interface - USB-panel connector


USB-panel connector for front installation with M22 thread
 USB connector Typ A on straight USB plug Type A with PVC cable
 Type: UBS-2.0 A/A




Dimensions



PIN assignment



Mounting diagram



Description	Part-No.	Type	PU	
USB				
Cable length (m)	0.3	499991	USB-2.0 A/A 0,3m PVC	10
	0.6	499992	USB-2.0 A/A 0,6m PVC	10
	0.8	490076	USB-2.0 A/A 0,8m PVC	10
	1.5	490078	USB-2.0 A/A 1,5m PVC	10
	2.0	490079	USB-2.0 A/A 2,0m PVC	10
	3.0	490080	USB-2.0 A/A 3,0m PVC	10
	5.0	490081	USB-2.0 A/A 5,0m PVC	10

Technical data

Technical data		USB	
Nominal voltage		AC/DC 5 V	
Nominal voltage range		max. 30 V	
Rated current		500 mA	
Number of terminations		4	
Cable length (m)	0.3 0.6 0.8 1.5 2.0 3.0 5.0		
Transfer rate		max. 480 Mbit/s	
USB standard		2.0	
Contact type		1 : 1	
Shielding		yes	

General

Form	USB-A						
Test voltage	-						
Pollution degree	3						
Insulation resistance	≥100 MΩ						
Contact resistance	≤30 mΩ						
Class of flammability according to UL 94	V0						
Protection class	IP 65 in closed and IP 20 in inserted condition						
Housing material	Connector: PA; plug: PBT, cover: TPU						
Contact material	CuSn, gold-plated						
Field installation	Front plate cutout D=22.5mm						
Cable construction	Supply: 2×AWG24; Data: 2×AWG28						
Cable jacket	PVC						
Cable diameter	4.5 mm						
Bending radius	15 x cable diameter						
Storage temperature range	-25 °C – 80 °C						
Operation temperature range	0 °C – 70 °C						
Temperature range connector	-						
Mechanical service life	>100 insertion cycles						
Dimension	(D×T) 29.5 × 29 mm, installation depth appr. 70 mm						
Weight (kg/piece)	0.035	0.044	0.055	0.060	0.065	0.090	0.110
Approvals	-						

Comments


Included in the delivery: captive safety cap

Actuator sensor interface - RJ45 panel connector

RJ45 panel connector for front installation 22.5 mm
female/female 1:1
Category 5e/6




Dimensions




Circuit diagram


492075




491075



Mounting diagram



front view:



Description	Part-No.	Type	PU
Category			
Cat.5e	492075	RJ45 F/F 8/8 Cat.5e	1
Cat.6	491075	RJ45 F/F 8/8 Cat.6	1


Technical data	492075	491075
Nominal voltage		AC 24 V
Nominal voltage range		AC 150 V
Rated current		1.5 A
Number of terminations		8
Cable length (m)		–
Transmission speed	100 MHz	250 MHz
Category	5e	6
Contact type		1 : 1
Shielding	shield connected through	360° shielding
Coding		–
General		
Form		RJ45
Rated insulation voltage (EN 50178)		–
Test voltage		–
Pollution degree		3
Insulation resistance		≥100 MΩ
Contact resistance		≤30 mΩ
Class of flammability according to UL 94		V0
Protection class	IP 65 and NEMA UL Type 12 in closed and IP 20 in inserted condition	
Housing material	PA-GF25; PBT Gf20; cover TPU	
Cover	TPU	
Contact material	CuSn, gold-plated	
Field installation	Front plate cutout D=22.5mm	
Installation depth	approx. 70 mm	
Cable construction	8 (4-pair)	
Cable jacket	–	
Cable diameter	–	
Bending radius	–	
Operation temperature range	-25 °C – 70 °C	
Storage temperature range	-25 °C – 80 °C	
Mechanical service life	<750 insertion cycles	
Dimension	(?)x(D) 29.5 × 29 mm	
Weight (kg/piece)	0.016	
Approvals	cULus	
Standards	–	

Actuator sensor interface - RJ45 panel connector

Control cabinet bushing M12 - RJ45 female/female 1:1 Category 5e




Dimensions




Circuit diagram


490105, 490106



490107, 490108



Mounting diagram



Description	Part-No.	Type	PU
4 pole 90°	490105	M12-R45 F/F 90° 4/4 Cat.5e PROFINET	1
4 pole 180°	490106	M12-R45 F/F 180° 4/4 Cat.5e PROFI- NET	1
8 pole 90°	490107	M12-R45 F/F 90° 8/8 Cat.5e	1
8 pole 180°	490108	M12-R45 F/F 180° 8/8 Cat.5e	1

Technical data	490105	490106	490107	490108
Nominal voltage			24 V	
Nominal voltage range			50 V	
Rated current			max. 1 A per contact	
Number of terminations	4			8
Cable length (m)			-	
Transmission speed		100 Mbit/s		1 Gbit/s
Category	5e			6
Contact type			1 : 1	
Shielding			360° shielding	
Coding	D			A

General	
Form	RJ45 / M12 x 1
Rated insulation voltage (EN 50178)	-
Test voltage	-
Pollution degree	3
Insulation resistance	≥100 MΩ
Contact resistance	≤30 mΩ
Class of flammability according to UL 94	V0
Protection class	IP 67 in screwed condition
Housing material	PA
Cover	-
Contact material	Phosphor bronze, gold-plated
Field installation	-
Installation depth	approx. 70 mm
Cable construction	-
Cable jacket	-
Cable diameter	-
Bending radius	-
Operation temperature range	-25 °C – 85 °C
Storage temperature range	-25 °C – 85 °C
Mechanical service life	≥ 750 insertion cycles
Dimension	(?xD) 29.5 x 29 mm
Weight (kg/piece)	0.037
Approvals	-
Standards	PROFINET

Actuator sensor interface

Protective cover
M8, M12
Colour: black




Description	Part-No.	Type	PU	
Colour	black	499989	SK M 8	50
	black	499994	SK M 12	50
General	499989		499994	
Housing material		PA		
Colour		black		
Class of flammability according to UL 94		V0		
Surface		-		
Termination	M8 x 1		M12 x 1	
Storage temperature range		-20 – 80 °C		
Operation temperature range		-20 – 80 °C		
Dimensions (w x h x d)				
Weight (kg/piece)		0.0020		
Wire		-		

Actuator sensor interface

Designation unit for M8, M12 cables
 Designation plate, designation sleeve
 Colour: white, transparent



Dimensions




Description	Part-No.	Type	PU	
Colour	white	499988	LB M8/M12 4x23 mm	200
	white, printed	499996	LB M8/M12 4x23 mm	20
	transparent	499993	LBT M8/M12 D/2-4 mm	500
	transparent	499995	LBT M8/M12 D/4-7 mm	500
General	499988	499996	499993	499995
Housing material	Ultradur B4520		PVC	
Colour	white	white, printed	transparent	
Class of flammability according to UL 94	V2		V0	
Surface	smooth			
Termination	-			
Storage temperature range	-50 – 80 °C			
Operation temperature range	-50 – 80 °C			
Dimensions (w x h x d)	4.0 x 23.0 mm		8.0 x 23.5 x 13.0 mm	
Weight (kg/piece)	0.0050		0.0030	
Wire	-		∅ 2-4mm	∅ 4-7mm

Comments

Printing for article No. 499996 according to customer specification max. of 14 characters

10. Cable fittings, conduits and accessories

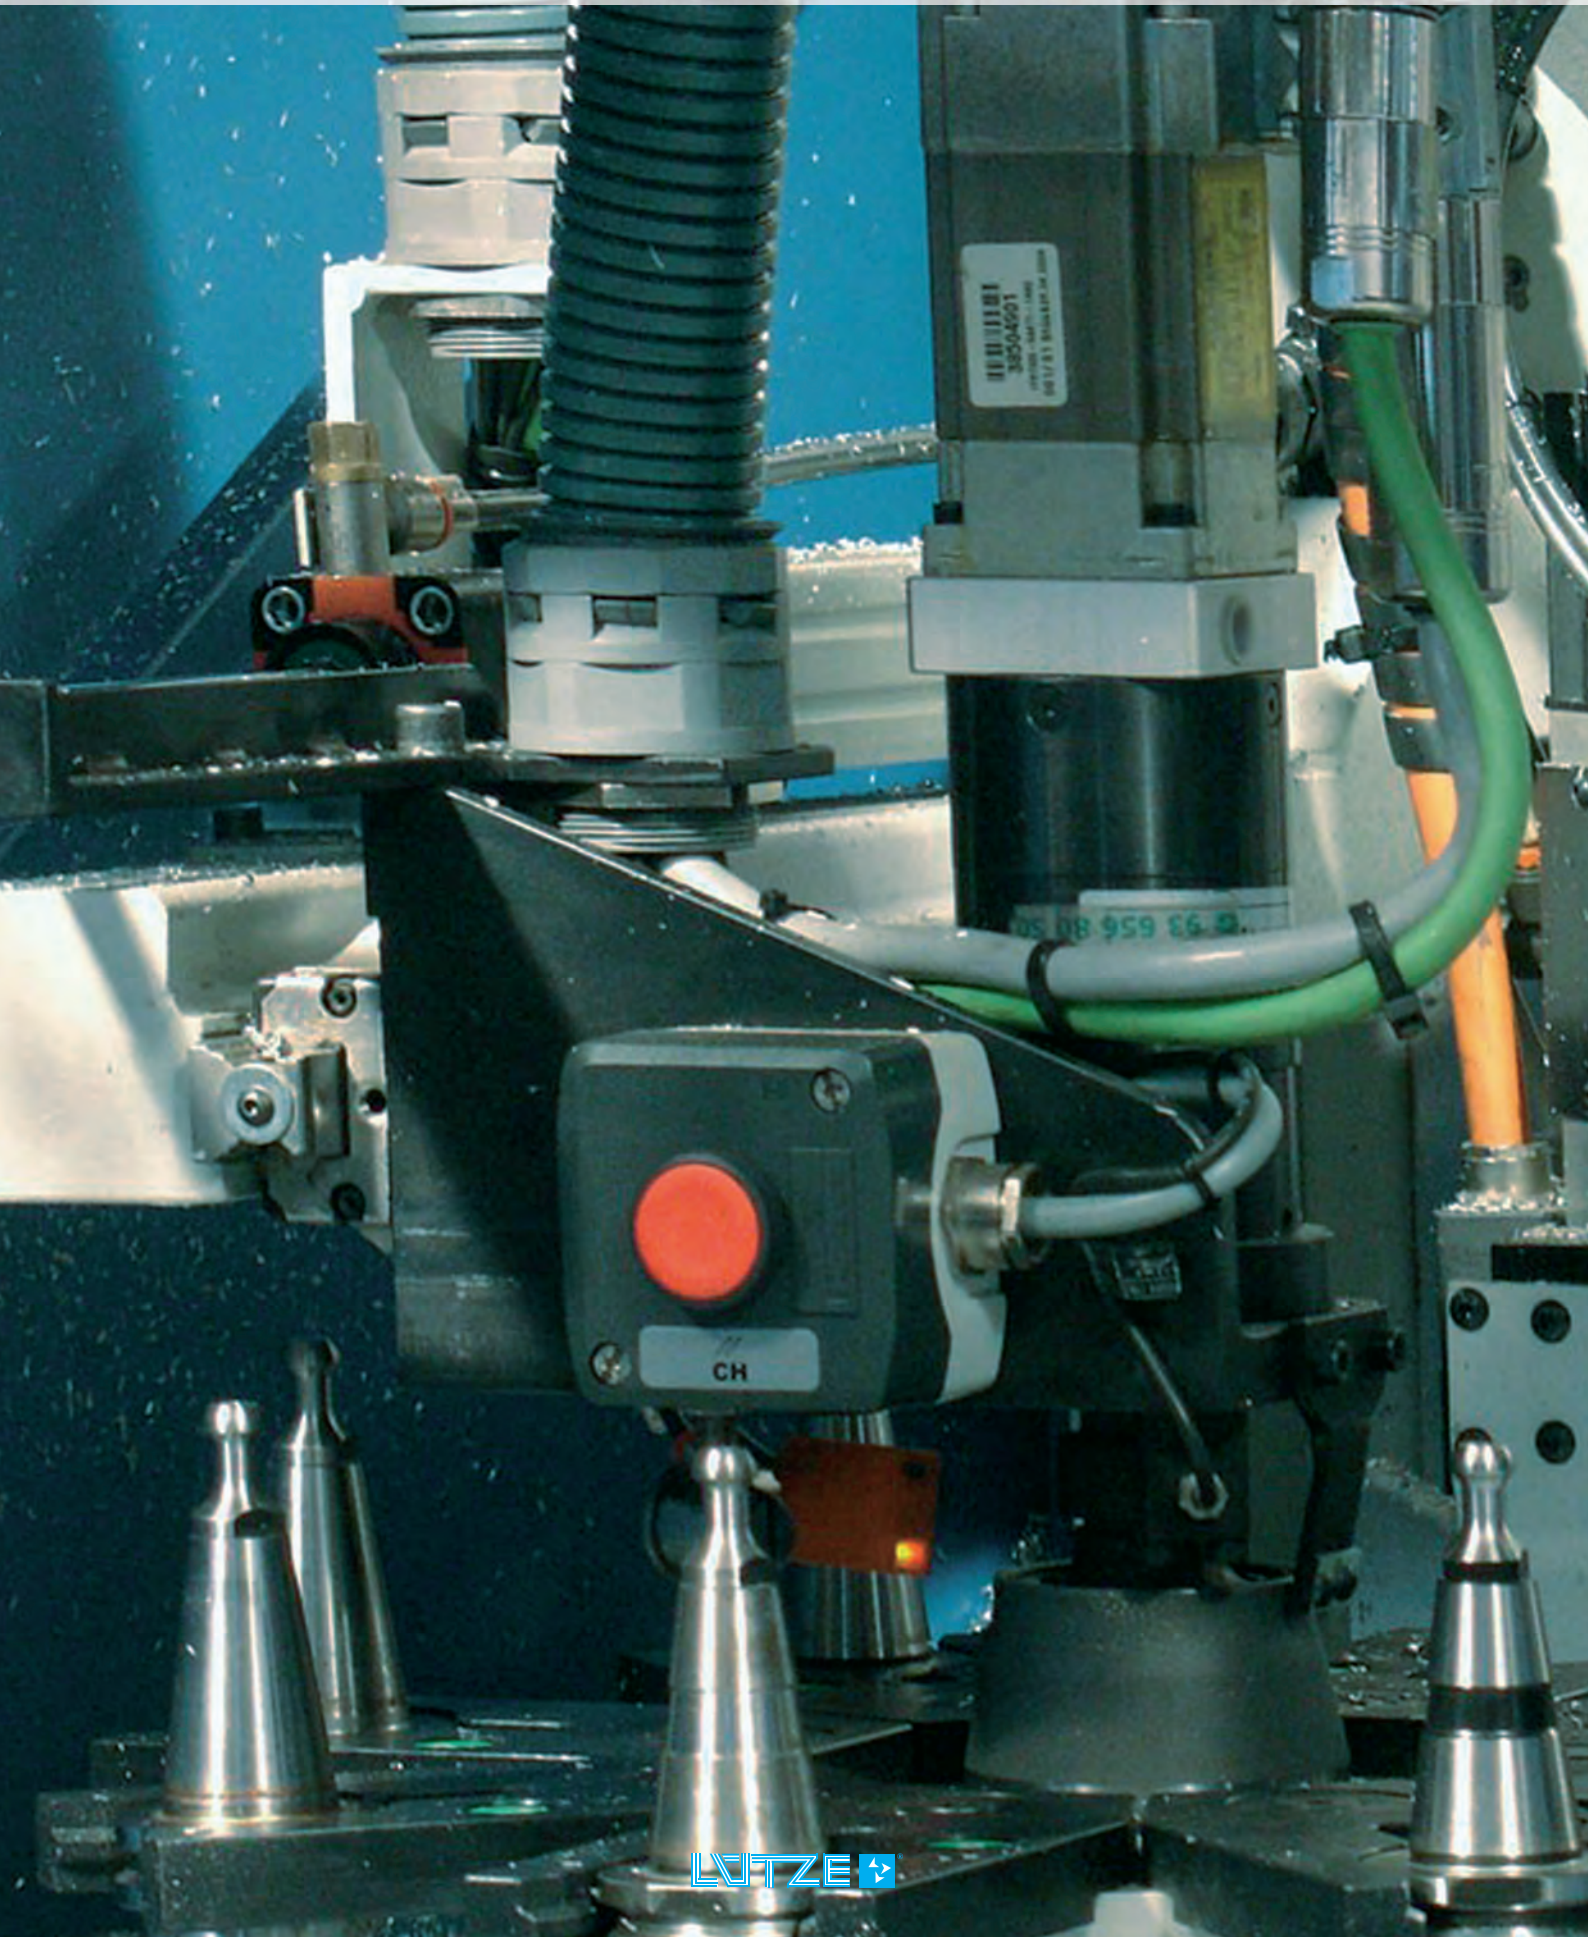

Cable conduits and conduit fittings



Cablefix



Cablefix Vario



Plastic cable fittings



Metal cable fittings

Cable glands

Product	for pre-assembled cables	Strain relief	Page
Cable fix Vario	●	●	up to 10.6
Cable fix		●	up to 10.8

Plastic cable fittings

metric	PG	grey	black	ex	Labelling protection class	Kink protection	Strain relief	Page
●		●					●	10.11
●			●				●	10.11
	●	●	●				●	10.12
●		●	●	●	●		●	10.14
●		●	●			●	●	10.15
Accessoires								
Plastic final angle								up to 10.16
Reducing rings, extensions, Blank plug								up to 10.18

Metal cable fittings

metric	PG	Shield termination	Contact strips	ex	Clamp ring	Strain relief	Page	
●	●					●	up to 10.23	
●	●	●	●			●	up to 10.25	
●				●		●	10.27	
●	●				●	●	up to 10.28	
●	●				●	●	up to 10.30	
Metal accessoires								
Metal elbow fitting								up to 10.36
Hexagonal nut, Reducing ring, extensions, blank plug, Seal inserts								up to 10.38

Cable fittings and accessories



Cable protection system Condufix

Condufix cable protection system

lightweight	standard	reinforced	robot	Conduit holder steel	Conduit holder polyamide	Page
●						10.50
	●					10.51
		●				10.52
			●			10.53
				●		10.54
					●	10.55

Cable conduit fittings Condufix-System

metric	PG	grey	black	straight	90° Angle	90° Arc angle without metal thread (MG)	90° Arc angle with metal thread/MG	45° Angle without MG	45° Angle with MG	straight, inner thread out of metal	straight, outer thread out of metal	90° Flange elbow	Y Design	T Design	straight strain relief out of metal	Page
●	●	●	●	●												up to 10.56
●	●	●	●								●					
●	●	●	●		●											10.60
●	●	●	●			●										10.61
●	●	●	●				●									10.62
●	●	●	●					●								10.63
●		●	●						●							10.64
●	●	●	●							●						10.65
●		●	●												●	10.66
		●	●									●				up to 10.67
		●	●										●			10.69
		●	●											●		10.70

Accessoires

Flat seal, O-rings, plastic accessory, metal accessory	up to 10.71
Cable conduit, Conduflex	up to 10.77
Cable conduit, Wellflex	up to 10.82
Plastic Conduit holder	up to 10.83
Metal Conduit nipples and clamps	10.84

Control panel installation

Socket	10.87
Cu grounding strap	10.88
Cable bundler	10.89
Spirflex spiral band	10.90
Cable tie	10.91
Cable marking system	up to 10.92

Cable fittings and accessories - General

Materials

Turning parts:	MS58, nickel-plated
Cast parts:	Zinc die-cast DIN 1743 (elbow fitting/flange elbow to PG 16), aluminum chill casting (flange elbow after PG 21)
Plastics:	Polystyrol or polamide 6 GF 30
Clamp rings:	Neoprene, oil and benzene resistant, temperature-resistant from – 30 °C to + 120 °C
Clamping rings:	Steel, glossy zinc plated
O-Rings:	Perbunan®, oil- and benzene-resistant

Short term DIN 7728	Chem. Term	Trade names (manufacturer)	Gross density DIN 53457 g/cm ³	Fuel DIN Benzine/ Super	Fuel DIN Diesel	Benzene	Mineral oil	Animal and plant oils	Weak Bases	Strong Bases	Weak Acids	Strong Acids	Solubility
SB	Polystyrene shock-resistant	Polystyrol C (BASF)	1.05	-	-	-	O	O	+	+	+	O	Benzene
	Styrol-Butadien	Vestyron (casing)											
	Copoly-mers	Hostyren (Hoechst)											
PA 6	Polyamide 6	Ultramid® B (BASF)	1.14	+	+	O	+	O	+	+	+	O	(concentrated formic acid)
		Durethan® B (Bayer)											
PA 6 GF 30	Polyamide 6 glass fiber reinforced	Ultramid® B (BASF)	1.35	+	+	O	+	O	+	+	+	O	(concentrated formic acid)
		Durethan® B (Bayer)											
PA	Polyamide amorph	Trogamid® amorph (Dynamite Nobel)	1.12	+	+	+	+	+	+	O	+	-	(concentrated formic acid)
Symbols stability:		+ = resistant											
		O = conditionally resistant											
		- = unstable											

Protection type

Example for the specification of a protection type	IP	5	5
	Code letter	First code number	Second code number

First code number Degrees of protection for protection against contact and foreign substances

5	Protection against harmful dust accumulation. The infiltration of dust is not completely prevented but the dust may not enter in such quantities that the functioning of the equipment is impaired (Dust-proof). Full protection against contact.
6	Protection against the infiltration of dust (dust-tight). Full protection against contact.

Second code number Degree of protection for water protection

5	Protection against a stream of water from a tube that is aimed at the equipment (enclosure) from all directions. It may not have a damaging effect (streaming water).
6	Protection against heavy sea-water or strong water stream. Water may not penetrate (flooding) in damaging amounts into the equipment (enclosure).
7	Protection against water, if the equipment (enclosure) is submerged in water for defined pressure and time conditions. Water may not penetrate in damaging amounts (submerging).
8	The equipment is suitable for continuous submersion in water for conditions that are described by the manufacturer (submersion).

Cable fittings and accessories

Cablefix Vario

Feed-through for all prefabricated cables and wires with connectors



Application

- Electrotechnology, pneumatics, hydraulics, robotics, general machine and plant construction

Properties

- Feed through and terminal frames from high-quality solid
- Aluminium or polyamide GF30 with additional inner brass reinforcement
- High flexibility in the application
- Additional mounting to existing installation easily possible
- Even pressure effect on the feed through round material yields good strain relief and sealing
- Unused holes in the module can simply sealed with blank plugs
- Compact design i.e. space-saving
- 2 module sizes with slot and suspension principle
- Very good weathering resistance
- Resistant to UV radiation, ozone, oils, fuels, acids, bases, solvents and sea water

Part-No.	Type	Termination area mm	Number of holes	Diameter mm	Length mm	Height mm	suitable for Part-No.	PU piece
Rubber module, material TPE								
606150	VK0	Solid material	0		40	20		5
606151	VK4	4–4.5	14		40	20		5
606152	VK5	4.5–5.5	8		40	20		5
606153	VK6	5.5–6.5	8		40	20		5
606154	VK7	6.5–7.5	5		40	20		5
606155	VK8	7.5–8.5	5		40	20		5
606156	VK9	8.5–9.5	3		40	20		5
606157	VK10	9.5–10.5	3		40	20		5
606158	VK12	10.5–12.5	2		40	20		5
606159	VK14	12.5–14.5	2		40	20		5
606160	VK16	14.5–16.5	2		40	20		5
606200	VG0	Solid material	0		40	40		3
606201	VG18	16.5–18.5	2		40	40		3
606202	VG20	18.5–20.5	1		40	40		3
606203	VG22	20.5–22.5	1		40	40		3
606204	VG24	22.5–24.5	1		40	40		3
606205	VG26	24.5–26.5	1		40	40		3
606206	VG28	26.5–28.5	1		40	40		3
606207	VG30	28.5–30.5	1		40	40		3
606208	VG32	30.5–32.5	1		40	40		3
606209	VG34	32.5–34.5	1		40	40		3
Matching blank plug, PA6 GF15								
606250	BL4			4	30		606151	50
606251	BL5			5	30		606152	50
606252	BL6			6	30		606153	50
606253	BL7			7	30		606154	50
606254	BL8			8	30		606155	50
606255	BL9			9	30		606156	50
606256	BL10			10	30		606157	50
606257	BL12			12	30		606158	50
606258	BL14			14	30		606159	50
606259	BL16			16	30		606160	50
606260	BL18			18	30		606201	50

Cable fittings and accessories

Cablefix Vario

Feed-through for all prefabricated cables and wires with connectors



Technical data

Temperature range	-40 °C to +135 °C
Burning behaviour	Flame-retardant
Module type	VG=40x43.5 VK=40x22.9 for cable and wire diameters from 4 mm to 34.5 mm, see ordering information
Protection class	IP 65

Design


- Frame AKLR from smooth ground aluminum
- Frame KKLR from polyamide reinforced with brass bars 6.6 GF30
- Modules slotted to the right from the borings

Part-No.	Type	Dimension (LxHxT)	Unit VK/VG	PU piece	With flat seal and drilling template	Comments
Terminal frame as feed-through system with strain relief						
606050	KKLR 1	136 x 71 x 30	4/2	3	Yes	Master gauge for holes HAN 16 B attachment housing
606051	KKLR 2	164 x 71 x 30	6/3	2	Yes	Master gauge for holes HAN 24 B attachment housing
Aluminium smooth-ground, also available as anodised						
606038	AKLR0	68 x 68 x 30	2/1	1	Yes	Hole ø 6.5 hole dimensions 30 x 55 with flat seal
606001	AKLR 1	108 x 68 x 30	4/2	1	Yes	
606002	AKLR 2	148 x 68 x 30	6/3	1	Yes	
606003	AKLR 3	148 x 88 x 30	9/3+3	1	Yes	
606004	AKLR 4	148 x 108 x 30	12/6	1	Yes	
606005	AKLR 5	188 x 78 x 30	8/4	1	Yes	
606006	AKLR 6	188 x 98 x 30	12/4+4	1	Yes	
606007	AKLR 7	188 x 118 x 30	16/8	1	Yes	
606040	AKLW 2	148 x 68 x 30	6/3	1	Yes	Master gauge for holes HAN 24 B attachment housing

Unit corresponds to the number of required rubber modules type VK or VG

Cable fittings and accessories

Cablefix Control cable flange (ST)



Application
Cablefix flanges are used to introduce cables and wires into a housing. They are used in light to medium-weight machine and plant construction.

Properties

- The Cablefix flanges can be mounted side by side using the dovetail guides. This makes it possible to implement various individual combinations of flanges to suit the specific requirements.
- The integrated strain relief closes automatically when the cables and wires are pushed through.
- An integrated formed rubber part seals off the cables and wires by means of sealing lips.
- For troubleshooting, maintenance or retrofitting, the individual cables can be easily loosened from the spring clamp using a screwdriver and replaced.
- Unused inputs can be closed off using the plugs supplied with the product.
- Resistant to fuels, mineral oils, greases, alkalis
- Halogen- and silicone-free

Technical data


Protection class	IP 55 (mounting orientation from below)
Temperature range	-30 °C to +70 °C
Burning behaviour	Flange UL 94 V2
max. metal gauge	3 mm
Breakthrough with standard sheet metal hole punch	46 x 46mm

Part-No.	Type	Dimensions (w x h x d) mm	Cut-out W x H mm	Number of cables x cable diameter	Material	PU piece
Cablefix Control cable flange (ST)						
600347	1xST	50.0 x 50.0 x 11.5	46 x 46	6 x 6.3 – 8.9	Flange: PA 6.6 Seal: TPE Plugs: PA 6 Retaining plates and screws: galvanised steel	5

Note:
50 mm must be allotted for each flange mounted side by side.

Cable fittings and accessories

Cablefix Bus flange (B/V)



Application
Cablefix flanges are used to introduce cables and wires into a housing. They are used in light to medium-weight machine and plant construction.

Properties

- The Cablefix flanges can be mounted side by side using the dovetail guides. This makes it possible to implement various individual combinations of flanges to suit the specific requirements.
- The integrated strain relief closes automatically when the cables and wires are pushed through.
- An integrated formed rubber part seals off the cables and wires by means of sealing lips.
- For troubleshooting, maintenance or retrofitting, the individual cables can be easily loosened from the spring clamp using a screwdriver and replaced.
- Unused inputs can be closed off using the plugs supplied with the product.
- Resistant to fuels, mineral oils, greases, alkalis
- Halogen- and silicone-free

Technical data

Protection class	IP 55 (mounting orientation from below)
Temperature range	-30 °C to +70 °C
Burning behaviour	Flange UL 94 V2
max. metal gauge	3 mm
Breakthrough with standard sheet metal hole punch	46 x 46mm


Part-No.	Type	Dimensions (w x h x d) mm	Cut-out W x H mm	Number of cables x cable diameter	Material	PU piece
Cablefix Bus flange (B/V)						
600320	1xB/V	50.0 x 50.0 x 11.5	46 x 46	2 x 6.1 - 8.8 + 2 x 7.8 - 10.7 mm	Flange: PA 6.6 Seal: TPE Plugs: PA 6 Retaining plates and screws: galvanised steel	5

Note:
50 mm must be allotted for each flange mounted side by side.

Cable fittings and accessories

Cablefix

Sensor/Actuator flange (S/A)



Application

Cablefix flanges are used to introduce cables and wires into a housing. They are used in light to medium-weight machine and plant construction.

Properties

- The Cablefix flanges can be mounted side by side using the dovetail guides. This makes it possible to implement various individual combinations of flanges to suit the specific requirements.
- The integrated strain relief closes automatically when the cables and wires are pushed through.
- An integrated formed rubber part seals off the cables and wires by means of sealing lips.
- For troubleshooting, maintenance or retrofitting, the individual cables can be easily loosened from the spring clamp using a screwdriver and replaced.
- Unused inputs can be closed off using the plugs supplied with the product.
- Resistant to fuels, mineral oils, greases, alkalis
- Halogen- and silicone-free

Technical data

Protection class	IP 55 (mounting orientation from below)
Temperature range	-30 °C to +70 °C
Burning behaviour	Flange UL 94 V2
max. metal gauge	3 mm
Breakthrough with standard sheet metal hole punch	46 x 46mm

Part-No.	Type	Dimensions (w x h x d) mm	Cut-out W x H mm	Number of cables x cable diameter	Material	PU piece
Cablefix Sensor/Actuator flange (S/A)						
600321	1xS/A	50.0 x 50.0 x 11.5	46 x 46	8 x 3.8 - 6.3 mm	Flange: PA 6.6 Seal: TPE Plugs: PA 6 Retaining plates and screws: galvanised steel	5

Note:

50 mm must be allotted for each flange mounted side by side.
e.g. a combination of 3 flanges results in hole dimensions of 46 mm x 46 mm plus 2 x 50 mm = 46 mm x 146 mm.

Cable fittings and accessories

Plastic fittings TOP-T-P metric



Properties


- – metric –
- Cable fitting with hexagon base
- Strain relief and seal

Technical data

Protection class IP 68 to 5 bar

Design

- Material Polyamide PA 6.6-V-2
- Colour grey RAL 7001
black RAL 9005
- Gasket Neoprene



Part-No.	Type	G	Approvals	Clamping range D mm	SW mm	L 1 mm	weight approx. kg/100 piece	PU piece
TOP-T-P metric grey RAL 7001								
600790	TOP-T-P M 12x1,5	M 12x1.5	UR	2.0 – 6.5	15	8.0	0.32	100
600680	TOP-T-P M 16x1,5	M 16x1.5	UR	4.0 – 10.0	20	8.0	0.57	100
600681	TOP-T-P M 20x1,5	M 20x1.5	UL	6.0 – 12.0	24	9.0	0.96	100
600682	TOP-T-P M 25x1,5	M 25x1.5	UL	9.0 – 16.0	28	11.0	1.55	50
600683	TOP-T-P M 32x1,5	M 32x1.5	UL	10.0 – 21.0	36	11.0	2.65	25
600791	TOP-T-P M 40x1,5	M 40x1.5	UL	16.0 – 28.0	46	11.0	4.34	10
600792	TOP-T-P M 50x1,5	M 50x1.5	UL	21.0 – 34.5	53	13.0	7.37	5
600684	TOP-T-P M 63x1,5	M 63x1.5		30.0 – 44.5	65	14.0	10.26	5
TOP-T-P metric black RAL 9005								
600840	TOP-T-P M 12x1,5	M 12x1.5	UR	2.0 – 6.5	15	8.0	0.32	100
600841	TOP-T-P M 16x1,5	M 16x1.5	UR	4.0 – 10.0	20	8.0	0.57	100
600842	TOP-T-P M 20x1,5	M 20x1.5	UL	6.0 – 12.0	24	9.0	0.96	100
600843	TOP-T-P M 25x1,5	M 25x1.5	UL	9.0 – 16.0	28	11.0	1.55	50
600844	TOP-T-P M 32x1,5	M 32x1.5	UL	10.0 – 21.0	36	11.0	2.65	25
600845	TOP-T-P M 40x1,5	M 40x1.5	UL	16.0 – 28.0	46	11.0	4.40	10
600846	TOP-T-P M 50x1,5	M 50x1.5	UL	21.0 – 34.5	53	13.0	7.37	5
600847	TOP-T-P M 63x1,5	M 63x1.5		30.0 – 44.5	65	14.0	10.26	5

Cable fittings and accessories

Plastic fittings TOP-T-P



Properties


- Cable fitting with hexagon base
- Strain relief and seal

Technical data

Protection class IP 68 to 5 bar

Design


- Material polyamide PA 6.6-V-2
- Colour grey RAL 7001
- black RAL 9005
- Gasket Neoprene



Part-No.	Type	G	Approvals	Clamping range D mm	SW mm	L 1 mm	weight approx. kg/100 piece	PU piece
TOP-T-P PG grey RAL 7001								
600660	TOP-T-P PG 7	PG 7		3.0 – 6.5	15	8.0	0.33	100
600661	TOP-T-P PG 9	PG 9		4.0 – 8.0	19	8.0	0.52	100
600662	TOP-T-P PG 11	PG 11	UR	5.0 – 10.0	22	8.0	0.87	100
600663	TOP-T-P PG 13,5	PG 13	UL	6.0 – 12.0	24	9.0	0.96	100
600664	TOP-T-P PG 16	PG 16	UL	10.0 – 14.0	27	10.0	1.37	50
600665	TOP-T-P PG 21	PG 21	UL	13.0 – 18.0	33	11.0	2.04	50
600666	TOP-T-P PG 29	PG 29	UL	18.0 – 25.0	42	11.0	3.88	25
600667	TOP-T-P PG 36	PG 36	UL	22.0 – 34.0	53	13.0	6.90	10
600668	TOP-T-P PG 42	PG 42		30.0 – 38.0	53	13.0	8.80	5
600669	TOP-T-P PG 48	PG 48		30.0 – 44.5	65	14.0	9.79	5
TOP-T-P PG black RAL 7005								
600860	TOP-T-P PG 7	PG 7		3.0 – 6.5	15	8.0	0.33	100
600861	TOP-T-P PG 9	PG 9		4.0 – 8.0	19	8.0	0.52	50
600862	TOP-T-P PG 11	PG 11	UR	5.0 – 10.0	22	8.0	0.87	100
600863	TOP-T-P PG 13,5	PG 13,5	UL	6.0 – 12.0	24	9.0	0.96	50
600864	TOP-T-P PG 16	PG 16	UL	10.0 – 14.0	27	10.0	1.37	50
600865	TOP-T-P PG 21	PG 21	UL	13.0 – 18.0	33	11.0	2.04	50
600866	TOP-T-P PG 29	PG 29	UL	18.0 – 25.0	42	11.0	3.98	25
600867	TOP-T-P PG 36	PG 36	UL	22.0 – 34.0	53	13.0	6.90	10
600868	TOP-T-P PG 42	PG 42		30.0 – 38.0	60	13.0	8.80	5
600869	TOP-T-P PG 48	PG 48		30.0 – 44.5	65	14.0	9.79	5

Cable fittings and accessories

Plastic fitting TOP-TR-P



Properties

- Cable fitting with hexagon base
- Strain relief and gasket
- Reduced sealing insert

Technical data

Protection class IP 68 to 5 bar
 Approvals on request


Design

- Material Polyamide PA 6-V-2
- Colour grey RAL 7001
 other colours upon request
- Gasket NBR

Part-No.	Type	G	Approvals	Clamping range D mm	SW mm	L 1 mm	weight approx. kg/100 piece	PU piece
TOP-TR-P metric								
600690	TOP-TR-P M 16x1,5	M 16x1,5	on request	2.0 – 7.0	20	8.0	0.62	100
600691	TOP-TR-P M 20x1,5	M 20x1,5	on request	4.0 – 10.0	24	8.0	1.34	100
600692	TOP-TR-P M 25x1,5	M 25x1,5	on request	5.0 – 14.0	29	8.0	1.63	50
600693	TOP-TR-P M 32x1,5	M 32x1,5	on request	8.0 – 18.0	36	10.0	2.72	25
600991	TOP-TR-P M 63x1,5	M 20x1,5	on request	4.0 – 10.0	24	8.0	1.34	100
TOP-T-R PG								
600670	TOP-TR-P PG 7	PG 7	on request	2.0 – 5.0	15	8.0	0.70	100
600671	TOP-TR-P PG 9	PG 9	on request	2.0 – 6.0	19	8.0	1.10	100
600672	TOP-TR-P PG 11	PG 11	on request	3.0 – 7.0	22	8.0	1.40	100
600673	TOP-TR-P PG 13,5	PG 13,5	on request	5.0 – 9.0	24	9.0	1.80	100
600674	TOP-TR-P PG 16	PG 16	on request	7.0 – 12.0	27	10.0	1.75	50
600675	TOP-TR-P PG 21	PG 21	on request	9.0 – 16.0	33	11.0	3.05	50
600676	TOP-TR-P PG 29	PB 29	on request	12.0 – 20.0	42	11.0	4.10	25
600677	TOP-TR-P PG 36	PG 36	on request	20.0 – 26.0	53	13.0	7.30	10
600678	TOP-TR-P PG 42	PG 42	on request	25.0 – 31.0	60	14.0	11.10	5
600679	TOP-TR-P PG 48	PG 48	on request	29.0 – 35.0	65	14.0	11.60	5

Cable fittings and accessories

Plastic fitting TOP-K Ex metric



Properties

- Ex cable fitting with hexagon base
- Strain relief, gasket and O-Ring
- For explosion risk areas
- Installation-friendly
- Suitable for the fixed running of cables
- (Ignition) Protection class: Ex e - increased safety
- (Ignition) Protection class: Ex tD A21 - housing protection
- Category / Zone: 2G and 2D / 1, 2, 21, 22

Technical data

Protection class IP 66

Design

- Material Polyamide for explosion risk areas according to EN 50014
- Colour blue/black RAL 5015/RAL 9005; black/black RAL 9005
- Gasket Neoprene
- O-ring (OR) Perbunan®

Part-No.	Type	G	Clamping range D mm	SW mm	L 1 mm	weight approx. kg/100 piece	PU piece
TOP-K Ex metric cap nut, colour blue, suitable for labelling for protection class							
600720	TOP-K Ex M 12 × 1,5	M 12×1.5	4.0 – 7.0	15	8.0	0.33	100
600721	TOP-K Ex M 16 × 1,5	M 16×1.5	5.5 – 10.0	20	8.0	0.64	100
600722	TOP-K Ex M 20 × 1,5	M 20×1.5	5.5 – 13.0	24	8.0	0.92	100
600723	TOP-K Ex M 25 × 1,5	M 25×1.5	8.0 – 17.0	29	8.0	1.56	50
600724	TOP-K Ex M 32 × 1,5	M 32×1.5	12.0 – 21.0	36	10.0	2.56	25
600725	TOP-K Ex M 40 × 1,5	M 40×1.5	17.0 – 28.0	46	10.0	4.40	10
600726	TOP-K Ex M 50 × 1,5	M 50×1.5	22.0 – 35.0	55	12.0	6.80	5
600727	TOP-K Ex M 63 × 1,5	M 63×1.5	27.0 – 48.0	68	12.0	9.60	5
TOP-K Ex metric cap nut, colour black							
601720	TOP-K Ex M 12 × 1,5	M 12×1.5	4.0 – 7.0	15	8.0	0.33	100
601721	TOP-K Ex M 16 × 1,5	M 16×1.5	5.5 – 10.0	20	8.0	0.64	100
601722	TOP-K Ex M 20 × 1,5	M 20×1.5	5.5 – 13.0	24	8.0	0.92	100
601723	TOP-K Ex M 25 × 1,5	M 25×1.5	8.0 – 17.0	29	8.0	1.56	50
601724	TOP-K Ex M 32 × 1,5	M 32×1.5	12.0 – 21.0	36	10.0	2.56	25
601725	TOP-K Ex M 40 × 1,5	M 40×1.5	17.0 – 28.0	46	10.0	4.40	10
601726	TOP-K Ex M 50 × 1,5	M 50×1.5	22.0 – 35.0	55	12.0	6.80	5
601727	TOP-K Ex M 63 × 1,5	M 63×1.5	27.0 – 48.0	68	12.0	9.60	5

Cable fittings and accessories

Plastic fitting TOP-T-KS metric



Properties


- – metric –
- Cable fitting with hexagon base
- Kink protection spiral
- Strain relief and seal

Technical data

Protection class IP 68 to 5 bar

Design

- Material Polyamide 6-V-2
- Colour grey RAL 7035
black RAL 9005
other colour upon request
- Gasket CR / NBR



Part-No.	Type	G	Clamping range D mm	SW mm	L 1 mm	weight approx. kg/100 piece	PU piece
TOP-T-KS metric grey RAL 7035							
600900	TOP-T-KS M 12x1,5	M 12x1.5	3.0 – 6.5	15	8.0	0.50	100
600901	TOP-T-KS M 16x1,5	M 16x1.5	5.0 – 10.0	22	15.0	1.30	100
600902	TOP-T-KS M 20x1,5	M 20x1.5	10.0 – 14.0	27	15.0	2.30	50
600903	TOP-T-KS M 25x1,5	M 25x1.5	13.0 – 18.0	33	15.0	4.10	50
TOP-T-KS metric black RAL 9005							
600905	TOP-T-KS M 12x1,5	M 12x1.5	3.0 – 6.5	15	8.0	0.50	100
600906	TOP-T-KS M 16x1,5	M 16x1.5	5.0 – 10.0	22	15.0	1.30	100
600907	TOP-T-KS M 20x1,5	M 20x1.5	10.0 – 14.0	27	15.0	2.30	50
600908	TOP-T-KS M 25x1,5	M 25x1.5	13.0 – 18.0	33	15.0	4.10	50

Cable fittings and accessories

Plastic elbow fitting AW-P




Properties

- Elbow fitting

Design


- Material Polyamide 6 GF 30
- Colour grey

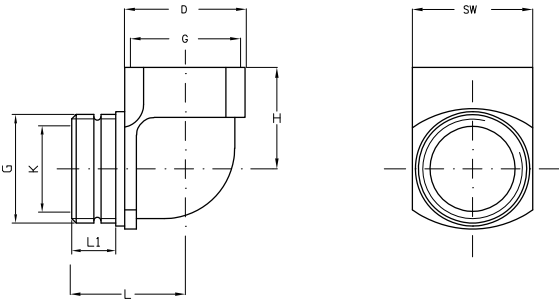

Part-No.	Type	G	D mm	K mm	SW mm	L mm	L 1 mm	H mm	weight ap- prox. kg/100 pie- ce	PU piece
AW-P metric										
601071	AW-P M 16	M 16x1.5	19.0	11.0	19	24.0	13.0	21.0	0.83	1
601072	AW-P M 20	M 20x1.5	25.0	15.0	25	29.0	15.0	24.0	1.48	1
601073	AW-P M 25	M 25x1.5	30.0	20.0	30	33.0	16.0	28.0	2.25	1
601074	AW-P M 32	M 32x1.5	36.0	26.0	36	38.0	17.0	31.0	3.32	1

Cable fittings and accessories

Plastic elbow fitting AWK-P

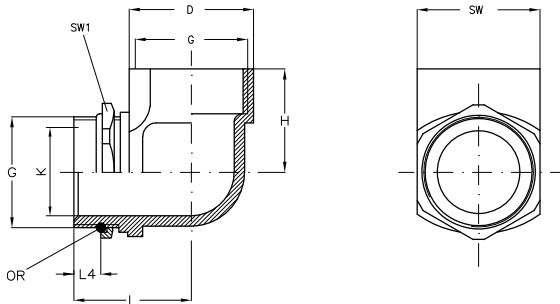

Properties

- Elbow fitting with O-Ring seal and additional locking nut
- Direction of reduction continuously adjustable

Technical data

Protection class IP 65



Design

- Material Polyamide 6 GF 30
- Colour grey
- O-ring (OR) Neoprene
- Locking nut Polyamide 6 GF 30

Part-No.	Type	G	D mm	K mm	SW mm	SW 1 = ac- ross flats mm	L mm	L 4 mm	H mm	weight ap- prox. kg/100 pie- ce	PU piece
AWK-P metric											
601091	AWK-P M 16	M 16x1.5	19.0	10.0	19	21	23.0	7	21.0	0.96	1
601092	AWK-P M 20	M 20x1.5	22.0	13.0	22	27	25.0	8	21.5	1.67	1
601093	AWK-P M 25	M 25x1.5	24.0	14.0	24	30	27.0	7	24.0	2.31	1
601094	AWK-P M 32	M 32x1.5	27.0	17.0	27	32	29.5	8	25.0	1.72	1

Cable fittings and accessories

Plastic accessory RR Form 1, metric

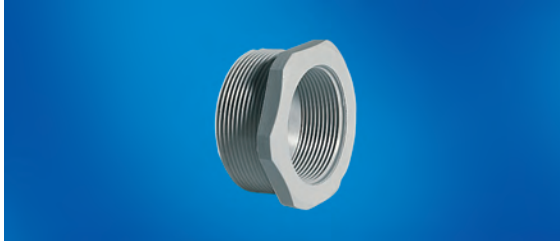

Properties

- - metric -
- - **Form 1** -
- Reducing ring from plastic with large outer thread and small inner thread



Design

- Material Polyamide PA 6 GF 30
- Colour Grey RAL 7035
- other colours upon request

Part-No.	Type	G	G1	SW mm	L mm	L 1 mm	weight approx. kg/100 piece	PU piece
RR-PA metric								
600550	RR-PA M 20/M 12	M 20x1.5	M 12x1.5	24	12.0	8.0	0.39	100
600551	RR-PA M 20/M 16	M 20x1.5	M 16x1.5	24	12.0	8.0	0.26	100
600552	RR-PA M 25/M 12	M 25x1.5	M 12x1.5	32	14.0	8.0	0.70	100
600553	RR-PA M 25/M 16	M 25x1.5	M 16x1.5	32	14.0	8.0	0.67	100
600554	RR-PA M 25/M 20	M 25x1.5	M 20x1.5	32	14.0	8.0	0.50	50
600555	RR-PA M 32/M 12	M 32x1.5	M 12x1.5	36	16.0	10.0	1.06	50
600556	RR-PA M 32/M 16	M 32x1.5	M 16x1.5	36	16.0	10.0	1.06	50
600557	RR-PA M 32/M 20	M 32x1.5	M 20x1.5	36	16.0	10.0	1.20	50
600558	RR-PA M 32/M 25	M 32x1.5	M 25x1.5	36	16.0	10.0	0.88	50
600559	RR-PA M 40/M 16	M 40x1.5	M 16x1.5	46	16.0	10.0	1.59	50
600560	RR-PA M 40/M 20	M 40x1.5	M 20x1.5	46	16.0	10.0	1.68	50
600561	RR-PA M 40/M 25	M 40x1.5	M 25x1.5	46	16.0	10.0	1.36	50
600562	RR-PA M 40/M 32	M 40x1.5	M 32x1.5	46	16.0	10.0	1.35	50
600563	RR-PA M 50/M 20	M 50x1.5	M 20x1.5	55	18.0	12.0	2.15	25
600564	RR-PA M 50/M 25	M 50x1.5	M 25x1.5	55	18.0	12.0	2.16	25
600565	RR-PA M 50/M 32	M 50x1.5	M 32x1.5	55	18.0	12.0	2.06	25
600566	RR-PA M 50/M 40	M 50x1.5	M 40x1.5	55	18.0	12.0	1.97	25
600567	RR-PA M 63/M 25	M 63x1.5	M 25x1.5	68	18.0	12.0	2.65	25
600568	RR-PA M 63/M 32	M 63x1.5	M 32x1.5	68	18.0	12.0	2.95	25
600569	RR-PA M 63/M 40	M 63x1.5	M 40x1.5	68	18.0	12.0	3.08	25
600570	RR-PA M 63/M 50	M 63x1.5	M 50x1.5	68	18.0	12.0	3.05	25

Cable fittings and accessories

Plastic accessories RR Form 1 PG

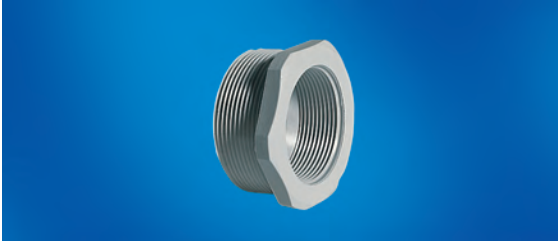

Properties

- - Form 1 -
- Reducing ring from plastic with large outer thread and small inner thread

Design

- Material PolyamidePA 6 GF 30
- Colour grey RAL 7035
other colours upon request

Part-No.	Type	G	G1	SW mm	L mm	L 1 mm	weight approx. kg/100 piece	PU piece
RR-PA PG Form 1								
600607	RR-PA PG 13,5/9	PG 13.5	PG 9	24	9.0	6.0	0.60	100
600604	RR-PA PG 21/16	PG 21	PG 16	32	16.0	11.0	0.99	100
600605	RR-PA PG 29/21	PG 29	PG 21	39	18.0	12.0	1.11	50
600606	RR-PA PG 36/29	PG 36	PG 29	50	24.0	18.0	2.50	50

Cable fittings and accessories

Plastic accessories RR Form 2




Properties

- - Form 2 -
- Reducing ring from plastic with large outer thread and small inner thread

Design

- Material PolyamidePA 6 GF 30
- Colour grey RAL 7035
- other colours upon request

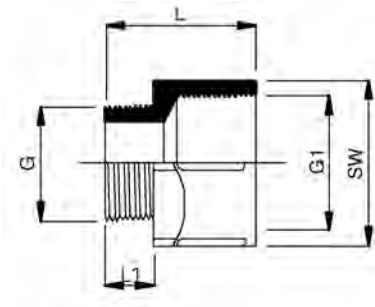


Part-No.	Type	G	G1	SW mm	L mm	L 1 mm	d1 mm	weight ap- prox. kg/100 piece	PU piece
RR-PA PG Form 2									
600600	RR-PA PG 9/7	PG 9	PG 7	19	20.5	8.0	10.0	0.36	100
600601	RR-PA PG 11/9	PG 11	PG 9	22	22.5	8.0	12.5	0.55	100
600602	RR-PA PG 13/11	PG 13.5	11	24	24.0	9.0	15.0	0.60	100
600603	RR-PA PG 16/13	PG 16	PG 13.5	27	27.0	10.0	16.0	0.83	100

d1 = smallest internal diameter

Cable fittings and accessories

Plastic accessory EW

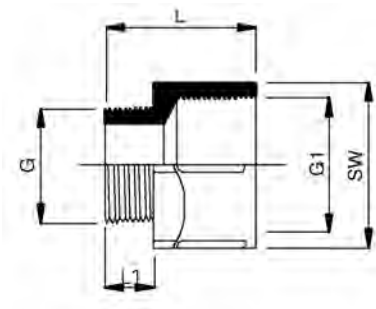

Properties

- Plastic extension, from polyamide, fibre glass reinforced with small outer thread and large inner thread.

Design

- Material PolyamidePA 6 GF 30
- Colour grey RAL 7035
other colours upon request

Part-No.	Type	G	G1	SW mm	L mm	L 1 mm	d1 mm	weight ap- prox. kg/100 piece	PU piece
EW-PA PG									
600351	EW-PA PG 7/9	PG 7	PG 9	19	20.5	8.0	8.5	0.27	100
600352	EW-PA PG 9/11	PG 9	PG 11	22	22.5	8.0	10.0	0.43	100
600353	EW-PA PG 11/13,5	PG 11	PG 13.5	24	24.0	8.0	12.5	0.54	100
600354	EW-PA PG 11/16	PG 11	PG 16	26	24.0	8.0	12.5	0.62	100
600355	EW-PA PG 13,5/16	PG 13.5	PG 16	27	27.0	9.0	15.0	0.68	100
600356	EW-PA PG 16/21	PG 16	PG 21	33	29.0	9.0	16.0	1.12	100
600357	EW-PA PG 21/29	PG 21	PG 29	43	33.0	10.0	22.5	1.43	50
600358	EW-PA PG 29/36	PG 29	PG 36	50	38.0	10.0	30.5	3.42	25
600359	EW-PA PG 36/42	PG 36	PG 42	60	40.0	12.5	39.5	3.68	10
600360	EW-PA PG 42/48	PG 42	PG 48	65	42.0	13.0	45.5	4.04	10

d1 = smallest internal diameter

Cable fittings and accessories

Plastic accessory BL




Properties

- Blank plug according to DIN 46320

Design


- Material Polyamide PA 6 or polystyrene SB
- Colour grey RAL 7035
- other colours upon request



Part-No.	Type	G	L mm	L 1 mm	weight approx. kg/100 piece	PU piece
BL metric PA						
600870	BL M 12	M 12x1.5	8.0	6.0	0.05	100
600871	BL M 16	M 16x1.5	9.0	6.0	0.09	100
600872	BL M 20	M 20x1.5	9.0	6.0	0.19	100
600873	BL M 25	M 25x1.5	10.5	7.0	0.20	100
600874	BL M 32	M 32x1.5	12.0	8.0	0.48	100
600875	BL M 40	M 40x1.5	13.0	9.0	0.66	50
600876	BL M 50	M 50x1.5	14.0	10.0	1.57	25
600877	BL M 63	M 63x1.5	17.0	12.0	2.26	25
BL PG PA						
601490	BL PG 7	PG 7	8.0	6.0	0.07	100
601491	BL PG 9	PG 9	9.0	6.0	0.13	100
601492	BL PG 11	PG 11	9.0	6.0	0.16	100
601493	BL PG 13,5	PG 13.5	9.5	6.0	0.20	100
601494	BL PG 16	PG 16	9.5	6.0	0.25	100
601495	BL PG 21	PG 21	11.0	8.0	0.38	100
601496	BL PG 29	PG 29	12.0	8.0	0.72	50
601497	BL PG 36	PG 36	15.0	10.0	1.15	25
BL PG SB						
600490	BL PG 7	PG 7	8.0	6.0	0.06	100
600491	BL PG 9	PG 9	9.0	6.0	0.12	100
600492	BL PG 11	PG 11	9.0	6.0	0.14	100
600493	BL PG 13,5	PG 13.5	9.5	6.0	0.19	100
600494	BL PG 16	PG 16	9.5	6.0	0.20	100
600495	BL PG 21	PG 21	11.0	8.0	0.34	100
600496	BL PG 29	PG 29	12.0	8.0	0.58	50
600497	BL PG 36	PG 36	15.0	10.0	1.15	25

Cable fittings and accessories

Metal fitting TOP-T



Properties

- Cable fitting with hexagon base
- Strain relief
- Gasket and O-Ring

Technical data

Protection class IP 68 to 5 bar


Design

- Material Brass nickel-plated
- Gasket Neoprene
- O-ring (OR) Perbunan®

Part-No.	Type	G	Clamping range D mm	SW 1 = across flats mm	SW 2 = across flats mm	L 1 mm	L mm	weight approx. kg/100 piece	PU piece
TOP-T metric									
600701	TOP-T M 12x1,5	M 12x1,5	3.0 – 6.5	14	14	6.0	27.5	1.12	50
600760	TOP-T M 16x1,5	M 16x1,5	4.0 – 8.0	17	18	7.0	30.0	1.46	50
600761	TOP-T M 20x1,5	M 20x1,5	6.0 – 12.0	22	22	8.0	32.3	2.63	50
600762	TOP-T M 25x1,5	M 25x1,5	10.0 – 14.0	24	27	8.0	35.6	5.43	25
600763	TOP-T M 32x1,5	M 32x1,5	13.0 – 18.0	30	34	9.0	40.2	7.12	25
600702	TOP-T M 40x1,5	M 40x1,5	18.0 – 25.0	40	43	9.0	47.5	15.90	20
600703	TOP-T M 50x1,5	M 50x1,5	22.0 – 32.0	50	55	9.0	56.3	27.21	15
600704	TOP-T M 63x1,5	M 63x1,5	34.0 – 44.0	64	68	14.0	64.3	31.78	12
TOP-T PG									
600710	TOP-T PG 7	PG 7	3.0 – 6.5	14	14	6.0	27.8	1.13	50
600711	TOP-T PG 9	PG 9	4.0 – 8.0	17	17	6.0	28.6	1.51	50
600712	TOP-T PG 11	PG 11	5.0 – 10.0	20	20	6.0	31.3	3.12	50
600713	TOP-T PG 13,5	PG 13,5	6.0 – 12.0	22	22	6.5	30.6	2.86	50
600714	TOP-T PG 16	PG 16	10.0 – 14.0	24	24	6.5	34.0	3.34	25
600715	TOP-T PG 21	PG 21	13.0 – 18.0	30	30	7.2	38.4	6.40	25
600716	TOP-T PG 29	PG 29	18.0 – 25.0	40	40	8.0	47.3	11.20	20
600717	TOP-T PG 36	PG 36	22.0 – 32.0	50	50	9.0	56.2	18.82	15
600718	TOP-T PG 42	PG 42	30.0 – 38.0	58	58	12.0	59.7	31.58	12
600719	TOP-T PG 48	PG 48	34.0 – 44.0	64	64	14.0	66.0	37.00	12

Cable fittings and accessories

Metal fitting TOP-TR



Properties

- Cable fitting with hexagon base
- Strain relief
- Gasket and O-Ring
- With reduced sealing insert

Technical data

Protection class IP 68 to 5 bar


Design

- Material Brass nickel-plated
- Gasket Neoprene
- O-ring (OR) Perbunan®

Part-No.	Type	G	Clamping range D mm	SW 1 = across flats mm	SW 2 = across flats mm	L 1 mm	L mm	weight approx. kg/100 piece	PU piece
TOP-TR metric									
600705	TOP-TR M 12x1,5	M 12x1.5	2.0 – 5.0	14	14	6.0	27.5	1.07	50
600780	TOP-TR M 16x1,5	M 16x1.5	2.0 – 7.0	17	18	7.0	30.0	1.50	50
600781	TOP-TR M 20x1,5	M 20x1.5	3.0 – 9.0	22	22	8.0	32.3	2.73	50
600782	TOP-TR M 25x1,5	M 25x1.5	8.0 – 14.0	24	27	8.0	35.6	5.55	25
600783	TOP-TR M 32x1,5	M 32x1.5	12.0 – 18.0	30	34	9.0	40.2	7.40	25
600706	TOP-TR M 40x1,5	M 40x1.5	16.0 – 25.0	40	43	9.0	47.5	16.72	20
600707	TOP-TR M 50x1,5	M 50x1.5	23.0 – 31.0	50	55	9.0	56.3	27.95	15
600708	TOP-TR M 63x1,5	M 63x1.5	25.0 – 35.0	64	68	14.0	64.3	34.48	12
TOP-TR PG									
600730	TOP-TR PG 7	PG 7	2.0 – 5.0	14	14	6.0	27.8	1.15	50
600731	TOP-TR PG 9	PG 9	2.0 – 6.0	17	17	6.0	28.6	1.53	50
600732	TOP-TR PG 11	PG 11	2.0 – 7.0	20	20	6.0	31.3	3.20	50
600733	TOP-TR PG 13,5	PG 13.5	3.0 – 9.0	22	22	6.5	30.6	2.94	50
600734	TOP-TR PG 16	PG 16	8.0 – 12.0	24	24	6.5	34.0	3.42	25
600735	TOP-TR PG 21	PG 21	11.0 – 16.0	30	30	7.2	38.4	6.45	25
600736	TOP-TR PG 29	PG 29	13.0 – 20.0	40	40	8.0	47.3	11.50	20
600737	TOP-TR PG 36	PG 36	16.0 – 26.0	50	50	9.0	56.2	20.42	15
600738	TOP-TR PG 42	PG 42	23.0 – 31.0	58	58	12.0	59.7	32.38	12
600739	TOP-TR PG 48	PG 48	25.0 – 35.0	64	64	14.0	66.0	37.50	12

Cable fittings and accessories

Metal fitting with shield termination TOP-T-S-EMV1



Properties

- Cable fitting with hexagon base
- Strain relief
- Gasket
- O-Ring and EMC compliant shield termination
- Simple installation - the shield braiding with plastic insert is pressed against fitting base

Technical data

Protection class IP 68 to 5 bar


Design

- Material Brass nickel-plated
- Gasket Neoprene
- O-ring (OR) Perbunan®

Part-No.	Type	G	Clamping range D mm	SW mm	L 1 mm	d mm	weight approx. kg/100 piece	PU piece
TOP-T-S-EMV1 metric								
600170	TOP-T-S-EMV1 M 12x1,5	M 12x1.5	3.0 – 6.5	14	5.0	5.2	1.21	100
600171	TOP-T-S-EMV1 M 16x1,5	M 16x1.5	5.5 – 10.0	17	5.5	8.2	1.67	100
600172	TOP-T-S-EMV1 M 20x1,5	M 20x1.5	8.0 – 13.0	22	6.0	11.5	2.88	100
600173	TOP-T-S-EMV1 M 25x1,5	M 25x1.5	11.0 – 18.0	30	7.0	15.2	6.03	25
600174	TOP-T-S-EMV1 M 32x1,5	M 32x1.5	15.0 – 21.0	34	8.0	18.0	7.86	25
600175	TOP-T-S-EMV1 M 40x1,5	M 40x1.5	19.0 – 27.0	44	8.0	23.0	17.57	10
600176	TOP-T-S-EMV1 M 50x1,5	M 50x1.5	26.0 – 35.0	55	9.0	31.0	28.82	5
600177	TOP-T-S-EMV1 M 63x1,5	M 63x1.5	39.0 – 48.0	66	10.0	31.0	35.88	5
TOP-T-S-EMV1 PG								
600520	TOP-T-S-EMV1 PG 7	PG 7	3.0 – 6.5	14	5.0	5.0	1.20	100
600521	TOP-T-S-EMV1 PG 9	PG 9	5.5 – 10.0	17	6.0	7.5	1.70	100
600522	TOP-T-S-EMV1 PG 11	PG 11	5.5 – 10.0	20	6.0	9.5	3.37	50
600523	TOP-T-S-EMV1 PG 13,5	PG 13.5	8.0 – 13.0	22	6.5	11.5	3.52	50
600524	TOP-T-S-EMV1 PG 16	PG 16	8.0 – 14.0	24	6.5	12.0	3.64	50
600525	TOP-T-S-EMV1 PG 21	PG 21	11.0 – 18.0	30	7.0	17.5	7.10	25
600526	TOP-T-S-EMV1 PG 29	PG 29	19.0 – 27.0	40	8.0	25.0	12.20	25
600527	TOP-T-S-EMV1 PG 36	PG 36	24.0 – 32.0	50	9.0	31.5	15.10	10
600528	TOP-T-S-EMV1 PG 42	PG 42	30.0 – 38.0	57	10.0	37.5	21.10	5
600529	TOP-T-S-EMV1 PG 48	PG 48	34.0 – 44.0	64	10.0	43.5	30.00	5

Cable fittings and accessories

Metal fitting with shield termination TOP-T-S-EMV2



Properties

- Cable fitting with hexagon base
- Strain relief
- Gasket
- O-Ring and EMC compliant shield termination
- Simple mounting, where by 4 contact strips are used to connect the braided shield to the fitting enclosure

Technical data

Protection class IP 68 to 5 bar


Design

- Material Brass nickel-plated
- Gasket Neoprene
- O-ring (OR) Perbunan®

Part-No.	Type	G	Clamping range D mm	SW 1 = across flats mm	SW 2 = across flats mm	L 1 mm	L mm	d mm	weight approx. kg/100 piece	PU piece
TOP-T-S-EMV2 metric										
600370	TOP-T-S-EMV2 M 12x1,5	M 12x1.5	3.0 – 6.5	14	14	6.0	27.5	6.5	1.21	50
600371	TOP-T-S-EMV2 M 16x1,5	M 16x1.5	4.0 – 8.0	17	18	7.0	30.0	8.0	1.67	50
600372	TOP-T-S-EMV2 M 20x1,5	M 20x1.5	6.0 – 12.0	22	22	8.0	32.3	12.0	2.88	50
600373	TOP-T-S-EMV2 M 25x1,5	M 25x1.5	10.0 – 14.0	24	27	8.0	35.6	14.0	6.03	25
600374	TOP-T-S-EMV2 M 32x1,5	M 32x1.5	13.0 – 18.0	30	34	9.0	40.2	18.0	7.86	25
600375	TOP-T-S-EMV2 M 40x1,5	M 40x1.5	18.0 – 25.0	40	43	9.0	47.5	25.0	17.57	20
600376	TOP-T-S-EMV2 M 50x1,5	M 50x1.5	22.0 – 32.0	50	55	9.0	56.3	32.0	28.82	15
600377	TOP-T-S-EMV2 M 63x1,5	M 63x1.5	34.0 – 44.0	64	68	14.0	64.3	44.0	35.88	12

Cable fittings and accessories

Metal fittings TOP-M EExe



Application

- For explosion risk areas

Properties

- Ex cable fitting with hexagon base
- Strain relief and gasket

Technical data

Protection class IP 68 to 5 bar


Design

- Material Brass nickle-plated for explosion risk areas according to EN 50014
- Gasket Neoprene
- O-ring (OR) Perbunan®

Part-No.	Type	G	Clamping range D mm	SW mm	L 1 mm	weight approx. kg/100 piece	PU piece
TOP-M EExe metric							
600920	TOP-M EExe M 12 x 1,5	M 12x1.5	3.0 – 6.5	14	5.0	1.20	100
600921	TOP-M EExe M 16 x 1,5	M 16x1.5	5.0 – 9.0	17	5.0	1.64	100
600922	TOP-M EExe M 20 x 1,5	M 20x1.5	6.0 – 12.0	22	6.0	3.14	100
600923	TOP-M EExe M 25 x 1,5	M 25x1.5	11.0 – 16.0	27	7.0	4.26	50
600924	TOP-M EExe M 32 x 1,5	M 32x1.5	14.0 – 21.0	34	8.0	7.16	25
600925	TOP-M EExe M 40 x 1,5	M 40x1.5	19.0 – 27.0	43	8.0	12.24	10
600926	TOP-M EExe M 50 x 1,5	M 50x1.5	24.0 – 35.0	55	9.0	22.70	5
600927	TOP-M EExe M 63 x 1,5	M 63x1.5	32.0 – 42.0	65	5.0	31.50	5

Cable fittings and accessories

Metal fittings WD



Properties

- **Compact design**
- Compact fitting with hexagon base
- Strain relief
- Clamp ring and O-Ring

Technical data

Protection class IP 68

Design

- Material Brass nickel-plated
- Clamp ring (ER) Neoprene
- O-ring (OR) Perbunan®
- Low profile

Part-No.	Type	G	Clamping range D mm	SW mm	L mm	L 1 mm	weight approx. kg/100 piece	PU piece
WD metric								
601050	WD M 12x1,5	M 12x1.5	3.5 – 6.0	17	20.0	6.0	1.50	100
601051	WD M 16x1,5	M 16x1.5	5.0 – 9.0	21	20.0	6.0	2.21	100
601052	WD M 20x1,5	M 20x1.5	9.0 – 13.0	24	26.0	6.5	3.40	100
601053	WD M 25x1,5	M 25x1.5	13.0 – 17.0	32	33.0	8.0	7.20	50
601054	WD M 32x1,5	M 32x1.5	16.0 – 23.0	40	38.0	8.0	12.80	25
WD PG								
600100	WD PG 7	PG 7	4.0 – 6.0	17	20.0	6.0	1.48	100
600101	WD PG 9	PG 9	6.0 – 9.0	17	20.0	6.0	1.52	100
600102	WD PG 11	PG 11	7.0 – 12.0	21	23.0	6.5	2.32	100
600103	WD PG 13,5	PG 13.5	8.0 – 13.0	24	24.0	6.5	2.98	100
600104	WD PG 16	PG 16	10.0 – 15.0	24	26.0	6.5	3.36	100
600105	WD PG 21	PG 21	12.0 – 19.0	32	33.0	8.0	7.90	50
600106	WD PG 29	PG 29	16.0 – 27.0	40	38.0	8.0	12.28	25

Cable fittings and accessories

Metal fitting 6KM



Properties


- Fitting according to DIN 46320 with hexagon base and clamp ring.

Technical data

Protection class IP 55

Design


- Material Brass nickel-plated
- Clamp ring (ER) Neoprene



Part-No.	Type	G	Clamping range D mm	SW 1 = across flats mm	SW 2 = across flats mm	L mm	L 1 mm	weight approx. kg/100 piece	PU piece
6KM metric									
601080	6KM M 12x1,5	M 12x1.5	5.0 – 7.0	14	13	20.0	5.0	1.00	100
601081	6KM M 16x1,5	M 16x1.5	4.0 – 10.0	17	15	22.0	6.0	1.50	100
601082	6KM M 20x1,5	M 20x1.5	6.5 – 12.0	20	18	23.0	6.0	2.40	50
601083	6KM M 20x1,5	M 20x1.5	6.5 – 12.5	22	20	25.0	6.5	2.60	50
601084	6KM M 20x1,5	M 20x1.5	6.5 – 15.0	24	22	27.0	6.5	3.10	50
601085	6KM M 25x1,5	M 25x1.5	9.0 – 19.0	30	28	30.0	7.0	4.90	50
601086	6KM M 32x1,5	M 32x1.5	17.0 – 27.0	40	37	32.0	8.0	8.80	25
601087	6KM M 40x1,5	M 40x1.5	23.0 – 33.0	50	47	38.0	9.0	14.40	10
601088	6KM M 50x1,5	M 50x1.5	29.0 – 39.0	57	54	42.0	10.0	19.80	5
601089	6KM M 63x1,5	M 63x1.5	35.0 – 45.0	64	60	45.0	10.0	24.00	5
6KM PG									
600050	6KM PG 7	PG 7	4.0 – 6.0	14	13	20.0	5.0	0.82	100
600051	6KM PG 9	PG 9	8.0 – 10.0	17	15	22.0	6.0	1.30	100
600052	6KM PG 11	PG 11	8.0 – 10.0	20	18	23.0	6.0	1.91	50
600053	6KM PG 13,5	PG 13.5	10.0 – 12.0	22	20	25.0	6.5	2.60	100
600054	6KM PG 16	PG 16	8.0 – 14.0	24	22	27.0	6.5	2.96	50
600055	6KM PG 21	PG 21	17.0 – 19.0	30	28	30.0	7.0	4.64	50
600056	6KM PG 29	PG 29	26.0 – 28.0	40	37	32.0	8.0	8.80	50
600057	6KM PG 36	PG 36	33.0 – 35.0	50	47	38.0	9.0	13.40	20
600058	6KM PG 42	PG 42	39.0 – 41.0	57	54	42.0	10.0	18.90	5
600059	6KM PG 48	PG 48	43.0 – 45.0	64	60	45.0	10.0	23.48	10

Cable fittings and accessories

Metal fittings ZEV



Properties

- Fitting according to DIN 46320 with hexagon base and clamp ring
- Clamping buckle included as loose part

Technical data

Protection class IP 55


Design

- Material Brass nickel-plated
- Clamp ring (ER) Neoprene

Part-No.	Type	G	Clamping range D mm	SW mm	L mm	L 1 mm	weight approx. kg/100 piece	PU piece
ZEV metric								
600020	ZEV M 16	M 16x1.5	6.0 – 10.0	17	28.0	5.5	2.70	50
600021	ZEV M 20	M 20x1.5	10.0 – 14.0	24	32.0	6.5	5.00	50
600022	ZEV M 25	M 25x1.5	13.0 – 20.0	30	35.0	7.0	7.50	25
600023	ZEV M 32	M 32x1.5	18.0 – 27.0	40	38.0	8.5	14.96	25
ZEV PG								
600001	ZEV PG 9	PG 9	6.0 – 9.0	17	28.0	5.5	2.50	50
600002	ZEV PG 11	PG 11	8.0 – 12.0	20	30.0	6.0	3.64	50
600003	ZEV PG 13.5	PG 13.5	10.0 – 14.0	22	31.0	6.5	4.40	50
600004	ZEV PG 16	PG 16	10.0 – 16.0	24	32.0	6.5	5.13	50
600005	ZEV PG21	PG 21	14.0 – 21.0	30	35.0	7.0	7.70	25
600006	ZEV PG 29	PG 29	20.0 – 30.0	40	38.0	8.5	14.44	25

Cable fittings and accessories

Metal fittings ZED



Properties

- Pressure relief pressure screw
- Clamping buckle included as loose part


Design

- Material Brass nickel-plated

Part-No.	Type	G	Clamping range D mm	SW mm	L mm	L 1 mm	weight approx. kg/100 piece	PU piece
ZED PG								
600011	ZED PG 9	PG 9	5.8 – 10.0	17	17.0	5.0	1.60	100
600012	ZED PG 11	PG 11	8.0 – 12.0	20	18.5	6.5	2.40	50
600013	ZED PG 13	PG 13	10.0 – 14.0	22	24.0	7.5	2.80	50
600014	ZED PG 16	PG 16	11.7 – 16.0	24	19.0	6.0	3.20	50
600015	ZED PG 21	PG 21	12.1 – 21.0	30	20.0	7.0	5.00	25
600016	ZED PG 29	PG 29	20.1 – 30.0	40	23.0	8.0	8.00	10

Cable fittings and accessories

Metal fitting ZEV2



Properties

- Centring strain relief fitting with hexagon base and clamp ring
- Clamping buckle included as loose part

Technical data

Protection class IP 55


Design

- Material Brass nickel-plated
- Clamp ring (ER) Neoprene

Part-No.	Type	G	Clamping range D mm	SW 1 = across flats mm	SW 2 = across flats mm	L mm	L 1 mm	weight approx. kg/100 piece	PU piece
ZEV2 metric									
600290	ZEV2 M 12	M 12x1.5	5.0 – 8.0	9	16	26.0	5.0	1.30	50
600291	ZEV2 M 16	M 16x1.5	7.0 – 10.0	17	19	26.0	6.0	2.80	50
600292	ZEV2 M 20	M 20x1.5	11.0 – 15.0	24	27	35.0	6.5	5.60	50
600293	ZEV2 M 25	M 25x1.5	12.0 – 20.0	30	34	37.0	7.0	13.10	25
600294	ZEV2 M 32	M 32x1.5	19.0 – 27.0	40	42	39.0	8.0	16.40	25
600295	ZEV2 M 40	M 40x1.5	25.5 – 34.0	55	55	50.0	9.0	22.00	10
600296	ZEV2 M 50	M 50x1.5	31.0 – 43.0	60	62	54.0	10.0	26.50	5
600297	ZEV2 M 63	M 63x1.5	35.0 – 48.0	64	64	54.0	10.0	35.50	5
ZEV2 PG									
600089	ZEV2 PG 7	PG 7	5.0 – 8.0	9	16	26.0	5.0	1.85	50
600080	ZEV2 PG 9	PG 9	7.0 – 10.0	17	19	26.0	6.0	2.28	50
600081	ZEV2 PG 11	PG 11	7.5 – 12.0	20	22	28.0	6.0	4.20	50
600082	ZEV2 PG 13.5	PG 13.5	7.5 – 12.0	22	24	32.0	6.5	4.90	50
600083	ZEV2 PG 16	PG 16	11.0 – 15.0	24	27	35.0	6.5	5.74	50
600084	ZEV2 PG 21	PG 21	12.0 – 20.0	30	34	37.0	7.0	9.30	25
600085	ZEV2 PG 29	PG 29	19.0 – 27.0	40	42	39.0	8.0	15.35	25
600086	ZEV2 PG 36	PG 36	26.5 – 34.0	55	55	50.0	9.0	26.60	10
600087	ZEV2 PG 42	PG 42	31.0 – 42.0	60	62	54.0	10.0	34.85	5
600088	ZEV2 PG 48	PG 48	35.0 – 48.0	64	64	54.0	10.0	42.40	5

Cable fittings and accessories

Metal fitting with shield termination ZEV2-S



Properties

- Centring strain relief fitting with hexagon base
- Gasket and shield termination
- Pressure screw with two clamping buckles

Technical data

Protection class IP 55

Design

- Material Brass nickel-plated
- Gasket Neoprene
- Contact ring (KR) Brass tins

Part-No.	Type	G	Clamping range D mm	SW 1 = across flats mm	SW 2 = across flats mm	L mm	L 1 mm	K inner mm	weight approx. kg/100 piece	PU piece
ZEV2-S metric										
600611	ZEV2-S M 20	M 20x1.5	11.0 – 15.0	24	27	35.0	6.0	15	5.10	50
600612	ZEV2-S M 25	M 25x1.5	12.0 – 20.0	30	34	37.0	7.0	13	8.00	25
600613	ZEV2-S M 32	M 32x1.5	19.0 – 27.0	40	42	39.0	8.0	27	14.10	25
600614	ZEV2-S M 40	M 40x1.5	25.5 – 34.0	50	52	50.0	8.0	33	29.00	10
600615	ZEV2-S M 50	M 50x1.5	31.0 – 43.0	57	59	54.0	9.0	39	35.00	5
600616	ZEV2-S M 63	M 63x1.5	35.0 – 48.0	66	64	54.0	10.0	45	42.60	5

Contact ring inner diameter in mm = K

Cable fittings and accessories

Metal fitting ZED2




Properties

- Centring pressure relief pressure screw
- Pressure screw with two clamping buckles

Design


- Material Brass nickel-plated



Part-No.	Type	G	Clamping range D mm	SW mm	L mm	L 1 mm	weight approx. kg/100 piece	PU piece
ZED2 PG								
600028	ZED2 PG 7	PG 7	5.0 – 8.0	16	15.0	5.0	1.31	100
600060	ZED2 PG 9	PG 9	7.0 – 10.0	19	16.0	6.0	1.84	100
600061	ZED2 PG 11	PG 11	7.0 – 12.0	22	17.5	6.0	2.75	50
600062	ZED2 PG 13.5	PG 13.5	7.0 – 12.0	24	17.8	6.5	3.45	50
600063	ZED2 PG 16	PG 16	11.0 – 15.0	27	18.3	6.5	3.67	50
600064	ZED2 PG 21	PG 21	12.0 – 20.0	34	20.8	7.0	6.24	25
600065	ZED2 PG 29	PG 29	19.0 – 27.0	42	21.8	8.0	9.20	20
600066	ZED2 PG 36	PG 36	25.5 – 34.0	55	25.3	9.0	29.00	10
600067	ZED2 PG 42	PG 42	31.0 – 43.0	62	26.3	10.0	22.00	10

Cable fittings and accessories

Metal fitting FKV

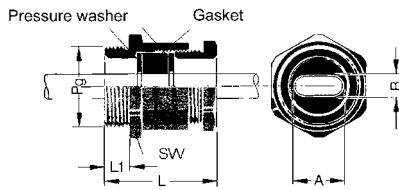

Properties

- Flat cable fitting with special seal and two pressure disks.

Technical data

Protection class IP 55

Design

- Material Brass nickel-plated
- Gasket Neoprene

Part-No.	Type	G	A mm	B mm	SW mm	L mm	L 1 mm	Gasket	Pressure disk	weight approx. kg/100 piece	PU piece
FKV PG											
600741	FKV PG 16	PG 16	15.0	5.0	24	26.0	6.5	5.0 × 15	6.0 × 16	3.05	1
600742	FKV PG 21	PG 21	18.0	6.0	30	29.0	6.5	6.0 × 18	8.5 × 20	4.80	1
600748	FKV PG 21	PG 21	19.0	7.5	30	30.0	7.0	7.5 × 19	8.5 × 20	4.85	1
600743	FKV PG 29	PG 29	28.0	6.0	40	33.0	8.0	6.0 × 28	8.0 × 30	9.65	1
600749	FKV PG 29	PG 29	22.0	8.0	40	33.0	8.0	8.0 × 22	10.0 × 24	9.60	1
600744	FKV PG 36	PG 36	35.0	6.0	50	33.0	8.0	6.0 × 35	8.0 × 38	16.75	1
600751	FKV PG 36	PG 36	32.0	6.0	50	37.0	9.0	6.0 × 32	8.0 × 34	16.70	1
600753	FKV PG 36	PG 36	37.0	12.5	50	39.0	9.0	12.5 × 37	14.5 × 38	15.15	1
600752	FKV PG 36	PG 36	38.0	7.0	50	38.0	9.0	7.0 × 38	9.0 × 40	16.50	1
600745	FKV PG 42	PG 42	41.0	13.5	58	38.0	9.0	13.5 × 41	14.5 × 41	24.00	1
600746	FKV PG 48	PG 48	44.0	14.0	65	44.0	10.0	14.0 × 44	16.0 × 46	33.25	1

Cable fittings and accessories

Metal connection elbow AW



Properties


- Elbow fitting, waterproof

Technical data

Protection class IP 55

Design


- Material Zinc die-casting



Part-No.	Type	G	G1	D mm	K mm	SW mm	L mm	L 1 mm	H mm	weight ap- prox. kg/100 pie- ce	PU piece
AW PG											
600241	AW PG 9	PG 9	PG 9	19.0	10.0	19	23.0	11.0	21.0	3.18	50
600243	AW PG 11	PG 11	PG 11	22.0	13.0	22	25.0	12.0	21.5	4.05	50
600245	AW PG 13.5	PG 13.5	PG 13.5	24.0	14.0	24	27.0	12.0	24.0	5.26	50
600246	AW PG 16	PG 16	PG 16	27.0	17.0	27	29.5	13.0	25.0	6.60	50
600248	AW PG 21	PG 21	PG 21	32.0	22.0	32	34.5	15.0	30.0	9.80	25
600249	AW PG 29	PG 29	PG 29	41.0	29.0	41	38.5	15.0	34.5	1.67	1

Cable fittings and accessories

Metal connection elbow AWK



Properties

- Elbow fitting, waterproof
- Direction of reduction continuously adjustable

Technical data

Protection class IP 65

Design

- Material Zinc die-casting
- O-ring (OR) Perbunan®
- Locking nut Brass

Part-No.	Type	G	D mm	K mm	SW mm	SW 1 = ac- ross flats mm	L mm	L 4 mm	H mm	weight ap- prox. kg/100 pie- ce	PU piece
AWK PG											
600261	AWK PG 9	PG 9	19.0	10.0	19	19	23.0	7	21.0	3.66	50
600263	AWK PG 11	PG 11	22.0	13.0	22	22	25.0	8	21.5	4.48	50
600265	AWK PG 13.5	PG 13.5	24.0	14.0	24	24	27.0	7	24.0	5.74	50
600266	AWK PG 16	PG 16	27.0	17.0	27	27	29.5	8	25.0	7.20	50
600268	AWK PG 21	PG 21	32.0	22.0	32	32	34.5	9	30.0	12.20	50
600269	AWK PG 29	PG 29	41.0	29.0	41	41	38.5	9	34.5	18.00	1

Cable fittings and accessories

Metal accessory GMS EMV




Properties

- Hexagonal nut for potential equalisation
- With cutting edges for cutting through layers of paint or power coating for optimal contact

Design


- Material Brass nickel-plated



Part-No.	Type	G	SW mm	S1 mm	S2 mm	weight approx. kg/100 piece	PU piece
GMS EMV metric							
600460	GMS EMV M 12 × 1.5	M 12×1.5	15	3.3	2.8	0.26	50
600461	GMS EMV M 16 × 1.5	M 16×1.5	19	3.5	3.0	0.37	50
600462	GMS EMV M 20 × 1.5	M 20×1.5	24	3.5	3.0	0.65	50
600463	GMS EMV M 25 × 1.5	M 25×1.5	30	3.5	3.0	1.06	25
600464	GMS EMV M 32 × 1.5	M 32×1.5	36	4.0	3.5	1.35	25
600465	GMS EMV M 40 × 1.5	M 40×1.5	46	4.6	4.0	2.85	20
600466	GMS EMV M 50 × 1.5	M 50×1.5	60	5.6	5.0	5.46	15
600467	GMS EMV M 63 × 1.5	M 63×1.5	70	6.7	6.0	5.92	12
GMS EMV PG							
600530	GMS EMV PG 7	PG 7	15	3.3	2.8	0.25	50
600531	GMS EMV PG 9	PG 9	18	3.3	2.8	0.33	50
600532	GMS EMV PG 11	PG 11	21	3.5	3.0	0.38	50
600533	GMS EMV PG 13.5	PG 13.5	23	3.5	3.0	0.45	50
600534	GMS EMV PG 16	PG 16	26	3.5	3.0	0.63	25
600535	GMS EMV PG 21	PG 21	32	4.0	3.5	0.98	25
600536	GMS EMV PG 29	PG 29	41	4.6	4.0	1.58	20
600537	GMS EMV PG 36	PG 36	51	5.6	5.0	2.58	15
600538	GMS EMV PG 42	PG 42	60	5.6	5.0	3.12	12
600539	GMS EMC PG 48	PG 48	64	6.1	5.5	3.74	12

Cable fittings and accessories

Metal accessory RR metric to PG



Properties

- Reducing ring from **metric to metric**
- Or **PG to PG** with large outer threads and small inner threads


Design

- Material Brass nickel-plated

Part-No.	Type	G	G1	SW mm	L mm	L 1 mm	weight approx. kg/100 piece	PU piece
RR metric metric/metric								
600220	RR M 16/M 12	M 16x1.5	M 12x1.5	18	8.5	6.0	0.64	100
600221	RR M 20/M 12	M 20x1.5	M 12x1.5	24	9.0	6.5	1.57	100
600222	RR M 20/M 16	M 20x1.5	M 16x1.5	24	9.0	6.5	0.95	100
600223	RR M 25/M 16	M 25x1.5	M 16x1.5	28	10.0	7.0	2.70	100
600224	RR M 25/M 20	M 25x1.5	M 20x1.5	28	10.0	7.0	1.81	100
600225	RR M 32/M 20	M 32x1.5	M 20x1.5	34	11.5	8.0	4.62	50
600226	RR M 32/M 25	M 32x1.5	M 25x1.5	34	11.5	8.0	3.00	50
600227	RR M 40/M 25	M 40x1.5	M 25x1.5	45	11.5	8.0	7.60	25
600228	RR M 40/M 32	M 40x1.5	M 32x1.5	45	11.5	8.0	4.50	50
600229	RR M 50/M 32	M 50x1.5	M 32x1.5	55	14.0	10.0	13.00	10
600230	RR M 50/M 40	M 50x1.5	M 40x1.5	55	14.0	10.0	7.50	10
600231	RR M 63/M 40	M 63x1.5	M 40x1.5	64	14.0	10.0	21.50	5
600232	RR M 63/M 50	M 63x1.5	M 50x1.5	64	14.0	10.0	12.50	10
RR PG PG/PG								
600400	RR PG 9/PG 7	PG 9	PG 7	17	8.5	6.0	0.45	100
600411	RR PG 11/PG 7	PG 11	PG 7	20	8.5	6.0	1.20	100
600401	RR PG 11/PG 9	PG 11	PG 9	20	8.5	6.0	0.65	100
600408	RR PG 13.5/PG 9	PG 13.5	PG 9	22	9.0	6.5	1.01	100
600402	RR PG 13.5/PG 11	PG 13.5	PG 11	22	9.0	6.5	0.47	100
600409	RR PG 16/PG 9	PG 16	PG 9	24	9.5	6.5	0.85	100
600410	RR PG 16/PG 11	PG 16	PG 11	24	9.5	6.5	1.01	100
600403	RR PG 16/PG 13.5	PG 16	PG 13.5	24	9.5	6.5	0.59	100
600413	RR PG 21/PG 11	PG 21	PG 11	30	10.0	7.0	2.90	50
600414	RR PG 21/PG 13.5	PG 21	PG 13.5	30	10.0	7.0	1.23	50
600404	RR PG 21/PG 16	PG 21	PG 16	30	10.0	7.0	1.95	50
600407	RR PG 29/PG 16	PG 29	PG 16	39	11.5	8.0	6.42	50
600405	RR PG 29/PG 21	PG 29	PG 21	39	11.5	8.0	4.34	50
600412	RR PG 36/PG 21	PG 36	PG 21	50	21.5	9.0	11.40	25
600406	RR PG 36/PG 29	PG 36	PG 29	50	12.5	9.0	3.42	25
600416	RR PG 42/PG 36	PG 42	PG 36	57	14.0	10.0	7.00	10
600417	RR PG 48/PG 36	PG 48	PG 36	64	14.0	10.0	12.80	25
600415	RR PG 48/PG 42	PG 48	PG 42	64	14.0	10.0	6.40	10

Cable fittings and accessories

Metal accessory EW

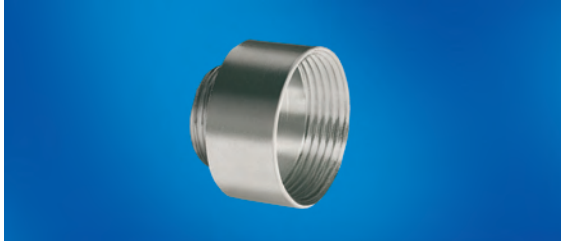


Properties

- Expansion from **metric to metric**
- Or **PG to PG** with small outer thread and large inner thread

Design

- Material Brass nickel-plated




Part-No.	Type	G	G1	SW mm	L mm	L 1 mm	d1 mm	weight ap- prox. kg/100 piece	PU piece
EW metric metric/metric									
600280	EW M 12/M 16	M 12x1.5	M 16x1.5	18	18.0	9.0	8.0	0.93	100
600281	EW M 16/M 20	M 16x1.5	M 20x1.5	22	33.0	10.0	12.0	1.39	100
600282	EW M 20/M 25	M 20x1.5	M 25x1.5	27	17.5	6.0	15.0	2.14	100
600283	EW M 25/M 32	M 25x1.5	M 32x1.5	34	19.5	7.0	20.0	3.10	100
600284	EW M 32/M 40	M 32x1.5	M 40x1.5	42	22.5	8.0	26.0	13.00	50
600285	EW M 40/M 50	M 40x1.5	M 50x1.5	52	27.5	8.0	34.0	16.30	50
600286	EW M 50/M 63	M 50x1.5	M 63x1.5	65	31.0	9.0	44.0	12.15	25
EW PG PG/PG									
600500	EW PG 7/PG 9	PG 7	PG 9	17	15.0	3.0	10.0	0.68	100
600501	EW PG 9/PG 11	PG 9	PG 11	20	16.5	6.0	12.0	0.84	100
600502	EW PG 11/PG 13.5	PG 9	PG 13.5	22	17.5	6.0	12.0	1.02	100
600503	EW PG 11/PG 13.5	PG 11	PG 13.5	22	17.5	6.0	15.0	1.18	100
600504	EW PG 11/PG 16	PG 11	PG 16	24	18.5	6.0	15.0	1.30	100
600506	EW PG 13.5/PG 16	PG 13.5	PG 16	24	19.0	6.5	17.0	1.34	100
600507	EW PG 13.5/PG 12	PG 13.5	PG 12	30	21.0	6.5	17.0	2.15	50
600508	EW PG 16/PG 21	PG 16	PG 21	30	21.0	6.5	18.5	2.44	50
600510	EW PG 21/PG 29	PG 21	PG 29	39	23.0	7.0	24.0	3.60	50
600511	EW PG 29/PG 36	PG 29	PG 36	50	27.5	8.0	32.0	7.44	50
600512	EW PG 36/PG 42	PG 36	PG 42	57	31.0	9.0	42.0	9.20	10
600513	EW PG 42/PG 48	PG 42	PG 48	64	33.0	10.0	48.0	14.40	10

d1 = smallest internal diameter

Cable fittings and accessories

Metal accessory RR



Properties

- **Metric to PG**
- Reducing ring with large metric outer thread and small PG inner thread


Design

- Material Brass nickel-plated

Part-No.	Type	G	G1	SW mm	L mm	L 1 mm	weight approx. kg/100 piece	PU piece
RR M/PG metric/PG								
601000	RR M 16/PG 7	M 16x1.5	PG 7	18	8.5	6.0	0.53	100
601001	RR M 20/PG 9	M 20x1.5	PG 9	24	8.5	6.0	1.06	50
601002	RR M 25/PG 11	M 25x1.5	PG 11	28	10.0	7.0	1.98	50
601003	RR M 25/PG 13	M 25x1.5	PG 13	28	10.0	7.0	1.51	50
601004	RR M 25/PG 16	M 25x1.5	PG 16	28	10.0	7.0	0.80	50
601005	RR M 32/PG 16	M 32x1.5	PG 16	34	11.5	8.0	3.82	25
601006	RR M 32/PG 21	M 32x1.5	PG 21	45	11.5	8.0	1.62	25
601007	RR M 40/PG 21	M 40x1.5	PG 21	45	11.5	8.0	6.55	25
601008	RR M 50/PG 29	M 50x1.5	PG 29	55	12.5	9.0	9.45	10
601010	RR M 63/PG 42	M 63x1.5	PG 42	68	14.0	10.0	8.70	5

Cable fittings and accessories

Metal accessory EW metric to PG

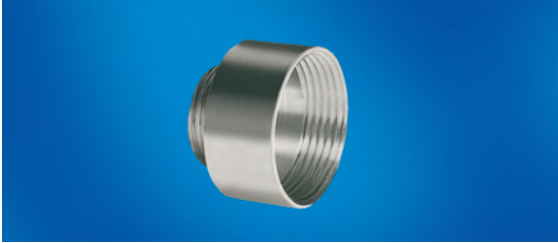


Properties

- Metric to PG
- Expansion with small metric outer thread and large PG inner thread

Design

- Material Brass nickel-plated



Part-No.	Type	G	G1	SW mm	L mm	L 1 mm	d1 mm	weight ap- prox. kg/100 piece	PU piece
EW M/PG metric/PG									
601021	EW M 12/PG 9	M 12x1.5	PG 9	17	15.0	5.0	8.2	0.82	100
601022	EW M 16/PG 11	M 16x1.5	PG 11	20	16.5	6.0	12.0	0.86	100
601023	EW M 20/PG 16	M 20x1.5	PG 16	24	19.0	6.5	15.0	1.55	100
601024	EW M 25/PG 21	M 25x1.5	PG 21	30	21.0	6.5	21.0	2.52	50
601025	EW M 32/PG 29	M 32x1.5	PG 29	39	23.0	7.0	27.5	4.24	50
601026	EW M 40/PG 36	M 40x1.5	PG 36	50	27.5	8.0	32.0	8.40	50
601027	EW M 50/PG 42	M 50x1.5	PG 42	57	31.0	9.0	44.0	14.90	25
601028	EW M 50/PG 48	M 50x1.5	PG 48	64	32.0	9.0	44.0	15.90	25

d1 = smallest internal diameter

Cable fittings and accessories

Metal accessory BLMS




Properties

- Blank plug according to DIN 46320

Design

- Material Brass nickel-plated



Part-No.	Type	G	L mm	L 1 mm	weight approx. kg/100 piece	PU piece
BLMS metric						
600090	BLMS M 12	M 12x1.5	8.0	5.0	0.38	100
600091	BLMS M 16	M 16x1.5	9.0	6.0	0.55	100
600092	BLMS M 20	M 20x1.5	9.5	6.5	0.91	100
600093	BLMS M 25	M 25x1.5	11.0	7.0	1.56	100
600094	BLMS M 32	M 32x1.5	12.0	8.0	2.50	50
600095	BLMS M 40	M 40x1.5	12.0	8.0	3.96	50
600096	BLMS M 50	M 50x1.5	15.0	9.0	7.90	25
600097	BLMS M 63	M 63x1.5	16.0	10.0	10.19	10
BLMS metr. with O ring						
600201	BLMS M 12	M 12x1.5	7.5	5.0	0.32	100
600202	BLMS M 16	M 16x1.5	8.0	5.0	0.82	100
600203	BLMS M 20	M 20x1.5	9.5	6.0	0.87	100
600204	BLMS M 25	M 25x1.5	11.0	7.0	1.57	100
600205	BLMS M 32	M 32x1.5	12.0	8.0	2.42	50
600206	BLMS M 40	M 40x1.5	13.0	8.0	3.90	50
600207	BLMS M 50	M 50x1.5	15.0	9.0	7.25	25
600208	BLMS M 63	M 63x1.5	16.0	10.0	12.03	10
BLMS PG						
600590	BLMS PG 7	PG 7	8.0	5.0	0.34	100
600591	BLMS PG 9	PG 9	9.0	6.0	0.53	100
600592	BLMS PG 11	PG 11	9.0	6.0	0.73	100
600593	BLMS PG 13.5	PG 13.5	9.5	6.5	0.86	100
600594	BLMS PG 16	PG 16	9.5	6.5	1.13	100
600595	BLMS PG 21	PG 21	11.0	7.0	2.06	50
600596	BLMS PG 29	PG 29	12.0	8.0	3.78	25
600597	BLMS PG 36	PG 36	15.0	9.0	8.10	25

Cable fittings and accessories

Plastic and metal accessories MFDE



Application

- For retroactive installation in our cable fittings Type Top T in plastic and brass, if necessary these are to be drilled yourself depending on needs
- PG 11 suitable for M 16
PG 13.5 suitable for M 20
PG 16 suitable for M 25
PG 21 suitable for M 32

Properties

- Multiple sealing insert for two or more cables in a fitting



Design

- Material TPE

Part-No.	Type	Outer-Ø mm	Number of cables x Ø mm	weight approx. kg/100 piece	PU piece
MFDE PG					
600626	MFDE PG 9	10.0	2 x 3.0	0.57	100
600627	MFDE PG 9	10.0	4 x 3.0	0.46	100
600541	MFDE PG 9	10.0	0 x 0.0	0.70	100
600628	MFDE PG 11	13.0	2 x 4.0	1.00	100
600629	MFDE PG 11	13.0	2 x 4.5	0.80	100
600635	MFDE PG 11	13.0	3 x 4.0	0.10	100
600636	MFDE PG 11	13.0	3 x 5.0	0.70	100
600542	MFDE PG 11	13.0	0 x 0.0	0.11	100
600638	MFDE PG 13.5	15.0	2 x 4.5	1.32	100
600639	MFDE PG 13.5	15.0	2 x 5.0	1.20	100
600640	MFDE PG 13.5	15.0	2 x 6.0	1.20	100
600637	MFDE PG 13.5	15.0	3 x 4.0	1.40	100
600630	MFDE PG 13.5	15.0	3 x 5.0	1.20	100
600543	MFDE PG 13.5	15.0	0 x 0.0	1.60	100
600641	MFDE PG 16	17.0	2 x 4.0	2.00	100
600644	MFDE PG 16	17.0	2 x 6.0	1.78	100
600631	MFDE PG 16	17.0	3 x 4.0	1.92	100
600643	MFDE PG 16	17.0	3 x 5.0	1.60	100
600646	MFDE PG 16	17.0	4 x 6.0	1.20	100
600633	MFDE PG 16	17.0	5 x 4.0	1.62	100
600544	MFDE PG 16	17.0	0 x 0.0	2.30	100
600645	MFDE PG 16	17.0	3 x 6.0	1.00	100
600647	MFDE PG 16	17.0	3 x 6.5	1.20	100
600642	MFDE PG 16	17.0	4 x 4.0	1.73	100
600632	MFDE PG 16	17.0	4 x 5.0	1.20	100
600648	MFDE PG 21	22.0	2 x 7.0	3.60	100
600651	MFDE PG 21	22.0	2 x 8.0	3.20	100
600653	MFDE PG 21	22.0	2 x 9.0	3.20	100
600649	MFDE PG 21	22.0	3 x 7.0	3.00	100
600652	MFDE PG 21	22.0	3 x 8.0	2.65	100
600634	MFDE PG 21	22.0	4 x 7.0	2.60	100
600545	MFDE PG 21	22.0	0 x 0.0	5.60	100
600656	MFDE PG 29	29.5	5 x 8.5	6.00	100
600654	MFDE PG 29	29.5	6 x 5.0	7.70	100
600655	MFDE PG 29	29.5	8 x 5.0	7.40	100
600546	MFDE PG 29	29.5	0 x 0.0	9.80	100

Cable fittings and accessories

Plastic and metal accessories ASI DE

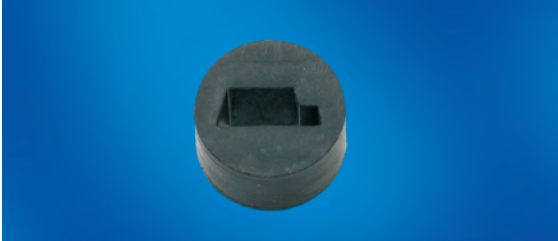

Application

- For retroactive installation of our cable fittings
- **Cable dimensions:** 4.0 mm x 10.0 mm +/- 0.2 mm
- **Suitable for installation with the following types:**
 - TOP TP PG 13.5
 - TOP TP M 20
 - TOP T PG 13.5
 - TOP T M 20

Properties

- Seal insert for ASI bus cables

Design

- Material TPE

Part-No.	Type	Outer-Ø mm	weight approx. kg/100 piece	PU piece
ASI DE				
600120	ASI DE PG 13.5	14.8	0.15	1

Cable conduit - Technical data

General

The cable connections between fixed and moving parts are the weak points in machine and plant engineering and construction. They are (among others) supports, boring carriages, spreader bars, lifting carriages and grippers. The tightly-sitting single conductors have no freedom of movement whatsoever when the cable bends. They are subject to high and strong alternating tensile loading – especially for multiple-conductor control cables and conductor breakage is inevitable at the peripheral equipment. The results are costly standstill periods, expensive repairs and production downtimes for the user as well as a loss of image for the machine manufacturer. Because the machines are only as reliable as the supply cables, security should be planned for in advance: with LÜTZE cable conduits and the matching fittings.

Advantages of cable conduit compared with cables

- The single conductors have enough play. They can move freely against each other. This prevents strong alternating tensile loading when bending.
- The flexible conduit is populated with conductors according to requirements– in the required quantity with the necessary cross section.
- It can be retrofitted without difficulties.
- The connections offer secure protection against fluids and are can handle tension loads.


LÜTZE cable conduits from soft PVC and LÜTZE fittings have been proven thousands of times in machine and device construction. With their added reinforcement (hard PVC spiral, steel wire braiding), they are suitable for practically all conditions and every application case. The combination of LÜTZE cable conduits and LÜTZE fittings guarantees extremely simple and time-saving installation.

Technical data for cable conduit

CONDUFLEX	PVC
CONDUFIX	Polyamide
Breaking elongation at 20 °C	350 %
Tensile strength	2500 N/cm ²
Dielectric constant	approx. 3
Dielectric strength: approx.	20 kV/mm

Technical data for fittings and accessories

Turning parts:	MS 58, nickel-plated
Fitting CFK:	Ultramid®, grey, oil- and benzine-resistant, shock-resistant, temperature-resistant from – 20 °C to + 110 °C
Chuck cone:	Makrolon, grey
Hose connection:	shock-resistant, temperature-resistant from – 30 °C to + 130 °C
O-Rings	Perbunan®, oil- and benzine-resistant

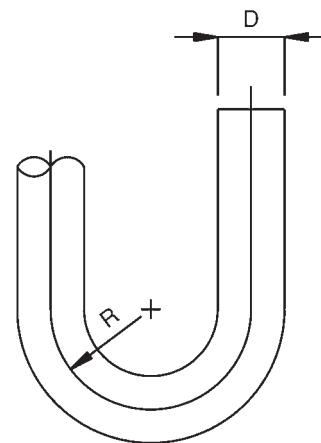

Dimension diagram for the specification of the smallest bending radius

CONDUFIX

An innovative patented system for the protection and routing of electrical cables and lead wires - provides a solution for almost any installation problem.

High mechanical strength and patented special profile:

Flexible, corrugated conduit in specially modified polyamide 6

High flexibility due to special profile:

maintains its shape and roundness even when bent. This prevents kinks within the minimum bend radius and protects cables and lead wires.

12-sided polygon for easy tightening with a wrench

Description of nominal width

Hexagon wrench area

Thread type and size




Releasing ring

Holder cams are located all around inside the conduit fitting: impossible to pull apart due to the mechanical lock. The stronger you pull, the tighter the grip.


Tapered conduit socket for protection class IP66 without O-ring

Wide contact area with integrated sealing lips

Use of standard O-rings for protection class IP68

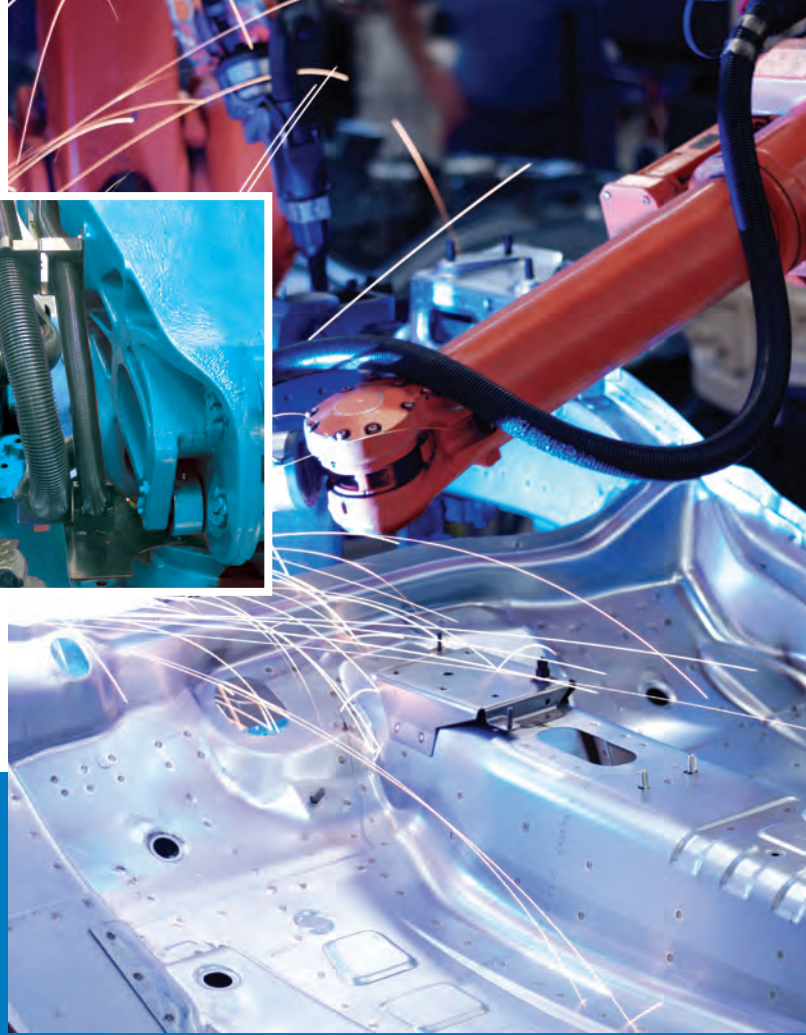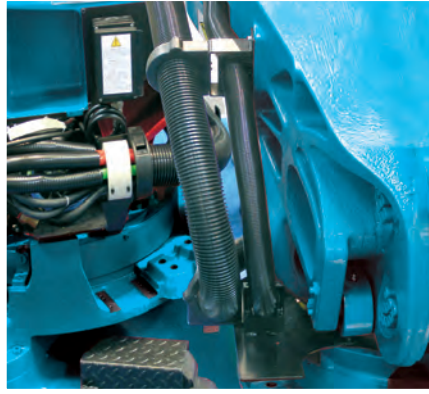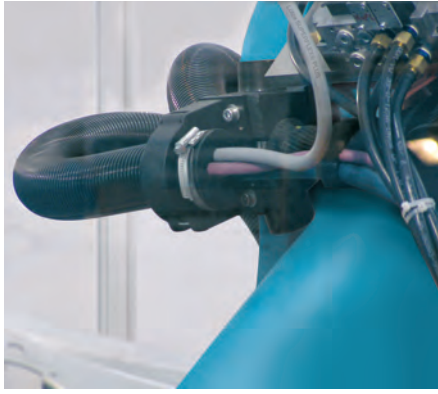


IP66

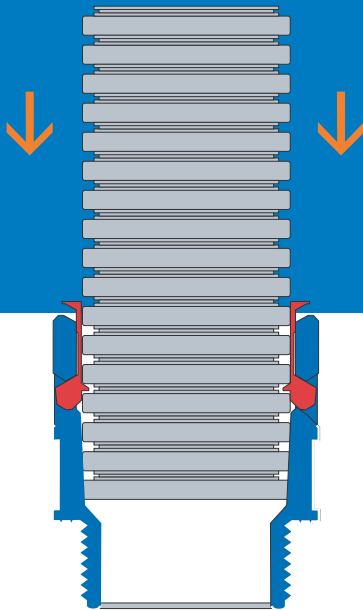

Extremely simple and very quick assembly:


Simply push the protective conduit firmly into the conduit fitting as far as it will go - that's all there is to it! Protection class IP 66 is provided without O-ring.

IP68

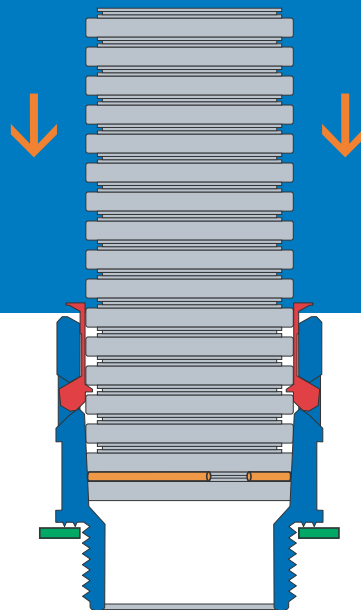

IP 68/IP69K

The simple insertion of an O-ring into the last groove (insert side) on the patented profile of the protective conduit and the insertion of a flat gasket on the thread side of the cable gland increases the protection to class IP 68 and for cleaning purposes to IP 69K at 100 bar water jet pressure


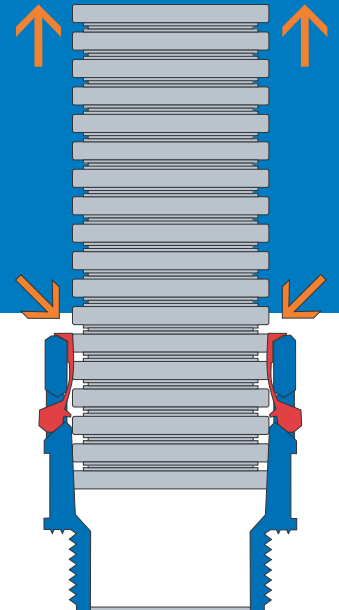


Simple disconnect:

1. Press conduit further into the conduit fitting, thus allowing the holder cams to loosen.
2. Simultaneously press the releasing ring firmly against conduit fitting to fully release the holder cams.
3. Turn conduit slightly and pull apart.

Cable conduits and conduit fittings

Cable protective conduit Condufix OL PA, light weight type

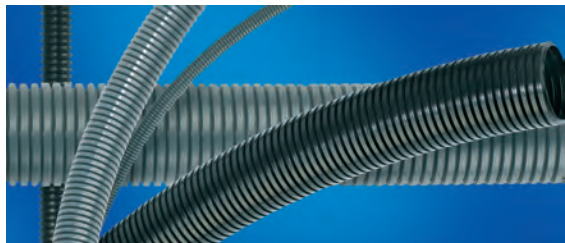

Properties

- Flexible protective conduit, parallel corrugation, special shape for inclusion of an O-ring for high degree of protection in conjunction with Condufix fittings
- Heat stabilized, no flame propagation
- Free from halogen, phosphorus, cadmium
- Resistant to fuels, mineral oils, greases, alkalies
- Classification according to EN 61386-1/2, 14434066(7)-21-
- UL file No.:E 22 59 13

Technical data

Temperature range	-25 °C to 105 °C
Filament control	850 °C IEC 60695
Oxygen index	>25% EN ISO 4589
Burning behaviour	V2 UL94

Application

- Light to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets and moving machine parts.


Design

- Polyamid 6, especially modified

Part-No.	Colour	Approvals	NW	d mm	D mm	Minimum bending radius (fixed)	Weight kg/100 m	PU M
grey								
272100	grey		7	6.3	10.0	10	1.81	50
272101	grey	2	10	9.7	13.0	14	2.48	50
272102	grey	2	12	12.2	15.8	22	3.32	50
272103	grey	2	17	16.8	21.2	30	5.59	50
272104	grey	2	23	22.6	28.5	41	9.02	50
272105	grey	2	29	28.3	34.5	48	12.24	50
272106	grey	2	36	36.3	42.5	59	15.23	30
272107	grey	2	48	47.4	54.5	68	21.18	30
272108	grey	2	70	69.1	80.7	160	42.33	10
272109	grey	2	95	91.7	106.0	212	66.04	10
black								
272120	black		7	6.3	10.0	10	1.81	50
272121	black	2	10	9.7	13.0	14	2.48	50
272122	black	2	12	12.2	15.8	22	3.32	50
272123	black	2	17	16.8	21.2	30	5.59	50
272124	black	2	23	22.6	28.5	41	9.02	50
272125	black	2	29	28.3	34.5	48	12.24	50
272126	black	2	36	36.3	42.5	59	15.23	30
272127	black	2	48	47.4	54.5	68	21.18	30
272128	black	2	70	69.1	80.7	160	42.33	10
272129	black	2	95	91.7	106.0	212	66.04	10

Cable conduits and conduit fittings

Cable conduit Condufix OS PA, standard style



Application

- Light up to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets and moving machine parts.



Properties

- Flexible protective conduit, parallel corrugation, special shape for inclusion of an O-ring for high degree of protection in conjunction with Condufix fittings
- Heat stabilized, no flame propagation
- Free from halogen, phosphorus, cadmium
- Resistant to fuels, mineral oils, greases, alkalies
- Classification according to EN 61386-1/23, 24434066(7)-21-
- UL file No.: E 22 59 13

Technical data

Temperature range	-40°C to +105°C temporary 150°C
Filament control	850 °C IEC 60695
Oxygen index	>25% EN ISO 4589
Burning behaviour	V2 UL94


Design

- Polyamid 6, especially modified

Part-No.	Colour	Approvals	NW	d mm	D mm	Minimum bending radius (fixed)	Weight kg/100 m	PU M
grey								
272140	grey		7	6.2	10.0	15	2.05	50
272141	grey	2	10	9.6	13.0	19	2.80	50
272142	grey	2	12	12.0	15.8	27	3.68	50
272143	grey	2	17	16.5	21.2	39	6.21	30
272144	grey	2	23	22.3	28.5	46	10.03	30
272145	grey	2	29	28.2	34.5	53	13.48	30
272146	grey	2	36	36.0	42.5	64	16.48	10
272147	grey	2	48	47.1	54.5	73	23.52	10
black								
272160	black		7	6.2	10.0	15	2.05	50
272161	black	2	10	9.6	13.0	19	2.80	50
272162	black	2	12	12.0	15.8	27	3.68	50
272163	black	2	17	16.5	21.2	39	6.21	30
272164	black	2	23	22.3	28.5	46	10.03	30
272165	black	2	29	28.2	34.5	53	13.48	30
272166	black	2	36	36.0	42.5	64	16.48	10
272167	black	2	48	47.1	54.5	73	23.52	10

Cable conduits and conduit fittings

Cable conduit Condufix OV PA, reinforced style



Application

- Medium up to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets and moving machine parts

Properties

- Flexible protective conduit, parallel corrugation, special shape for inclusion of an O-ring for high degree of protection in conjunction with Condufix fittings
- Heat stabilized, no flame propagation
- Free from halogen, phosphorus, cadmium
- Resistant to fuels, mineral oils, greases, alkalies
- Classification according to EN 61386-1/23, 25434066(7)-31-

Technical data

Temperature range	-40°C to +105°C temporary 150°C
Filament control	960 °C IEC 60695
Oxygen index	>27% EN ISO 4589
Burning behaviour	V2 UL94


Design

- Polyamid 6, especially modified

Part-No.	Colour	NW	d mm	D mm	Minimum bending radius (fixed)	Weight kg/100 m	PU M
grey							
272171	grey	10	9.0	13.0	24	3.61	50
272172	grey	12	11.6	15.8	32	4.68	50
272173	grey	17	14.5	21.2	44	9.03	30
272174	grey	23	21.0	28.5	51	14.02	30
272175	grey	29	26.5	34.5	58	18.04	30
272176	grey	36	35.1	42.5	69	22.99	10
272177	grey	48	46.4	54.5	83	32.03	10
black							
272181	black	10	9.0	13.0	24	3.61	50
272182	black	12	11.6	15.8	32	4.68	50
272183	black	17	14.5	21.2	44	9.03	30
272184	black	23	21.0	28.5	51	14.02	30
272185	black	29	26.5	34.5	58	18.04	30
272186	black	36	35.1	42.5	69	22.99	10
272187	black	48	46.4	54.5	83	32.03	10

Cable conduits and conduit fittings

Cable conduit Condufix OR PA, robot style



Application

- Robotics, light to heavy machine and plant construction
- Machines, apparatuses, devices
- Shipbuilding and railroad construction / rail transportation technology, vehicle manufacturing as well as control cabinets and especially flexible machine parts

Properties

- Flexible protective conduit, parallel corrugation, special shape for inclusion of an O-ring for high degree of protection in conjunction with Condufix fittings
- Heat stabilized
- Free from halogen, phosphorus, cadmium
- Resistant to fuels, mineral oils, greases, alkalies
- Classification according to EN 61386-1/23, 14524066(7)-21-

Technical data

Temperature range	-45°C to +90°C temporary 110°C
Filament control	750 °C IEC 60695
Oxygen index	>24% EN ISO 4589
Burning behaviour	HB UL94


Design

- Polyamid 12, especially modified

Part-No.	Colour	NW	d mm	D mm	Minimum bending radius (fixed)	Minimum bending radius (moving)	Weight kg/100 m	PU M
grey								
272200	grey	7	6.5	10.0	20	45	2.23	50
272201	grey	10	9.5	13.0	29	59	2.81	50
272202	grey	12	12.0	15.8	32	72	3.79	50
272203	grey	17	16.4	21.2	40	89	6.18	30
272204	grey	23	22.6	28.5	50	116	10.03	30
272205	grey	29	28.1	34.5	68	138	13.52	30
272206	grey	36	36.0	42.5	79	199	16.78	10
272207	grey	48	47.5	54.5	98	228	12.53	10
272208	grey	70	67.2	80.0	190	390	46.04	10
272209	grey	95	91.3	106.0	222	497	75.03	10
black								
272210	black	7	6.5	10.0	20	45	2.23	50
272211	black	10	9.5	13.0	29	59	2.81	50
272212	black	12	12.0	15.8	32	72	3.79	50
272213	black	17	16.4	21.2	40	89	6.18	30
272214	black	23	22.6	28.5	50	116	10.03	30
272215	black	29	28.1	34.5	68	138	13.52	30
272216	black	36	36.0	42.5	79	199	16.78	10
272217	black	48	47.5	54.5	98	228	12.53	10
272218	black	70	67.2	80.0	190	390	46.04	10
272219	black	95	91.3	106.0	222	497	75.03	10

Cable conduits and cable fittings

Cable conduit-retainer Condufix OH PA

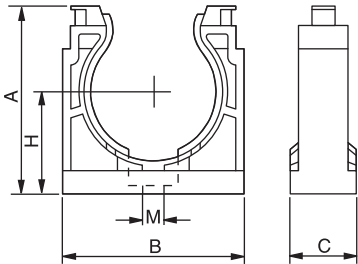

Application

- For fast and secure mounting of Condufix protective conduit

Properties

- The integrated bar fixes the protective conduit axially, thus allowing the protective conduit to rotate within its own axis within the holder
- With collet for cable ties for heavy suspended load
- Impact-resistant, no flame propagation
- Free from halogen, phosphorus, cadmium
- Resistant to against fuels, mineral oils, greases, alkalies

Technical data

Temperature range	-30°C to +105°C temporary 150°C
Filament control	960 °C IEC 60695
Oxygen index	>30% EN ISO 4589
Burning behaviour	V2 UL94


Design

- Polyamid 6, especially modified

Part-No.	Colour	NW	A mm	B mm	C mm	H mm	M mm	weight ap- prox. kg/100 pie- ce	PU piece	Cable tie Article num- ber
grey										
272230	grey	7	20.0	17.0	20.0	12.0	M 4	0.22	100	680105
272231	grey	10	23.0	21.0	20.0	14.0	M 5	0.28	100	680105
272232	grey	12	26.0	25.0	20.0	15.0	M 5	0.36	100	680105
272233	grey	17	32.0	32.0	20.0	18.0	M 5	0.58	100	680105
272234	grey	23	41.0	40.0	20.0	23.0	M 6	0.94	50	680108
272235	grey	29	47.0	46.0	20.0	26.0	M 6	1.08	30	680108
272236	grey	36	57.0	56.0	20.0	32.0	M 6	1.54	20	680108
272237	grey	48	70.0	70.0	20.0	39.0	M 6	2.10	10	680108
black										
272240	black	7	20.0	17.0	20.0	12.0	M 4	0.22	100	680105
272241	black	10	23.0	21.0	20.0	14.0	M 5	0.28	100	680105
272242	black	12	26.0	25.0	20.0	15.0	M 5	0.36	100	680105
272243	black	17	32.0	32.0	20.0	18.0	M 5	0.58	100	680105
272244	black	23	41.0	40.0	20.0	23.0	M 6	0.94	50	680108
272245	black	29	47.0	46.0	20.0	26.0	M 6	1.08	30	680108
272246	black	36	57.0	56.0	20.0	32.0	M 6	1.54	20	680108
272247	black	48	70.0	70.0	20.0	39.0	M 6	2.10	10	680108

Cable conduits and cable fittings

Cable conduit-retainer Condufix OH St

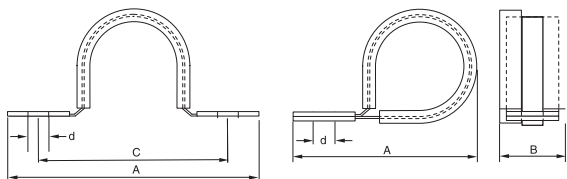

Application

- For fast and secure mounting of Condufix protective conduit

Properties

- The integrated rubber profile protects and holds the conduit axially
- Impact-proof, highly flame-resistant
- Resistant to against fuels, mineral oils, greases, alkalies
- Rubber profile Shore hardness A 70 ±5

Technical data

Temperature range	-35°C to +100°C temporary 130°C
-------------------	------------------------------------


Design

- Zinc-plated, strong reinforced strip ends
- Elastomer profile

Part-No.	NW	d mm	A mm	B mm	C mm	weight approx. kg/100 piece	PU piece
Elastomer profile black							
272250	7	5.3	25.0	15.0		0.40	100
272251	10	5.3	27.0	15.0		0.45	100
272252	12	5.3	30.0	15.0		0.40	100
272253	17	5.3	40.0	15.0		0.95	100
272254	23	5.3	48.0	15.0		1.25	50
272255	29	5.3	60.0	15.0		2.30	30
272256	36	5.3	74.0	15.0		2.80	20
272257	48	5.3	86.0	15.0		3.30	20
272258	70	8.4	128.0	25.0	109.00	6.50	1
272259	95	8.4	140.0	25.0	120.00	8.30	1

Cable conduits and conduit fittings

Protective conduit fitting Condufix OG PA Straight design



- Heat stabilized
- Free from halogen, phosphorus, cadmium
- Resistant to against fuels, mineral oils, greases, alkalies
- Classification according to EN 61386-1/2, -43-066(7)-31

Technical data

Protection class	IP 66 (Standard) resp. IP 68 (20m water column) in conjunction with an O-ring in the protective conduit profile (insert area last groove) and flat seal at threads
Temperature range	-25 °C to 105 °C
Filament control	960 °C IEC 60695
Oxygen index	>30% EN ISO 4589
Burning behaviour	V2 UL94

Design

- Polyamid 6, especially modified

Application

- Robotics, light to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets


Properties

- Fixes the ends of the protective conduit in the entering guides for cables on control cabinets, control units etc. Very fast and simple installation, the protective conduit is simply inserted into the fitting as far as it will go
- The product has no parts that can get lost

Part-No.	Colour	Approvals	NW	G1	d mm	A mm	C mm	D mm	SW mm	G mm	weight approx. kg/100 piece	PU piece
metric												
272260	grey		7	M 12x1.5	6.5	35.0	19.0	17.0	15	11	0.46	100
272261	grey	2	10	M 16x1.5	10.0	37.0	21.0	21.0	18	11	0.60	100
272262	grey	2	12	M 16x1.5	10.0	37.0	26.0	25.0	20	11	0.76	100
272263	grey	2	12	M 20x1.5	14.0	37.0	26.0	25.0	20	11	0.78	100
272264	grey	2	17	M 20x1.5	14.5	44.0	31.0	30.0	27	11	1.24	100
272265	grey	2	17	M 25x1.5	18.5	45.0	31.0	34.0	27	12	1.35	100
272266	grey	2	23	M 25x1.5	18.5	48.0	37.0	37.0	34	12	1.75	50
272267	grey	2	23	M 32x1.5	25.5	51.0	37.0	42.0	34	15	1.96	50
272268	grey	2	29	M 32x1.5	25.5	52.0	46.0	46.0	42	15	2.86	30
272269	grey	2	29	M 40x1.5	32.0	56.0	46.0	52.0	42	19	3.24	30
272270	grey	2	36	M 40x1.5	32.0	60.0	54.0	54.0	50	19	4.22	20
272271	grey	2	36	M 50x1.5	42.0	60.0	54.0	62.0	50	19	4.59	20
272272	grey	2	48	M 50x1.5	42.0	61.0	69.0	69.0	66	19	6.69	10
272273	grey	2	48	M 63x1.5	54.0	61.0	69.0	75.0	66	19	7.27	10
metric												
272280	black		7	M 12x1.5	6.5	35.0	19.0	17.0	15	11	0.46	100
272281	black	2	10	M 16x1.5	10.0	37.0	21.0	21.0	18	11	0.60	100
272282	black	2	12	M 16x1.5	10.0	37.0	26.0	25.0	20	11	0.76	100
272283	black	2	12	M 20x1.5	14.0	37.0	26.0	25.0	20	11	0.78	100
272284	black	2	17	M 20x1.5	14.5	44.0	31.0	30.0	27	11	1.24	100
272285	black	2	17	M 25x1.5	18.5	45.0	31.0	34.0	27	12	1.35	100
272286	black	2	23	M 25x1.5	18.5	48.0	37.0	37.0	34	12	1.75	50
272287	black	2	23	M 32x1.5	25.5	51.0	37.0	42.0	34	15	1.96	50
272288	black	2	29	M 32x1.5	25.5	52.0	46.0	46.0	42	15	2.86	30
272289	black	2	29	M 40x1.5	32.0	56.0	46.0	52.0	42	19	3.24	30
272290	black	2	36	M 40x1.5	32.0	60.0	54.0	54.0	50	19	4.22	20
272291	black	2	36	M 50x1.5	42.0	60.0	54.0	62.0	50	19	4.59	20
272292	black	2	48	M 50x1.5	42.0	61.0	69.0	69.0	66	19	6.69	10
272293	black	2	48	M 63x1.5	54.0	61.0	69.0	75.0	66	19	7.27	10

Cable conduits and conduit fittings

Protective conduit fitting Condufix OG PA Straight design



Application

- Robotics, light to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets

Properties

- Fixes the ends of the protective conduit in the entering guides for cables on control cabinets, control units etc. Very fast and simple installation, the protective conduit is simply inserted into the fitting as far as it will go
- The product has no parts that can get lost



- Heat stabilized
- Free from halogen, phosphorus, cadmium
- Resistant to against fuels, mineral oils, greases, alkalies
- Classification according to EN 61386-1/2, -43-066(7)-31

Technical data

Protection class	IP 66 (Standard) resp. IP 68 (20m water column) in conjunction with an O-ring in the protective conduit profile (insert area last groove) and flat seal at threads
Temperature range	-25 °C to 105 °C
Filament control	960 °C IEC 60695
Oxygen index	>30% EN ISO 4589
Burning behaviour	V2 UL94


Design

- Polyamid 6, especially modified

Part-No.	Colour	Approvals	NW	G1	d mm	A mm	C mm	D mm	SW mm	G mm	weight approx. kg/100 piece	PU piece
PG												
272300	grey		7	PG 7	8.0	35.0	19.0	17.0	15	11	0.47	100
272301	grey	2	10	PG 7	8.0	37.0	21.0	21.0	18	11	0.56	50
272302	grey	2	10	PG 9	10.3	37.0	21.0	21.0	18	11	0.58	100
272303	grey	2	12	PG 9	10.3	37.0	26.0	25.0	20	11	0.75	50
272304	grey	2	12	PG 11	14.0	37.0	26.0	25.0	20	11	0.75	100
272305	grey	2	12	PG 13.5	14.0	37.0	26.0	25.0	20	11	0.81	50
272306	grey	2	17	PG 13.5	14.0	44.0	31.0	28.0	27	11	1.27	100
272307	grey	2	17	PG 16	17.0	44.0	31.0	29.0	27	11.5	1.25	100
272308	grey	2	23	PG 21	22.0	48.0	37.0	36.0	34	12.5	1.79	50
272309	grey	2	29	PG 29	30.0	49.0	46.0	46.0	42	12.5	2.89	30
272310	grey	2	36	PG 36	37.5	55.0	54.0	56.0	50	14	4.29	30
272311	grey	2	48	PG 48	50.0	56.0	69.0	69.0	66	14	6.74	10
PG												
272320	black		7	PG 7	8.0	35.0	19.0	17.0	15	11	0.47	100
272321	black	2	10	PG 7	8.0	37.0	21.0	21.0	18	11	0.56	50
272322	black	2	10	PG 9	10.3	37.0	21.0	21.0	18	11	0.58	100
272323	black	2	12	PG 9	10.3	37.0	26.0	25.0	20	11	0.75	50
272324	black	2	12	PG 11	14.0	37.0	26.0	25.0	20	11	0.75	100
272325	black	2	12	PG 13.5	14.0	37.0	26.0	25.0	20	11	0.81	50
272326	black	2	17	PG 13.5	14.0	44.0	31.0	28.0	27	11	1.27	100
272327	black	2	17	PG 16	17.0	44.0	31.0	29.0	27	11.5	1.25	100
272328	black	2	23	PG 21	22.0	48.0	37.0	36.0	34	12.5	1.79	50
272329	black	2	29	PG 29	30.0	49.0	46.0	46.0	42	12.5	2.89	30
272330	black	2	36	PG 36	37.5	55.0	54.0	56.0	50	14	4.29	20
272331	black	2	48	PG 48	50.0	56.0	69.0	69.0	66	14	6.74	10

Cable conduits and conduit fittings

Protective conduit fitting Condufix OG PM Straight design with metal threads



- Heat stabilized
- Free from halogen, phosphorus, cadmium
- Resistant to against fuels, mineral oils, greases, alkalies
- Classification according to EN 61386-1/23, -43-066(7)-31

Technical data

Protection class	IP 66 (Standard) resp. IP 68 (20m water column) in conjunction with an O-ring in the protective conduit profile (insert area last groove) and flat seal at threads
Temperature range	-25 °C to 105 °C
Filament control	960 °C IEC 60695
Oxygen index	>30% EN ISO 4589
Burning behaviour	V2 UL94

Design

- Polyamid 6, especially modified

Application

- Robotics, light to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets


Properties

- Fixes the ends of the protective conduit in the entering guides for cables on control cabinets, control units etc. Very fast and simple installation, the protective conduit is simply inserted into the fitting as far as it will go
- The product has no parts that can get lost

Part-No.	Colour	NW	G1	d mm	A mm	C mm	D mm	SW mm	G mm	weight approx. kg/100 piece	PU piece
metric											
272700	grey	7	M 12x1.5	6.6	43.0	18.0	20.0	15	10	1.50	50
272701	grey	10	M 16x1.5	10.3	43.0	21.0	24.0	18	10	1.98	50
272702	grey	12	M 16x1.5	10.3	43.0	25.0	25.0	20	10	2.14	50
272703	grey	12	M 20x1.5	14.5	43.0	25.0	29.0	20	10	2.53	50
272704	grey	17	M 20x1.5	14.5	47.0	30.0	29.0	27	10	2.88	30
272705	grey	17	M 25x1.5	18.8	49.0	30.0	35.0	27	11	3.70	30
272706	grey	23	M 25x1.5	18.8	55.0	36.0	35.0	34	11	4.08	30
272707	grey	23	M 32x1.5	25.8	57.0	36.0	43.0	34	13	5.30	30
272708	grey	29	M 32x1.5	25.8	56.0	44.0	43.0	42	13	6.06	20
272709	grey	29	M 40x1.5	32.5	56.0	44.0	54.0	42	13	9.00	20
272710	grey	36	M 40x1.5	32.5	61.0	52.0	55.0	50	13	10.33	10
272711	grey	36	M 50x1.5	41.1	64.0	52.0	67.0	50	14	13.60	10
272712	grey	48	M 50x1.5	42.0	62.0	69.0	67.0	66	14	15.92	10
272713	grey	48	M 63x1.5	53.4	62.0	69.0	76.0	66	14	17.18	10
metric											
272720	black	7	M 12x1.5	6.6	43.0	18.0	20.0	15	10	1.50	50
272721	black	10	M 16x1.5	10.3	43.0	21.0	24.0	18	10	1.98	50
272722	black	12	M 16x1.5	10.3	43.0	25.0	25.0	20	10	2.14	50
272723	black	12	M 20x1.5	14.5	43.0	25.0	29.0	20	10	2.53	50
272724	black	17	M 20x1.5	14.5	47.0	30.0	29.0	27	10	2.88	30
272725	black	17	M 25x1.5	18.8	49.0	30.0	35.0	27	11	3.70	30
272726	black	23	M 25x1.5	18.8	55.0	36.0	35.0	34	11	4.08	30
272727	black	23	M 32x1.5	25.8	57.0	36.0	43.0	34	13	5.30	30
272728	black	29	M 32x1.5	25.8	56.0	44.0	43.0	42	13	6.06	20
272729	black	29	M 40x1.5	32.5	56.0	44.0	54.0	42	13	9.00	20
272730	black	36	M 40x1.5	32.5	61.0	52.0	55.0	50	13	10.33	10
272731	black	36	M 50x1.5	41.1	64.0	52.0	67.0	50	14	13.60	10
272732	black	48	M 50x1.5	42.0	62.0	69.0	67.0	66	14	15.92	10
272733	black	48	M 63x1.5	53.4	62.0	69.0	76.0	66	14	17.18	10

Cable conduits and conduit fittings

Protective conduit fitting Condufix OG PM Straight design with metal threads



- Heat stabilized
- Free from halogen, phosphorus, cadmium
- Resistant to against fuels, mineral oils, greases, alkalies
- Classification according to EN 61386-1/23, -43-066(7)-31

Technical data

Protection class	IP 66 (Standard) resp. IP 68 (20m water column) in conjunction with an O-ring in the protective conduit profile (insert area last groove) and flat seal at threads
Temperature range	-25 °C to 105 °C
Filament control	960 °C IEC 60695
Oxygen index	>30% EN ISO 4589
Burning behaviour	V2 UL94

Design

- Polyamid 6, especially modified

Application

- Robotics, light to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets


Properties

- Fixes the ends of the protective conduit in the entering guides for cables on control cabinets, control units etc. Very fast and simple installation, the protective conduit is simply inserted into the fitting as far as it will go
- The product has no parts that can get lost

Part-No.	Colour	NW	G1	d mm	A mm	C mm	D mm	SW mm	G mm	weight approx. kg/100 piece	PU piece
PG											
272742	grey	12	PG 11	13.1	45.0	25.0	29.0	20	12	2.52	50
272744	grey	17	PG 16	17.0	50.0	30.0	34.0	27	13	3.60	30
272745	grey	23	PG 21	22.2	58.0	36.0	40.0	34	14	4.60	30
272746	grey	29	PG 29	30.2	59.0	46.0	52.0	42	14	8.72	20
272747	grey	36	PG 36	37.6	67.0	54.0	63.0	50	17	13.72	10
272748	grey	48	PG 48	50.1	68.0	69.0	73.0	66	17	16.76	5
PG											
272752	black	12	PG 11	13.1	45.0	25.0	29.0	20	12	2.52	50
272754	black	17	PG 16	17.0	50.0	30.0	34.0	27	13	3.60	30
272755	black	23	PG 21	22.2	58.0	36.0	40.0	34	14	4.60	30
272756	black	29	PG 29	30.2	59.0	46.0	52.0	42	14	8.72	20
272757	black	36	PG 36	37.6	67.0	54.0	63.0	50	17	13.72	10
272758	black	48	PG 48	50.1	68.0	69.0	73.0	66	17	16.76	5

Cable conduits and conduit fittings

Protective conduit fitting Condufix OW PA 90°-angle design



- Resistant to against fuels, mineral oils, greases, alkalies
- Classification according to EN 61386-1/23, -43-066(7)-31

Technical data

Protection class	IP 66 (Standard) resp. IP 68 (20m water column) in conjunction with an O-ring in the protective conduit profile (insert area last groove) and flat seal at threads
Temperature range	-25 °C to 105 °C
Filament control	960 °C IEC 60695
Oxygen index	>30% EN ISO 4589
Burning behaviour	V2 UL94

Design

- Polyamid 6, especially modified

Application

- Robotics, light to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets


Properties

- Fixes the ends of the protective conduit in the entering guides for cables on control cabinets, control units etc. Very fast and simple installation, the protective conduit is simply inserted into the fitting as far as it will go
- The product has no parts that can get lost
- Heat stabilized
- Free from halogen, phosphorus, cadmium

Part-No.	Colour	NW	G1	d mm	A mm	B mm	C mm	D mm	H mm	G mm	weight approx. kg/100 piece	PU piece
metric												
272360	grey	10	M 16x1.5	10.0	35.0	42.0	21.0	21.0	11.0	11	0.89	50
272361	grey	12	M 16x1.5	10.5	39.0	44.0	25.0	23.0	15.0	11	1.37	50
272362	grey	12	M 20x1.5	12.3	39.0	45.0	25.0	26.0	15.0	11	1.33	50
272363	grey	17	M 20x1.5	14.5	45.0	58.0	30.0	30.0	18.0	11	2.24	50
272364	grey	23	M 25x1.5	18.5	53.0	66.0	36.0	37.0	23.0	12	3.42	30
272365	grey	29	M 32x1.5	25.5	66.0	76.0	45.0	46.0	27.0	15	5.70	20
272366	grey	36	M 40x1.5	32.0	79.0	89.0	54.0	55.0	33.0	19	9.30	10
272367	grey	48	M 50x1.5	42.0	92.0	103.0	68.0	69.0	39.0	19	15.32	10
metric												
272370	black	10	M 16x1.5	10.0	35.0	42.0	21.0	21.0	11.0	11	0.89	50
272371	black	12	M 16x1.5	10.5	39.0	44.0	25.0	23.0	15.0	11	1.37	50
272372	black	12	M 20x1.5	12.3	39.0	45.0	25.0	26.0	15.0	11	1.33	50
272373	black	17	M 20x1.5	14.5	45.0	58.0	30.0	30.0	18.0	11	2.24	50
272374	black	23	M 25x1.5	18.5	53.0	66.0	36.0	37.0	23.0	12	3.42	30
272375	black	29	M 32x1.5	25.5	66.0	76.0	45.0	46.0	27.0	15	5.70	20
272376	black	36	M 40x1.5	32.0	79.0	89.0	54.0	55.0	33.0	19	9.30	10
272377	black	48	M 50x1.5	42.0	92.0	103.0	68.0	69.0	39.0	19	15.32	10
PG												
272380	grey	10	PG 9	10.3	35.0	42.0	21.0	21.0	11.0	11.5	0.87	50
272381	grey	12	PG 11	14.0	39.0	45.0	25.0	25.0	15.0	11.5	1.22	50
272382	grey	17	PG 13.5	14.0	45.0	56.0	30.0	27.0	18.0	11.5	2.42	50
272383	grey	17	PG 16	17.0	45.0	57.0	30.0	29.0	18.0	11.5	2.21	50
272384	grey	23	PG 21	22.0	53.0	65.0	37.0	36.0	23.0	12.5	3.17	30
272385	grey	29	PG 29	30.0	65.0	76.0	45.0	46.0	28.0	12.5	5.16	20
272386	grey	36	PG 36	37.5	79.0	89.0	54.0	56.0	33.0	14	8.25	10
272387	grey	48	PG 48	50.0	92.0	103.0	68.0	69.0	39.0	14	12.26	10
PG												
272390	black	10	PG 9	10.3	35.0	42.0	21.0	21.0	11.0	11.5	0.87	50
272391	black	12	PG 11	14.0	39.0	45.0	25.0	25.0	15.0	11.5	1.22	50
272392	black	17	PG 13.5	14.0	45.0	56.0	30.0	27.0	18.0	11.5	2.42	50
272393	black	17	PG 16	17.0	45.0	57.0	30.0	29.0	18.0	11.5	2.21	50
272394	black	23	PG 21	22.0	53.0	65.0	37.0	36.0	23.0	12.5	3.17	30
272395	black	29	PG 29	30.0	65.0	76.0	45.0	46.0	28.0	12.5	5.16	20
272396	black	36	PG 36	37.5	79.0	89.0	54.0	56.0	33.0	14	8.25	10
272397	black	48	PG 48	50.0	92.0	103.0	68.0	69.0	39.0	14	12.26	10

Cable conduits and conduit fittings

Protective conduit fitting Condufix OB PA 90°-arc angle design



Application

- Robotics, light to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets

Properties

- Fixes the ends of the protective conduit in the entering guides for cables on control cabinets, control units etc. Very fast and simple installation, the protective conduit is simply inserted into the fitting as far as it will go
- The product has no parts that can get lost
- Heat stabilized
- Free from halogen, phosphorus, cadmium

- Resistant to against fuels, mineral oils, greases, alkalies
- Classification according to EN 61386-1/23, -43-066(7)-31

Technical data

Protection class	IP 66 (Standard) resp. IP 68 (20m water column) in conjunction with an O-ring in the protective conduit profile (insert area last groove) and flat seal at threads
Temperature range	-25 °C to 105 °C
Filament control	960 °C IEC 60695
Oxygen index	>30% EN ISO 4589
Burning behaviour	V2 UL94


Design

- Polyamid 6, especially modified

Part-No.	Colour	NW	G1	d mm	A mm	B mm	C mm	D mm	H mm	G mm	weight approx. kg/100 piece	PU piece
metric												
272414	grey	17	M 25×1.5	17.5	52.0	75.0	28.0	34.0	26.0	12	1.88	50
272415	grey	23	M 32×1.5	25.7	69.0	89.0	36.0	40.0	36.0	15	3.25	30
272416	grey	29	M 40×1.5	32.3	81.0	101.0	43.0	50.0	40.0	19	5.14	10
272417	grey	36	M 50×1.5	40.0	98.0	124.0	51.0	60.0	53.0	19	8.53	10
272418	grey	48	M 63×1.5	53.6	106.0	141.0	66.0	75.0	54.0	19	12.86	5
metric												
272424	black	17	M 25×1.5	17.5	52.0	75.0	28.0	34.0	26.0	12	1.88	50
272425	black	23	M 32×1.5	25.7	69.0	89.0	36.0	40.0	36.0	15	3.25	30
272426	black	29	M 40×1.5	32.3	81.0	101.0	43.0	50.0	40.0	19	5.14	10
272427	black	36	M 50×1.5	40.0	98.0	124.0	51.0	60.0	53.0	19	8.53	10
272428	black	48	M 63×1.5	53.6	106.0	141.0	66.0	75.0	54.0	19	12.86	5
PG												
272434	grey	17	PG 16	14.7	51.0	72.0	28.0	30.0	25.5	11.5	1.74	50
272435	grey	23	PG 21	18.5	65.0	84.0	36.0	36.0	36.0	11	2.99	30
272436	grey	29	PG 29	25.5	75.0	99.0	43.0	46.0	39.5	13	4.76	10
272437	grey	36	PG 36	32.0	92.0	120.0	51.0	56.0	53.5	13	7.88	10
272438	grey	48	PG 48	42.0	102.0	135.0	66.0	69.0	56.0	13	11.96	5
PG												
272444	black	17	PG 16	14.7	51.0	72.0	28.0	30.0	25.5	11.5	1.74	50
272445	black	23	PG 21	18.5	65.0	84.0	36.0	36.0	36.0	11	2.99	30
272446	black	29	PG 29	25.5	75.0	99.0	43.0	46.0	39.5	13	4.76	10
272447	black	36	PG 36	32.0	92.0	120.0	51.0	56.0	53.5	13	7.88	10
272448	black	48	PG 48	42.0	102.0	135.0	66.0	69.0	56.0	13	11.96	5

Cable conduits and conduit fittings

Protective conduit fitting Condufix OB PM 90°-arch angle design with metal threads



- Resistant to against fuels, mineral oils, greases, alkalies
- Classification according to EN 61386-1/23, -43-066(7)-31

Technical data

Protection class	IP 66 (Standard) resp. IP 68 (20m water column) in conjunction with an O-ring in the protective conduit profile (insert area last groove) and flat seal at threads
Temperature range	-25 °C to 105 °C
Filament control	960 °C IEC 60695
Oxygen index	>30% EN ISO 4589
Burning behaviour	V2 UL94

Design

- Polyamid 6, especially modified, thread MS58, nickel plated

Application

- Robotics, light to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets


Properties

- Fixes the ends of the protective conduit in the entering guides for cables on control cabinets, control units etc. Very fast and simple installation, the protective conduit is simply inserted into the fitting as far as it will go
- The product has no parts that can get lost.
- Heat stabilized
- Free from halogen, phosphorus, cadmium

Part-No.	Colour	NW	G1	d mm	A mm	B mm	C mm	D mm	H mm	G mm	weight approx. kg/100 piece	PU piece
metric												
272814	grey	17	M 25x1.5	16.3	56.0	76.0	28.0	35.0	30.0	11	4.34	50
272815	grey	23	M 32x1.5	23.0	72.0	88.0	36.0	44.0	41.0	13	6.80	30
272816	grey	29	M 40x1.5	30.5	81.0	104.0	43.0	55.0	46.0	13	11.20	10
272817	grey	36	M 50x1.5	37.3	100.0	127.0	51.0	67.0	59.0	14	18.40	10
272818	grey	48	M 63x1.5	52.1	110.0	141.0	66.0	76.0	63.0	14	23.00	5
metric												
272824	black	17	M 25x1.5	16.3	56.0	76.0	28.0	35.0	30.0	11	4.34	50
272825	black	23	M 32x1.5	23.0	72.0	88.0	36.0	44.0	41.0	13	6.80	30
272826	black	29	M 40x1.5	30.5	81.0	104.0	43.0	55.0	46.0	13	11.20	10
272827	black	36	M 50x1.5	37.3	100.0	127.0	51.0	67.0	59.0	14	18.40	10
272828	black	48	M 63x1.5	52.1	110.0	141.0	66.0	76.0	63.0	14	23.00	5

Cable conduits and conduit fittings

Protective conduit fitting Condufix OA PA 45°-angle design



Application

- Robotics, light to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets

Properties

- Fixes the ends of the protective conduit in the entering guides for cables on control cabinets, control units etc. Very fast and simple installation, the protective conduit is simply inserted into the fitting as far as it will go
- The product has no parts that can get lost.
- Heat stabilized
- Free from halogen, phosphorus, cadmium

- Resistant to against fuels, mineral oils, greases, alkalies
- Classification according to EN 61386-1/23, -43-066(7)-31

Technical data

Protection class	IP 66 (Standard) resp. IP 68 (20m water column) in conjunction with an O-ring in the protective conduit profile (insert area last groove) and flat seal at threads
Temperature range	-25 °C to 105 °C
Filament control	960 °C IEC 60695
Oxygen index	>30% EN ISO 4589
Burning behaviour	V2 UL94


Design

- Polyamid 6, especially modified

Part-No.	Colour	NW	G1	d mm	A mm	B mm	C mm	D mm	G mm	weight approx. kg/100 piece	PU piece
metric											
272553	grey	12	M 16x1.5	10.5	50.0	45.0	24.0	23.0	11	0.85	50
272554	grey	17	M 20x1.5	11.5	60.0	56.0	29.0	27.0	11	1.42	50
272555	grey	23	M 25x1.5	18.5	70.0	67.0	37.0	34.0	12	2.14	30
272556	grey	29	M 32x1.5	25.7	80.0	76.0	45.0	41.0	15	3.52	10
272557	grey	36	M 40x1.5	32.0	96.0	90.0	53.0	50.0	15	5.33	10
272558	grey	48	M 50x1.5	42.0	109.0	106.0	67.0	60.0	19	7.98	5
metric											
272573	black	12	M 16x1.5	10.5	50.0	45.0	24.0	23.0	11	0.85	50
272574	black	17	M 20x1.5	11.5	60.0	56.0	29.0	27.0	11	1.42	50
272575	black	23	M 25x1.5	18.5	70.0	67.0	37.0	34.0	12	2.14	30
272576	black	29	M 32x1.5	25.7	80.0	76.0	45.0	41.0	15	3.52	10
272577	black	36	M 40x1.5	32.0	96.0	90.0	53.0	50.0	19	5.33	10
272578	black	48	M 50x1.5	42.0	109.0	106.0	67.0	60.0	19	7.98	5
PG											
272593	grey	12	PG 11	11.5	50.0	47.0	24.0	26.0	11	0.91	50
272594	grey	17	PG 16	14.7	60.0	58.0	29.0	30.0	11	1.49	50
272595	grey	23	PG 21	18.5	69.0	69.0	37.0	37.0	11	2.22	30
272596	grey	29	PG 29	25.5	78.0	79.0	45.0	46.0	12	3.65	10
272597	grey	36	PG 36	32.0	90.0	94.0	53.0	56.0	13	5.47	10
272598	grey	48	PG 48	42.0	102.0	112.0	67.0	69.0	13	8.56	5
PG											
272613	black	12	PG 11	11.5	50.0	47.0	24.0	26.0	11	0.91	50
272614	black	17	PG 16	14.7	60.0	58.0	29.0	30.0	11	1.49	50
272615	black	23	PG 21	18.5	69.0	69.0	37.0	37.0	11	2.22	30
272616	black	29	PG 29	25.5	78.0	79.0	45.0	46.0	12	3.65	10
272617	black	36	PG 36	32.0	90.0	94.0	53.0	56.0	13	5.47	10
272618	black	48	PG 48	42.0	102.0	112.0	67.0	69.0	13	8.56	5

Cable conduits and conduit fittings

Protective conduit fitting Condufix OA PM 45°-angle design with metal threads



- Resistant to against fuels, mineral oils, greases, alkalies
- Classification according to EN 61386-1/23, -43-066(7)-31

Technical data

Protection class	IP 66 (Standard) resp. IP 68 (20m water column) in conjunction with an O-ring in the protective conduit profile (insert area last groove) and flat seal at threads
Temperature range	-25 °C to 105 °C
Filament control	960 °C IEC 60695
Oxygen index	>30% EN ISO 4589
Burning behaviour	V2 UL94

Design

- Polyamid 6, especially modified, thread MS58, nickel plated

Application

- Robotics, light to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets


Properties

- Fixes the ends of the protective conduit in the entering guides for cables on control cabinets, control units etc. Very fast and simple installation, the protective conduit is simply inserted into the fitting as far as it will go
- The product has no parts that can get lost.
- Heat stabilized
- Free from halogen, phosphorus, cadmium

Part-No.	Colour	NW	G1	d mm	A mm	B mm	C mm	D mm	G mm	weight approx. kg/100 piece	PU piece
metric											
272763	grey	12	M 16x1.5	10.5	53.0	45.0	24.0	24.0	10	2.16	50
272764	grey	17	M 20x1.5	11.5	63.0	57.0	29.0	29.0	10	3.02	50
272765	grey	23	M 25x1.5	18.5	74.0	67.0	37.0	35.0	11	4.44	30
272766	grey	29	M 32x1.5	25.7	82.0	72.0	45.0	43.0	13	6.78	10
272767	grey	36	M 40x1.5	32.0	97.0	93.0	53.0	56.0	13	11.08	10
272768	grey	48	M 50x1.5	42.0	111.0	110.0	67.0	67.0	14	17.56	5
metric											
272773	black	12	M 16x1.5	10.5	53.0	45.0	24.0	24.0	10	2.16	50
272774	black	17	M 20x1.5	11.5	63.0	57.0	29.0	29.0	10	3.02	50
272775	black	23	M 25x1.5	18.5	74.0	67.0	37.0	35.0	11	4.44	30
272776	black	29	M 32x1.5	25.7	82.0	72.0	45.0	43.0	13	6.78	10
272777	black	36	M 40x1.5	32.0	97.0	93.0	53.0	56.0	13	11.08	10
272778	black	48	M 50x1.5	42.0	111.0	110.0	67.0	67.0	14	17.56	5

Cable conduits and conduit fittings

Protective conduit fitting Condufix OI PM Straight design with internal thread out of metal



- Free from halogen, phosphorus, cadmium
- Resistant to against fuels, mineral oils, greases, alkalis
- Classification according to EN 61386-1/23, -43-066(7)-31

Technical data

Protection class	IP 66 (Standard) resp. IP 68 (20m water column) in conjunction with an O-ring in the protective conduit profile (insert area last groove) and flat seal at threads
Temperature range	-25 °C to 105 °C
Filament control	960 °C IEC 60695
Oxygen index	>30% EN ISO 4589
Burning behaviour	V2 UL94

Application

- Robotics, light to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets

Properties

- Fixes the ends of the protective conduit in the entering guides for cables on control cabinets, control units etc. Very fast and simple installation, the protective conduit is simply inserted into the fitting as far as it will go
- The product has no parts that can get lost.
- Heat stabilized

Design


- Polyamid 6, especially modified, thread MS58, nickel plated

Part-No.	Colour	NW	G1	d mm	A mm	C mm	D mm	SW mm	G mm	weight approx. kg/100 piece	PU piece
metric											
272912	grey	10	M 16x1.5	9.2	41.0	21.0	25.0	18	9	1.52	50
272913	grey	12	M 20x1.5	13.7	42.0	25.0	27.0	20	11.5	2.50	50
272914	grey	17	M 20x1.5	13.7	46.0	31.0	27.0	27	11.5	2.76	50
272911	grey	17	M 25x1.5	16.5	46.0	31.0	33.0	27	11.5	3.50	50
272919	grey	23	M 32x1.5	21.4	56.0	37.0	39.0	34	11.5	5.00	30
272920	grey	29	M 40x1.5	27.3	58.0	46.0	49.0	42	13	8.50	10
metric											
272922	black	10	M 16x1.5	9.2	41.0	21.0	25.0	18	9	1.52	50
272923	black	12	M 20x1.5	13.7	42.0	25.0	27.0	20	11.5	2.50	50
272924	black	17	M 20x1.5	13.7	46.0	31.0	27.0	27	11.5	2.76	50
272921	black	17	M 25x1.5	16.5	46.0	31.0	33.0	27	11.5	3.50	50
272929	black	23	M 32x1.5	21.4	56.0	37.0	39.0	34	11.5	5.00	30
272930	black	29	M 40x1.5	27.3	58.0	46.0	49.0	42	13	8.50	10

Cable conduits and conduit fittings

Protective conduit fitting Condufix OZ PM

Straight design with integrated cable nontension out of metal

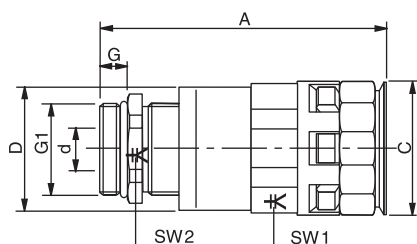

Application

- Robotics, light to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets

Properties

- Fixes the ends of the protective conduit in the entering guides for cables on control cabinets, control units etc. Very fast and simple installation, the protective conduit is simply inserted into the fitting to the mechanical stop.
- The product has no parts that can get lost.
- Heat stabilized
- Free from halogen, phosphorus, cadmium
- Resistant to against fuels, mineral oils, greases, alkalis
- Classification according to EN 61386-1/23, -43-066(7)-31

Technical data

Protection class	IP Cable fitting IP 68
Temperature range	-25 °C to 105 °C
Filament control	960 °C IEC 60695
Oxygen index	>30% EN ISO 4589
Fire performance	V2 UL94



Design

- Polyamid 6, especially modified, thread MS58, nickel plated

Part-No.	Colour	NW	G1	d mm	Clamping range D mm	A mm	C mm	D mm	SW 1 = across flats mm	SW 2 = across flats mm	G mm	weight approx. kg/100 piece	PU piece
metric													
272962	grey	10	M 16x1.5	9.2	5.0 – 9.0	56.0	21.0	25.0	18	17	5	2.52	50
272958	grey	12	M 20x1.5	13.7	9.0 – 13.0	58.0	25.0	27.0	20	22	6	4.20	50
272963	grey	17	M 20x1.5	13.7	9.0 – 13.0	62.0	31.0	27.0	27	22	6	4.46	50
272959	grey	17	M 25x1.5	16.5	11.0 – 16.0	64.0	31.0	33.0	27	27	7	6.10	50
272960	grey	23	M 32x1.5	21.4	14.0 – 21.0	74.0	37.0	42.0	34	34	8	9.40	10
272961	grey	29	M 40x1.5	27.3	19.0 – 27.0	78.0	46.0	52.0	42	43	8	15.90	10
metric													
272972	black	10	M 16x1.5	9.2	5.0 – 9.0	56.0	21.0	25.0	18	17	5	2.52	50
272968	black	12	M 20x1.5	13.7	9.0 – 13.0	58.0	25.0	27.0	20	22	6	4.20	50
272973	black	17	M 20x1.5	13.7	9.0 – 13.0	62.0	31.0	27.0	27	22	6	4.46	50
272969	black	17	M 25x1.5	16.5	11.0 – 16.0	64.0	31.0	33.0	27	27	7	6.10	50
272970	black	23	M 32x1.5	21.4	14.0 – 21.0	74.0	37.0	42.0	34	34	8	9.40	10
272971	black	29	M 40x1.5	27.2	19.0 – 27.0	78.0	46.0	52.0	42	43	8	15.90	10

Cable conduits and conduit fittings

Protective conduit fitting Condufix OF PA 90°-flange angle design

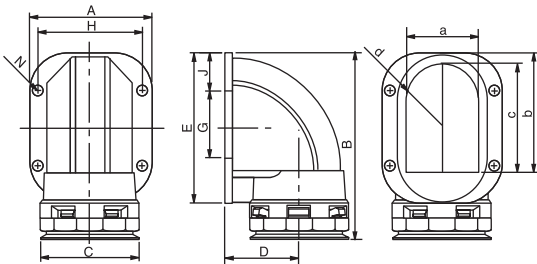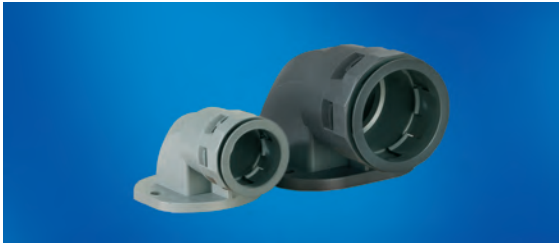

Application

- Robotics, light to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets

Properties

- Fixes the ends of the protective conduit in the entering guides for cables on control cabinets, control units etc. Very fast and simple

- installation, the protective conduit is simply inserted into the fitting as far as it will go
- The product has no parts that can get lost.
 - Heat stabilized
 - Free from halogen, phosphorus, cadmium
 - Resistant to against fuels, mineral oils, greases, alkalies
 - Classification according to EN 61386-1/23, -43-066(7)-31

Technical data

Protection class	IP 66 (Standard) resp. IP 68 (20m water column) in conjunction with an O-ring in the protective conduit profile (insert area last groove) and flat seal at threads
Filament control	960 °C IEC 60695
Temperature range	-25 °C to 105 °C
Oxygen index	>30% EN ISO 4589
Burning behaviour	V2 UL94


Design

- Polyamid 6, especially modified

Part-No.	Colour	NW	A mm	B mm	C mm	D mm	E mm	H mm	G mm	J mm	mm	b mm	c mm	d mm	N mm	weigh t ap- prox. kg/ 100 piece	PU piece
flange																	
272634	grey	17	44.0	67.0	29.0	24.0	48.4	34.3		24	17.0	33.0	25.0	8.0	5.5	1.82	50
272635	grey	23	53.0	81.0	37.0	42.0	27.0	43.2		21	24.0	42.0	37.0	12.0	5.5	2.76	30
272636	grey	29	60.0	87.0	45.0	32.0	66.0	48.2	24.0	21	30.0	49.0	45.0	15.0	6.5	4.76	10
272637	grey	36	70.0	103.0	53.0	39.0	75.6	57.2	30.0	24	36.5	60.0	54.0	18.0	6.5	6.90	10
272638	grey	48	80.0	107.0	67.0	45.0	81.0	68.2	54.1	12	47.0	61.0	55.0	24.0	6.5	11.10	5
flange																	
272644	black	17	44.0	67.0	29.0	24.0	48.4	34.3		24	17.0	33.0	25.0	8.0	5.5	1.82	50
272645	black	23	53.0	81.0	37.0	42.0	27.0	43.2		21	24.0	42.0	37.0	12.0	5.5	2.76	30
272646	black	29	60.0	87.0	45.0	32.0	66.0	48.2	24.0	21	30.0	49.0	45.0	15.0	6.5	4.76	10
272647	black	36	70.0	103.0	53.0	39.0	75.6	57.2	30.0	24	36.5	60.0	54.0	18.0	6.5	6.90	10
272648	black	48	80.0	107.0	67.0	45.0	81.0	68.2	54.1	12	47.0	61.0	55.0	24.0	6.5	11.10	5

Cable conduits and conduit fittings

Protective conduit fitting Condufix OF PA for NW 70 and NW 95 Straight and 90°-flange angle design

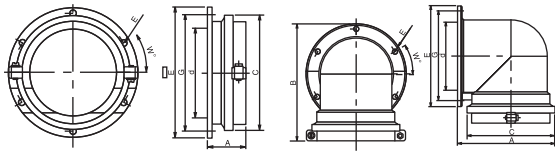

Protection class	IP IP 54
Temperature range	-25 °C to 105 °C
Filament control	960 °C IEC 60695
Oxygen index	>30% EN ISO 4589
Burning behaviour	V2 UL94

Design

- Polyamid 6, especially modified

Application

- Robotics, light to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets

Properties


- Screw-type conduit to mount conduit onto cabinets, control devices, etc
- Heat stabilized
- Free from halogen, phosphorus, cadmium
- Resistant to fuels, mineral oils, greases, alkalkies
- Classification according EN 61386-1/23, -43-066(7)-31

Technical data

Part-No.	Colour	NW	d mm	A mm	B mm	C mm	E mm	G mm	W °	weight approx. kg/100 piece	PU piece
straight											
272276	grey	70	71.0	42.0		101.0	119	105	30	10.84	5
272277	grey	95	99.0	43.0		130.0	146	132	30	15.54	5
272278	black	70	71.0	42.0		101.0	119	105	30	10.84	5
272279	black	95	99.0	43.0		130.0	146	132	30	15.54	5
90° flange elbow											
272639	grey	70	71.0	111.0	142.0	101.0	119	105	30	19.50	5
272640	grey	95	99.0	143.0	99.0	130.0	146	132	30	33.50	5
272649	black	70	71.0	111.0	142.0	101.0	119	105	30	19.50	5
272650	black	95	99.0	143.0	99.0	130.0	146	132	30	33.50	5

Cable conduits and conduit fittings

Protective conduit splitter Condufix OY PA, Y design



Application

- Robotics, light to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets

Properties

- To reduce one protective conduit size into two small sizes
- Particularly rapid and safe assembly: the protective conduit is

simply pushed into the conduit splitter as far as it will go. The product has no parts that can get lost.

- Heat stabilized
- Free from halogen, phosphorus, cadmium
- Resistant to against fuels, mineral oils, greases, alkalies
- Classification according to EN 61386-1/23, -43-066(7)-31

Technical data

Protection class	IP 66 (Standard) resp. IP 68 (20m water column) in conjunction with an O-ring in the protective conduit profile (insert area last groove) and flat seal at threads
Temperature range	-25 °C to 105 °C
Filament control	960 °C IEC 60695
Oxygen index	>30% EN ISO 4589
Burning behaviour	V2 UL94


Design

- Polyamid 6, especially modified

Part-No.	Colour	NW	A mm	B mm	C mm	c mm	D mm	E mm	N mm	H mm	J mm	weight approx. kg/100 piece	PU piece
272674	grey	171212	89.0	47.0	18.00	14.0	34.0	37	5.0	9.0	24	2.70	20
272675	grey	231717	106.0	58.0	24.00	18.0	45.0	44	6.0	12.0	28	4.38	20
272676	grey	292323	118.0	74.0	30.00	24.0	52.0	45	6.0	15.0	35	6.86	10
272677	grey	362929	141.0	89.0	38.00	30.0	60.0	52	6.0	19.0	41	11.00	5
272678	grey	483636	153.0	106.0	49.00	38.0	76.0	54	7.0	25.0	50	16.76	5
272684	black	171212	89.0	47.0	18.00	14.0	34.0	37	5.0	9.0	24	2.70	20
272685	black	231717	106.0	58.0	24.00	18.0	45.0	44	6.0	12.0	28	4.38	20
272686	black	292323	118.0	74.0	30.00	24.0	52.0	45	6.0	15.0	35	6.86	10
272687	black	362929	141.0	89.0	38.00	30.0	60.0	52	6.0	19.0	41	11.00	5
272688	black	483636	153.0	106.0	49.00	38.0	76.0	54	7.0	25.0	50	16.76	5

Cable conduits and conduit fittings

Protective conduit splitter Condufix OT PA, T design

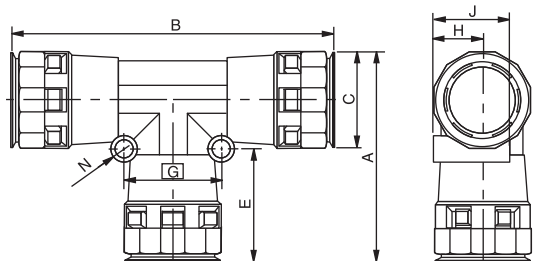

Application

- Robotics, light to heavy machine and plant construction
- Machines, apparatuses, devices
- Ship and railroad construction / rail transportation technology, vehicle construction as well as control cabinets

Properties

- To split one protective conduit size into two identical sizes
- Particularly rapid and safe assembly: the protective conduit is

simply pushed into the conduit splitter as far as it will go. The product has no parts that can get lost.

- Heat stabilized
- Free from halogen, phosphorus, cadmium
- Resistant to against fuels, mineral oils, greases, alkalis
- Classification according to EN 61386-1/23, -43-066(7)-31

Technical data

Protection class	IP 66 (Standard) resp. IP 68 (20m water column) in conjunction with an O-ring in the protective conduit profile (insert area last groove) and flat seal at threads
Temperature range	-25 °C to 105 °C
Filament control	960 °C IEC 60695
Oxygen index	>30% EN ISO 4589
Burning behaviour	V2 UL94


Design

- Polyamid 6, especially modified

Part-No.	Colour	NW	A mm	B mm	C mm	E mm	G mm	H mm	J mm	N mm	weight approx. kg/100 piece	PU piece
272651	grey	101010	46.0	72.0	20.00	27	19	10.0	18	5.0	1.44	20
272652	grey	121212	52.0	81.0	23.00	30	20	12.0	20	5.0	2.08	20
272653	grey	171717	63.0	96.0	29.00	35	28	14.0	25	6.0	3.37	20
272654	grey	232323	76.0	117.0	37.00	40	36	18.0	30	6.0	5.20	10
272655	grey	292929	85.0	128.0	45.00	41	41	22.0	36	6.0	8.42	5
272656	grey	363636	97.0	144.0	53.00	46	50	26.0	44	7.0	11.52	5
272661	black	101010	46.0	72.0	20.00	27	19	10.0	18	5.0	1.44	20
272662	black	121212	52.0	81.0	23.00	30	20	12.0	20	5.0	2.08	20
272663	black	171717	63.0	96.0	29.00	35	28	14.0	25	6.0	3.37	20
272664	black	232323	76.0	117.0	37.00	40	36	18.0	30	6.0	5.20	10
272665	black	292929	85.0	128.0	45.00	41	41	22.0	36	6.0	8.42	5
272666	black	363636	97.0	144.0	53.00	46	50	26.0	44	7.0	11.52	5

Cable conduits and conduit fittings

Flat seal for Condufix screw connections, FDNP



Application

- Seals for screw connections with outer thread

Properties

- Asbestos-free
- Resistant to against fuels, mineral oils, greases, alkalies

Technical data

Protection class	IP 68
Temperature range	-40 °C to +200 °C


Design

- Aramid fibre composite

Part-No.	Thread	d mm	D mm	S mm	weight approx. kg/100 piece	PU piece
for metric threads						
274500	M 12x1.5	12.0	18.0	1.5	0.03	100
274501	M 16x1.5	16.0	22.0	1.5	0.04	100
274502	M 20x1.5	20.0	27.0	1.5	0.06	100
274503	M 25x1.5	25.0	35.0	1.5	0.13	50
274504	M 32x1.5	32.0	43.0	1.5	0.16	30
274505	M 40x1.5	40.0	55.0	1.5	0.29	20
274506	M 50x1.5	50.0	69.0	1.5	0.33	10
274507	M 63x1.5	63.0	82.0	1.5	0.47	10
for PG- threads						
274510	PG 7	12.4	18.0	1.5	0.04	100
274511	PG 9	15.2	21.0	1.5	0.04	100
274512	PG 11	18.6	26.0	1.5	0.06	100
274513	PG 13.5	20.4	29.0	1.5	0.07	100
274514	PG 16	22.5	33.0	1.5	0.12	100
274515	PG 21	28.3	39.0	1.5	0.12	50
274516	PG 29	37.0	49.0	1.5	0.16	30
274517	PG 36	47.0	59.0	1.5	0.22	20
274518	PG 48	59.3	71.0	1.5	0.26	10

Cable conduits and conduit fittings

O-rings for Condufix cable protective conduits and flange angle, OBNR and WNBR



Application

- Seals for mounting in the last groove of the protective conduit (insertion area) as well as for flange sealing

Properties

- Resistant to mineral oils, greases, water and glycols

Technical data

Protection class	IP 68
Temperature range	-35°C to +100°C temporary 130°C

Design

- NBR 70

Part-No.	NW	d mm	S mm	weight approx. kg/100 piece	PU piece
for cable conduits; OBNR					
274520	7	6.4	1.3	0.01	100
274521	10	10.0	1.3	0.01	100
274522	12	11.5	1.5	0.01	100
274523	17	16.0	1.8	0.02	100
274524	23	22.0	2.0	0.03	50
274525	29	29.0	2.0	0.04	30
274526	36	34.0	2.3	0.06	20
274527	48	44.6	2.4	0.09	10
274528	70	70.0	4.0	0.37	5
274529	95	98.0	4.5	0.65	5
for flange angle; WNBR					
274533	17	32.0	2.5	0.07	50
274534	23	41.0	2.5	0.08	30
274535	29	51.0	2.5	0.10	10
274536	36	60.0	2.5	0.13	10
274537	48	66.0	2.5	0.14	5
274538	70	90.0	2.5	0.18	5
274539	95	117.0	2.5	0.22	5

Cable fittings and accessories

Plastic accessory GK metric




Properties

- – metric –
- Counter nut, hexagonal, with metric thread according to DIN 46320

Design

- Material Polyamide 6 GF 30
- Colour grey RAL 7001
black RAL 9005
other colour upon request



Part-No.	Type	G	SW mm	S mm	weight approx. kg/100 piece	PU piece
GK metric grey RAL 7001						
600398	GK M 12x1,5	M 12x1.5	17	5.0	0.10	100
600391	GK M 16x1,5	M 16x1.5	22	5.0	0.16	100
600392	GK M 20x1,5	M 20x1.5	26	6.0	0.23	100
600393	GK M 25x1,5	M 25x1.5	32	6.0	0.28	100
600394	GK M 32x1,5	M 32x1.5	41	7.0	0.41	100
600395	GK M 40x1,5	M 40x1.5	50	7.0	0.67	50
600396	GK M 50x1,5	M 50x1.5	60	8.0	1.14	50
600698	GK M 63x1,5	M 63x1.5	75	8.0	1.95	50
GK metric black RAL 9005						
600850	GK M 12x1,5	M 12x1.5	17	5.0	0.10	100
600851	GK M 16x1,5	M 16x1.5	22	5.0	0.14	100
600852	GK M 20x1,5	M 20x1.5	26	6.0	0.22	100
600853	GK M 25x1,5	M 25x1.5	32	6.0	0.26	100
600854	GK M 32x1,5	M 32x1.5	41	7.0	0.38	100
600855	GK M 40x1,5	M 40x1.5	50	7.0	0.63	50
600856	GK M 50x1,5	M 50x1.5	60	8.0	1.14	50
600857	GK M 63x1,5	M 63x1.5	75	8.0	1.78	50

Cable fittings and accessories

Plastic accessory GK




Properties

- Counter nut, hexagonal, with armour threads according to DIN 46320.

Design

- Material Polyamide 6 GF 30
- Colour grey RAL 7001
- black RAL 9005
- other colors available on request



Part-No.	Type	G	SW mm	S mm	weight approx. kg/100 piece	PU piece
GK PG grey RAL 7001						
600430	GK PG 7	PG 7	19	5.0	0.13	100
600431	GK PG 9	PG 9	22	5.0	0.14	100
600432	GK PG 11	PG 11	24	5.0	0.15	100
600433	GK PG 13,5	PG 13.5	27	6.0	0.24	100
600434	GK PG 16	PG 16	30	6.0	0.31	100
600435	GK PG 21	PG 21	36	7.0	0.45	100
600436	GK PG 29	PG 29	46	7.5	0.68	50
600437	GK PG 36	PG 36	60	8.0	1.47	50
600438	GK PG 42	PG 42	65	8.0	1.53	50
600439	GK PG 48	PG 48	70	8.0	1.71	50
GK PG black RAL 9005						
600830	GK SW PG 7	PG 7	19	5.0	0.13	100
600831	GK SW PG 9	PG 9	22	5.0	0.14	100
600832	GK SW PG 11	PG 11	24	5.0	0.15	100
600833	GK SW PG 13,5	PG 13.5	27	6.0	0.24	100
600834	GK SW PG 16	PG 16	30	6.0	0.31	100
600835	GK SW PG 21	PG 21	36	7.0	0.45	100
600836	GK SW PG 29	PG 29	46	7.5	0.68	100
600837	GK SW PG 36	PG 36	60	8.0	1.47	50
600838	GK SW PG 42	PG 42	65	8.0	1.53	50
600839	GK SW PG 48	PG 48	70	8.0	1.71	50

Cable fittings and accessories

Metal accessory GMS




Properties

- Counter nut according to DIN 46320, hexagonal

Design

- Material Brass nickel-plated



Part-No.	Type	G	SW mm	S mm	weight approx. kg/100 piece	PU piece
GMS metric						
600368	GMS M 12 × 1.5	M 12×1.5	15	2.8	0.22	100
600361	GMS M 16 × 1.5	M 16×1.5	19	2.8	0.30	100
600362	GMS M 20 × 1.5	M 20×1.5	24	3.0	0.48	100
600363	GMS M 25 × 1.5	M 25×1.5	30	3.5	0.90	100
600364	GMS M 32 × 1.5	M 32×1.5	36	4.0	1.08	100
600365	GMS M 40 × 1.5	M 40×1.5	46	5.0	2.40	50
600366	GMS M 50 × 1.5	M 50×1.5	60	5.0	3.25	25
600367	GMS M 63 × 1.5	M 60×1.5	70	6.0	4.62	50
GMS PG						
600420	GMS PG 7	PG 7	15	2.8	0.18	100
600421	GMS PG 9	PG 9	18	2.8	0.23	100
600422	GMS PG 11	PG 11	21	3.0	0.30	100
600423	GMS PG 13.5	PG 13.5	23	3.0	0.36	100
600424	GMS PG 16	PG 16	26	3.0	0.50	100
600425	GMS PG 21	PG 21	32	3.5	0.79	100
600426	GMS PG 29	PG 29	41	4.0	1.30	50
600427	GMS PG 36	PG 36	51	5.0	2.10	50
600428	GMS PG 42	PG 42	60	5.0	3.45	25
600429	GMS PG 48	PG 48	64	5.5	3.50	50

Chemical resistance for polyamides

Substance	Resistance
Acetone	+
Ammonia	+
Arsenic acid, aqueous	+
Beer	+
Benzene	+
Benzine	+
Boracic acid, aqueous	O
Borax, aqueous	+
Butane, gaseous	+
Calcium chloride, aqueous	+
Carbon disulphide	+
Carbonic acid	+
Caustic potash solution	+
Caustic soda solution	+
Copper sulphate, aqueous	O
Dextrose, aqueous	+
Diesel oil	+
Ethyl acetate	+
Ethyl alcohol, aqueous	O
Ethyl ether	+
Fatty acids	O
Formic acid, aqueous	-
Fruit juices	+
Glycerine, aqueous	+
Heating oil	+
Hydraulic oils	+
Hydrogen	+
Hydrogen sulphide	+
Iron chloride, aqueous	O
Lactic acid, aqueous	O
Lead acetate, aqueous	O
Methyl acetate	+
Methyl alcohol	+
Methylethylketon	+
Mineral oils	+
Nitric acid, hydrochloric acid, aqueous	-
Nitrol	+
Oils and greases	
- mineral, without additives, at 20° C	+
- ASTM oil No. 1, 20° C	+
- ASTM oil No. 2, 20° C	+

Substance	Resistance
- ASTM oil No. 3, 20° C	+
- animal	+
- vegetable	+
- Transformer oils (pyranols)	+
- silicone-based	+
- Diesel oil	+
- Heating oil	+
- Hydraulic oils on	
- mineral-oil-based	+
- glycol-based	+
- phosphate-ester-based	+
- bore oil	+
- cutting oil	+
Ozone	O
Perchlorethylene	O
Petroleum	+
Phosphoric acid, aqueous	-
Potassium cyanide, aqueous	+
Propane, liquid	+
Saline solution	+
Seawater	+
Silica, aqueous	+
Skydrol	O
Soap solution	+
Sodium chloride	+
Spark erosion liquids	+
Starch, white	+
Stearic acid	+
Sulphuric acid, aqueous	-
Tallow	+
Tartaric acid, aqueous	-
Terpentine	+
Toluene	+
Transformer oil	+
Trichlorethylene	O
Urine	+
Vinegar and acetic acid, aqueous	+
Xylol	+
Zink sulphate, aqueous	O


Explanation of symbols: + = resistant / O = moderately resistant /
- = non-resistant

Properties of the protective pipes based on DIN EN 61 386-1

Code no.	Properties	OL PA	OS PA	OV PA	OR PA
1	Resistance to pressure	>250 N	>350N	>600N	>200N
2	Impact strength	6 J	6 J	6 J	6 J
3	Min. temperature resistance	-40°C	-40°C	-40°C	-50°C
4	Max. temperature resistance	+105°C	+105°C	+105°C	+90°C
5	Resistance to bending	>5000 cycles	>5000 cycles	>5000 cycles	>mio. cycles
6	Electrical characteristics	-	-	-	-
7	Resistance to solid bodies	IP 6X	IP 6X	IP 6X	IP 6X
8	Resistance to penetration by water	IP X6(7)	IP X6(7)	IP X6(7)	IP X6(7)
9	Resistance to corrosion	-	-	-	-
10	Tensile strength	>300N	>300N	>500N	>250N
11	Flame-spreading		Non-flame-spreading		
12	Bearing capacity for hanging loads	-	-	-	-

Cable conduits and conduit fittings

CONDUFLEX CONDUIT CF EL

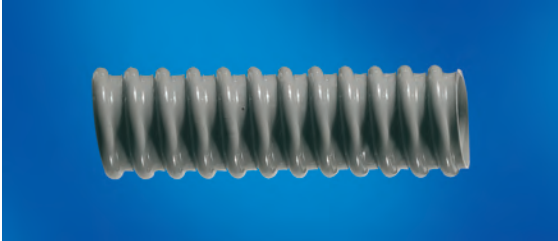

Application

- The smooth inner wall fulfils the requirements in machine and plant construction

Properties

- Cable conduit from soft PVC
- With shrink-wrapped hard PVC spiral
- The hard PVC spiral is integrated into the conduit wall and thus gives the conduit a high degree of flexibility and form stability

Technical data

Smallest bending radius	1.5 × D
Temperature range	-20 °C to +60 °C
Fire performance	according to UL 94 V0

Design

- Colour grey

Part-No.	Type	Outer-∅ mm	Inner-∅ mm	Weight kg/100 m	shipment PU
CF EL grey					
270401	CF 12 EL	16.4	12.0	7.5	30 m
270402	CF 16 EL	20.7	16.0	10.0	30 m
270403	CF 20 EL	25.0	20.0	12.5	30 m
270405	CF 28 EL	33.8	28.0	21.0	30 m
270406	CF 35 EL	41.0	35.0	24.0	30 m

Suitable conduit fitting:
Type CP EL, C EL and CPW

Cable conduits and conduit fittings

CONDUFIX CONDUIT CX PP



Application

- Vehicle and machine construction
- Electric and household appliance industries

Properties

- Two part conduit with circular, concentric and corrugated along the longitudinal axis
- Sealable slotted corrugated conduit, performs like a closed conduit
- Non-damaging and simple insertion of the cable through wide slotting
- Higher mechanical protection of the wires
- Filling degree up to 100% possible
- Emergence of individual conductors prevented even with the tightest bending radiuses
- Fire-protected
- Resistant to: acids, bases, inorganic salts, fuels, mineral oils, greases as well as the most common solvents
- Conditionally resistant to: ether
- Unstable against: halogenated, oxidising and aromatic bonds

Technical data

Smallest bending radius	5.0 × D
Temperature range	-40 °C to +135 °C
Fire performance	according to UL 94 V2 according to FMVSS 302, self-extinguishing

Design

- Colour black
- Material modified polypropylene with fire protection

Part-No.	Type	Outer-∅ mm	Inner-∅ mm	Weight kg/100 m	shipment PU
CX PP black					
271249	CX 12 PP	18.5	12.5	17.2	50 m
271250	CX 24 PP	30.8	23.4	11.8	50 m
271251	CX 31 PP	41.4	31.0	19.0	25 m
271254	CX 44 PP	54.0	42.7	25.0	25 m

Cable conduits and conduit fittings

CONDUFLEX CONDUIT CF NM



Application

- For use as additional isolation of cables and wires for normal operational demands
- For protection against mechanical wear, moisture and contamination

Properties

- PVC protective conduit with smooth inner and outer surface.

Technical data

Smallest bending radius	2 × D
Temperature range	-5 °C to +80 °C
Shore hardness	75 D


Design

- Colour silver-grey

Part-No.	Type	Outer-∅ mm	Inner-∅ mm	Weight kg/100 m	shipment PU
CF NM					
271100	CF 5 NM	7.0	5.0	5.0	50 m
271101	CF 9 NM	11.4	9.0	6.0	50 m
271102	CF 11 NM	14.0	11.0	8.0	50 m
271103	CF 13 NM	16.0	13.0	11.2	50 m
271104	CF 15 NM	19.0	15.0	17.3	50 m
271105	CF 18 NM	21.5	18.0	17.6	50 m
271106	CF 25 NM	31.0	25.0	38.0	50 m
271107	CF 34 NM	40.0	34.0	42.0	50 m

Cable conduits and conduit fittings

CONDUFLEX CONDUIT CF V



Application

- Light up to heavy machine and plant construction
- As additional isolation of cables and wires
- For kinking strains with tight bend radii
- For protection against mechanical wear, moisture and contamination

Properties

- Largely smooth inside and outside. Light and flexible, abrasion-resistant, Ozone-, UV-, cold- and oil-resistant.

Technical data

Temperature range	-20 °C to +60 °C
Protection class	IP 67



Design

- PVC-BUNA hose reinforced with hard PVC coil

Part-No.	NW	d mm	D mm	Minimum bending radius (fixed)	Weight kg/100 m	PU M
grey						
270030	9	9.0	13.0	33	8.5	50
270031	14	14.0	18.6	62	14.0	50
270032	16	16.0	20.6	62	15.0	50
270034	20	20.0	24.8	68	20.5	50
270035	28	28.0	33.2	104	27.5	50
270036	35	35.0	41.0	140	33.5	50
270037	45	45.0	51.4	215	51.0	50
270038	50	50.0	56.6	242	59.0	50
270039	55	55.0	62.0	290	65.0	50

Cable conduits and conduit fittings

CONDUFLEX CONDUIT CF VS

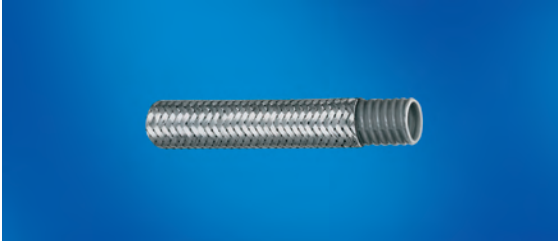

Application

- Light up to heavy machine and plant construction
- As additional isolation of cables and wires
- For kinking strains with tight bend radii
- The outer hot-dip galvanized steel wire braiding makes the hose particularly suitable for protection against hot metal particles, as well as mechanical wear, moisture and contamination.

Properties

- Largely smooth inside and outside. Light and flexible, abrasion-resistant, ozone-, UV-, cold- and oil-resistant.

Technical data

Temperature range	-20 °C to +60 °C
Protection class	IP 67

Design

- PVC-BUNA-hose with hard, reinforced-PVC-coil and with woven hot-dip galvanized steel wire.

Part-No.	NW	d mm	D mm	Minimum bending radius (fixed)	Weight kg/100 m	PU M
270050	9	9.0	14.0	33	16.5	50
270051	14	14.0	19.6	62	24.0	50
270052	16	16.0	21.6	62	27.0	50
270053	20	20.0	25.8	68	34.5	50
270054	28	28.0	34.2	104	28.5	50
270055	35	35.0	42.0	140	91.0	50
270056	45	45.0	52.4	215	105.0	50
270057	50	50.0	57.6	242	124.0	50
270058	55	55.0	63.0	290	183.0	50

Cable conduits and conduit fittings

WELLFLEX CONDUIT WF



Application

- Cabinet construction
- Suction line for gaseous media in the vacuum, ventilation and refrigeration industries.
- In swimming pool construction as well as in medical/chemical plant construction

Properties

- Circular, concentric and corrugated along the longitudinal axis
- High flexibility
- High restoring ability
- Resistant to: weak and organic acids, bases, inorganic salts, amines, alcohols and greases
- Conditionally resistant to: fuels and mineral oils
- Not resistant to: strong acids, halogenated and oxidising connections, ketones, esters
- Smallest bending radius (neutral fibers) for a flattening of the outside $\varnothing \leq 5\%$
- Halogen free

Technical data

Oil resistance	good
Melting point	+90 °C – 100 °C
Temperature range	-40 °C to +55 °C

Design

- Colour grey
- Material Ethylene-vinyl acetate copolymer (EVA)

Part-No.	Type	NW	suitable conduit holder Article number	Outer- \varnothing mm	Inner- \varnothing mm	Smallest bending radius	Weight kg/100 m	shipment PU
WF								
270115	WF 23	23	270125, 272234	28.0	22.5	65	18.0	50 m
270116	WF 29	29	270126, 272235	33.8	28.5	80	28.0	25 m
270117	WF 36	36	270127, 272236	41.7	33.8	105	36.0	25 m
270118	WF 47	48	270128, 272237	53.1	45.0	140	50.0	25 m


Yield stress: DIN 53455; 10–20 N/mm²
 Elongation at break: DIN 53455; 700 – 800 %
 E-Module: DIN 53457; 75 –105 N/mm²
 Impact resistance: DIN 53453; o.Br. mJ/mm²
 Notch impact strength DIN 53453; o-Br. mJ/mm²

Cable conduits and conduit fittings

Plastic conduit holder WFH



- Properties**
- – halogen-free –
 - Conduit holder
- Design**
- Material ABS
 - Colour grey



Part-No.	Type	Matching conduit Article number	Inner- \varnothing mm	d mm	B mm	b mm	H1 mm	H2 mm	weight approx. kg/100 piece	PU piece
WFH										
270125	WFH 23	270115	28.0	5.5	46.0	16.0	20.0	63.0	1.80	20
270126	WFH 29	270116	34.0	5.5	56.0	16.0	20.0	63.0	2.70	20
270127	WFH 36	270117	42.0	5.5	70.0	16.0	26.0	63.0	4.50	20
270128	WFH 47	270118	53.0	5.5	70.0	16.0	26.0	63.0	3.00	20

Cable conduits and conduit fittings

Metal conduit nipple CF WD



Properties


- Conduit nipple brass nickel-plated
- Oil and water proof
- WD hexagonal nut for additional sealing
- O-Ring for sealed connection to enclosure

Technical data

Protection class IP 65

Design

- Material MS 58 Brass nickel-plated

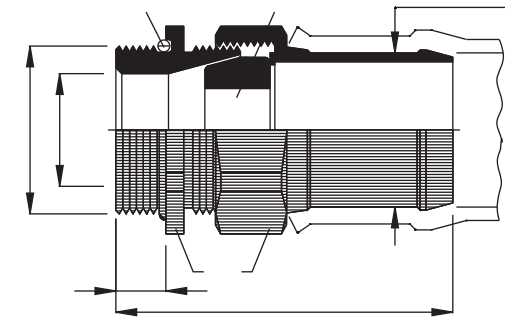

Part-No.	Type	I.D. mm	G	d mm	SW mm	L mm	L 1 mm	weight ap- prox. kg/100 piece	PU piece
CF WD metric									
270281	CF WD M 16 × 1.5	13.0	M 16	11.0	19	34.0	6.0	2.70	50
270283	CF WD M 20 × 1.5	18.0	M 20	16.0	24	43.0	6.5	5.00	50
270285	CF WD M 25 × 1.5	26.0	M 25	23.0	32	55.0	8.0	12.00	50
270286	CF WD M 32 × 1.5	34.0	M 32	30.0	41	63.0	8.0	18.00	25

Cable conduits and conduit fittings

Metal conduit nipple CF



Properties


- Conduit nipple brass nickel-plated
- O-Ring for sealed connection to enclosure

Technical data

Protection class IP 65

Design

- Material MS 58 Brass nickel-plated

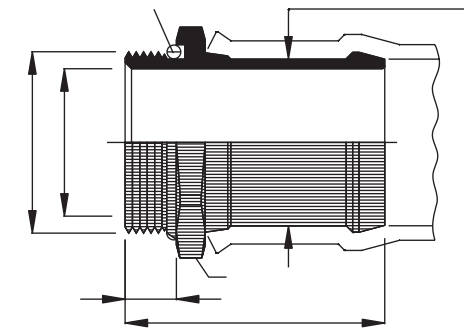

Part-No.	Type	I.D. mm	G	d mm	SW mm	L mm	L 1 mm	weight ap- prox. kg/100 piece	PU piece
CF PG									
270059	CF PG 7	9.0	PG 7	7.0	17	25.0	6.0	1.22	50
270061	CF PG 9	13.0	PG 9	11.0	19	28.0	6.0	1.60	50
270060	CF PG 9/7	9.0	PG 9/7	7.0	19	19.0	6.0	1.57	50
270062	CF PG 11	15.0	PG 11	14.0	22	29.0	6.0	1.85	25
270063	CF PG 13.5	18.0	PG 13.5	16.0	24	34.0	6.5	2.70	25
270064	CF PG 16	18.0	PG 16	17.0	27	36.0	6.5	3.40	25
270065	CF PG 21	25.0	PG 21	23.0	32	41.0	8.5	5.70	25
270066	CF PG 29	34.0	PG 29	30.0	41	41.0	8.5	9.00	1
270067	CF PG 36	45.0	PG 36	38.5	55	60.0	10.0	22.00	1
270068	CF PG 42	50.0	PG 42	44.0	60	65.0	12.0	29.00	1
270069	CF PG 48	55.0	PG 48	49.0	65	70.0	12.0	35.60	1
CF M									
270130	CF M 12	9.0	M 12	7.0	17	25.0	6.0	1.22	50
270131	CF M 16	13.0	M 16	11.0	19	28.0	6.0	1.60	50
270132	CF M 20	18.0	M 20	16.0	24	34.0	6.5	2.70	25
270133	CF M 25	18.0	M 25	17.0	27	36.0	6.5	3.40	25
270134	CF M 32	25.0	M 32	23.0	32	41.0	8.5	5.70	25
270135	CF M 40	34.0	M 40	30.0	41	41.0	8.5	9.00	1
270136	CF M 50	45.0	M 50	38.5	55	60.0	10.0	22.00	1
270137	CF M 63	55.0	M 63	49.0	65	70.0	12.0	35.60	1


Cable conduits and conduit fittings

Metal conduit clamp SL



Properties

- Conduit clamp galvanised steel,
- Self-locking worm screw



Part-No.	Type	Width mm	Clamping range D mm	weight approx. kg/100 piece	PU piece
SL					
270086	SL 15	9.2	10.0 – 16.0	1.00	100
270080	SL 19	9.2	12.0 – 20.0	1.30	100
270081	SL 26	9.2	16.0 – 27.0	1.80	100
270082	SL 32	9.2	20.0 – 32.0	2.00	100
270083	SL 47	9.2	32.0 – 50.0	2.50	100
270084	SL 57	9.2	40.0 – 60.0	2.80	100
270085	SL 70	9.2	50.0 – 70.0	3.50	50

Mounting accessories and tools

Control panel installation




Properties

- The developed snap-fit socket with fully-protected wire connections and integrated snap connection enables a simple and quick installation in the control cabinet.

Part-No.	Type	Description	Nominal voltage range	Number of terminations	Voltage V	Colour	weight approx. kg/100 piece	PU piece
Socket ST-3/S								
680572	ST-3/S GR	Socket ST -3/S	DC 10A / AC 16A	2	250	grey	6.20	10
680576	ST-3/S	Socket ST -3/S	DC 10A / AC 16A	2	250	yellow	6.20	10
Socket ST-3/A								
680571	ST-3/A GR	Socket ST-3/A with switch indicator (green glow lamp)	DC 10A / AC 16A	2	250	grey	6.20	10
Socket ST-3/F								
680573	ST-3/F	Socket ST-3/F French design	DC 10A / AC 16A	2	250	grey	6.30	10
Socket ST-3/US								
680575	ST-3/US	Socket ST-3/US American design with switch indicator (green low lamp)	DC 10A / AC 16A	2	250	grey	6.20	10
Adapter								
680574	ST3/SEV TYP 13	Adapter ST3/SEV Type 13, suitable for ST-3/S, ST-3/A, ST-3/4.	DC 10A / AC 16A	2	250	grey	6.00	1
Socket 2x RJ45								
680500	2x RJ45	Socket 2x RJ45 Cat. 5, snap-fit	DC 10A / AC 16A	2x8		aluminium	15.00	5

Cable conduits and conduit fittings

Cu grounding strap

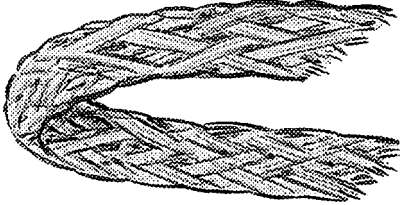

Application

- For use with steel wire encased conduit

Properties

- Copper band for ground



Part-No.	Type	Dimensions mm	weight approx. kg/100 piece	PU piece
Cu grounding strap				
270099	Copper grounding strap 1x2.5	5.8 × 1.0 mm = 2.5 mm ²	2.20	1

Mounting accessories and tools

Cable bundler



Application

Bundling of cables in machines and plant construction, in the electrical industry, cable assembly and in the control cabinet assembly. Besides the bundling, the cable bundle sleeve also provides protection of the cable against mechanical damage. Bundling is easy and fast using the bundling tool.

Technical data

Temperature range	-30 °C to +90 °C
Halogen-free	Yes
UV stability	Yes

Design

- Material Nylon UL 94 V0
- Colour black

Part-No.	Type	bundling range from ... to mm	PU M
680169	SHR-15-V0	10 – 16 mm	50
680170	SHR-20-V0	17 – 21 mm	30
680171	SHR-25-V0	21 – 28 mm	20

Mounting accessories and tools

Cable tie



Application

- Cable ties – fast and simple installation
- For the bundling, binding and attaching of cables, conductors, braids, wires and conduit. **Non-detachable!**

Technical data

Temperature range -10 °C – +85 °C

Design

- Material Polyamide KSN = mold-resistant; KSS = UV-resistant
- Colour natural, black

Part-No.	Type	Colour	Width mm	bundling range to approx. ... mm Ø	weight approx. kg/100 piece	PU piece
cable tie KSN						
680100	KSN 1	natural	2.4	18	0.30	1000
680101	KSN 2	natural	4.5	44	1.00	1000
680102	KSN 3	natural	5.0	102	3.00	1000
Cable tie KSS						
680105	KSS 1	black	2.5	18	0.40	1000
680106	KSS 2	black	5.0	44	1.20	1000
680107	KSS 3	black	5.0	102	5.50	1000
680108	KSS 4	black	2.5	55	0.80	1000

Mounting accessories and tools

Ribbon tie FCM



Application

- Redetachable ribbon tie FCM, self-adhesive or screw-on

Design

- Material Polyamide
- Colour grey

Part-No.	Type	weight approx. kg/100 piece	PU piece
Ribbon tie FCM			
680112	FCM 2	0.11	100
680113	FCM 3	0.17	50

FCM 2: for cable widths up to 2"
FCM 3: for cable widths up to 3"

Mounting accessories and tools

Tools




Application

- Tools for preparing cables

Part-No.	Type	Description	Weight (kg/piece) kg/piece	PU piece
Wire stripper AZ 1				
680018	AZ 1	The cutters in the wire stripper AZ 1 are automatically adjusted to the respective conductor gauge. An adjuster mechanism allows for adapting to different insulation thicknesses and hardnesses. For cable diameters from 0.08 – 1.0 mm²	0.250	1
Wire stripper AZ 2				
680017	AZ	The cutters in the wire stripper AZ 2 are automatically adjusted to the respective conductor gauge. An adjuster mechanism allows for adapting to different insulation thicknesses and hardnesses. For cable diameters from 0.5 – 4.0 mm²	0.150	1
Cable jacket stripper AS 1				
680005	AS 1	For easy stripping and cutting of wires and conduit. Especially suitable for shielded cables and conduit.	0.090	1
Shears GS 85				
680021	GS 85	For trimming of plastic parts. This is the indispensable, lightweight, easy-to-use shears for daily work with the LSC system. Precise trimming of comb profiles KP 300, KP 301, wiring profile LV 78, covers of all sizes KD 50, KD 51, adaptor profile, perforated rubber strips, labelling strips etc. – burr -free – easy, non-tiring work with proven cutting principle.	0.750	1
Cable cutter KS 16				
680020	KS 16	The special blade shape of the cable cutter KS 16 produces a pulling cut and is suitable for wires up to 16 mm outer diameter.	0.130	1
Cable slitting knife KM 1				
680000	KM 1	The ideal knife for removing cable jackets and stripping insulation from multi-strand wires or cables with large cross sections. Automatic conversion of the cutting blade from round to longitudinal cut. Cutting depth of the blade is fully adjustable using the screw in the handle end. Replacement blades in handle. Accessible by loosening the three screws in the handle. Suitable for wires and cables from 8 – 25 mm outer diameter	0.090	1
Special pliers ZSD				
346732	ZSD	Special pliers for the disassembly of EMV shield terminals (Art. No. 330089) for easy and fast shield termination. The removed terminals remain undamaged and can be reinserted!		1
long-nose pliers ZSK				
346733	ZSK	Cables with larger gauges in the cam profiles of the LSC system can only be positioned by removing individual teeth. The long-nose pliers ZSK makes it easy to remove these comb teeth so that the cables with gauges >4mm ² can be positioned easily in the cam profile.		1

Labelling system

Multimark marking collars, halogen-free/Multimark marker

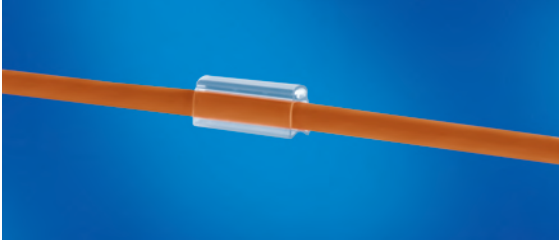



Application

- For the labelling of wires of the most different cable diameters

Part-No.	Length mm	Description	Colour	PU piece
Multimark, marking sleeves, halogen-free				
681110	18.00	The Multimark marking collars serve for the labelling of wires. A collar size for cable diameters 1.8 – 4.0 mm. The labelling is done on the Multimark marker which is inserted into the collar.	transparent	2200
681111	18.00	The Multimark marking collars serve for the labelling of wires. A collar size for cable diameters 3.5 – 8.0 mm. The labelling is done on the Multimark marker which is inserted into the collar.	transparent	1100
681112	18.00	The Multimark marking collars serve for the labelling of wires. A collar size for cable diameters 7.5 – 11.0 mm. The labelling is done on the Multimark marker which is inserted into the collar.	transparent	550
681113	18.00	The Multimark marking collars serve for the labelling of wires. A collar size for cable diameters 8.5 – 17.0 mm. The labelling is done on the Multimark marker which is inserted into the collar.	transparent	550
Multimark, marker				
681014	18.00	The Multimark marker is supplied on endless release paper and can be easily applied to the marking collars through the perforation.	white	6600

Labelling system

Wire and cable marking

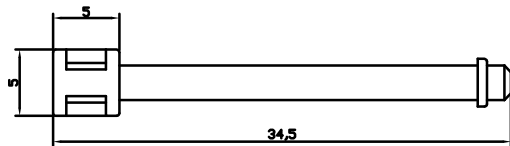

Application

- This versatile system offers you solutions all of your labelling needs for wires and cables.
- The system consists of marker holders, cable ties and symbols. Eight labelling rings can be snapped onto every label holder
- The non-detachable label with the LÜTZE wire and cable marking system is suitable for individual wires and cables with a diameter of 2 mm to approx. 20 mm, and with our cable ties KSS4
- Available as special accessory, up to a diameter of 55 mm

Properties

- The label holder is supplied with cable ties

Part-No.	Type	PU piece
681090	KZT 2	500 pieces/pack.

Labelling system

Wire and cable marking



Application

- Modifications are possible at any time, quickly, easily and without rewiring
- Even labelling closely lying conductors and cables is no problem

Properties

- The labelling rings are made of soft plastic with indelible black deep embossing

Part-No.	Type	PU piece
Labelling ring for wires with a diameter of 1.9 to 2.65 mm		
681300	KR 03 0	300 Markers on 10 rods per package
681301	KR 03 1	300 Markers on 10 rods per package
681302	KR 03 2	300 Markers on 10 rods per package
681303	KR 03 3	300 Markers on 10 rods per package
681304	KR 03 4	300 Markers on 10 rods per package
681305	KR 03 5	300 Markers on 10 rods per package
681306	KR 03 6	300 Markers on 10 rods per package
681307	KR 03 7	300 Markers on 10 rods per package
681308	KR 03 8	300 Markers on 10 rods per package
681309	KR 03 9	300 Markers on 10 rods per package
681336	KR 03 +	300 Markers on 10 rods per package
681337	KR 03 -	300 Markers on 10 rods per package
681338	KR 03 /	300 Markers on 10 rods per package
681339	KR 03 ÷	300 Markers on 10 rods per package
681330	KR 03 U	300 Markers on 10 rods per package
681331	KR 03 V	300 Markers on 10 rods per package
681332	KR 03 W	300 Markers on 10 rods per package
681323	KR 03 N	300 Markers on 10 rods per package
Labelling ring for the label holder and conductors with a diameter from 2.6 to 3.5 mm		
681400	KR 06 0	300 Markers on 10 rods per package
681401	KR 06 1	300 Markers on 10 rods per package
681402	KR 06 2	300 Markers on 10 rods per package
681403	KR 06 3	300 Markers on 10 rods per package
681404	KR 06 4	300 Markers on 10 rods per package
681405	KR 06 5	300 Markers on 10 rods per package
681406	KR 06 6	300 Markers on 10 rods per package
681407	KR 06 7	300 Markers on 10 rods per package
681408	KR 06 8	300 Markers on 10 rods per package
681409	KR 06 9	300 Markers on 10 rods per package
681410	KR 06 A	300 Markers on 10 rods per package
681411	KR 06 B	300 Markers on 10 rods per package
681412	KR 06 C	300 Markers on 10 rods per package
681413	KR 06 D	300 Markers on 10 rods per package
681414	KR 06 E	300 Markers on 10 rods per package
681415	KR 06 F	300 Markers on 10 rods per package
681416	KR 06 G	300 Markers on 10 rods per package
681417	KR 06 H	300 Markers on 10 rods per package
681418	KR 06 I	300 Markers on 10 rods per package
681419	KR 06 J	300 Markers on 10 rods per package
681420	KR 06 K	300 Markers on 10 rods per package
681421	KR 06 L	300 Markers on 10 rods per package
681422	KR 06 M	300 Markers on 10 rods per package
681423	KR 06 N	300 Markers on 10 rods per package
681425	KR 06 P	300 Markers on 10 rods per package
681426	KR 06 Q	300 Markers on 10 rods per package
681427	KR 06 R	300 Markers on 10 rods per package
681428	KR 06 S	300 Markers on 10 rods per package
681429	KR 06 T	300 Markers on 10 rods per package
681430	KR 06 U	300 Markers on 10 rods per package
681431	KR 06 V	300 Markers on 10 rods per package
681432	KR 06 W	300 Markers on 10 rods per package
681433	KR 06 X	300 Markers on 10 rods per package
681434	KR 06 Y	300 Markers on 10 rods per package
681435	KR 06 Z	300 Markers on 10 rods per package
681436	KR 06 +	300 Markers on 10 rods per package
681437	KR 06 -	300 Markers on 10 rods per package
681438	KR 06 /	300 Markers on 10 rods per package
681439	KR 06 ÷	300 Markers on 10 rods per package
681441	KR 06 :	300 Markers on 10 rods per package

Labelling system

Wire and cable marking



Application

- Modifications are possible at any time, quickly, easily and without rewiring
- Even labelling closely lying conductors and cables is no problem

Properties

- The labelling rings are made of soft plastic with indelible black deep embossing

Part-No.	Type	PU piece
Labelling ring for wires with a diameter of 3.25 to 4.5 mm		
681500	KR 09 0	300 Markers on 10 rods per package
681501	KR 09 1	300 Markers on 10 rods per package
681502	KR 09 2	300 Markers on 10 rods per package
681503	KR 09 3	300 Markers on 10 rods per package
681504	KR 09 4	300 Markers on 10 rods per package
681505	KR 09 5	300 Markers on 10 rods per package
681506	KR 09 6	300 Markers on 10 rods per package
681507	KR 09 7	300 Markers on 10 rods per package
681508	KR 09 8	300 Markers on 10 rods per package
681509	KR 09 0	300 Markers on 10 rods per package
681536	KR 09 +	300 Markers on 10 rods per package
681537	KR 09 -	300 Markers on 10 rods per package
681538	KR 09 /	300 Markers on 10 rods per package
681539	KR 09 ≡	300 Markers on 10 rods per package
681530	KR 09 U	300 Markers on 10 rods per package
681531	KR 09 V	300 Markers on 10 rods per package
681532	KR 09 W	300 Markers on 10 rods per package
681523	KR 09 N	300 Markers on 10 rods per package


Labelling system

Rail for marker holders/marker holder



Properties


- System for manual labelling



Part-No.	Type	Description	Dimensions mm	PU piece
rail for marker holders BTS				
681314	BTS 301	<p>The rail for marker holders BTS serve as non-detachable marking of the devices.</p> <p>The markers lock in place in the rail for marker holders and are exchangeable. To attach the BTS, peel off the protective foil from the underside adhesive side of the BTS and press on firmly</p> <p>Material: Hard PVC</p> <p>Colour: grey</p> <p>Burning behaviour: UL-94 V2</p> <p>Rail for marker holders for the marker holder BZT 0920</p> <p>Examples from our product range:</p> <p>Rail for marker holders Part-No. 330 035</p> <p>Rail for marker holders Part-No. 681 314</p> <p>MICROCOMPACT</p> <p>Valve plug</p> <p>DIOFACE</p> <p>DIOPLEX</p> <p>Actuator sensor boxes</p>	10x1000 (WxL)	1
Marker holder BZT				
681311	BZT 0720	Suitable for our MICROCOMPACT modules Type series 12.5 mm and Siemens control unit SIRIUS 3 R.	7x20 (WxL)	100
681312	BZT 0420	Suitable for our MICROCOMPACT modules Model range 6.2 mm 4-pole enclosure and Siemens interstage networks 3TX7 004/5- M... and Siemens interstage networks 3TX7 004/5- AB04	4x20 (WxL)	100
681313	BZT 0411	Suitable for our MICROCOMPACT modules Model range 6.2 mm 5-pole enclosure and Siemens interstage networks 3TX7 004/5- 1L...	4x11 (WxL)	100
681315	BZT 0920	Suitable for all devices with standardised marker holders. (Siemens control units and many more)	9x20 (WxL)	100

Labelling system

Identification of hook-up wires and cables



Technical data

Stability

UV-stable and non-yellowing


Design

- Material Polypropylene
- Covering cap: Polystyrene

Part-No.	Type	Description	Dimensions mm	weight approx. kg/100 piece	PU piece
Clip markers CS 1/CS 2					
680418	CS 1	For labelling of devices and supply cables after the wiring. Termination area 0.75 to 4.0 mm clip-on markers are supplied with labelling sheets. Labelling sheets for laser printer see system for laser printer labelling.	28 x 11	0.10	500
680419	CS 2	For labelling of devices and supply cables after the wiring. Termination area 0.75 to 4.0 mm clip-on markers are supplied with labelling sheets. Labelling sheets for laser printer see system for laser printer labelling.	39 x 15.5	0.30	500
Cable marker KS 1					
681310	KS 1	The cable marker KS 1 is designed for the labelling of cables, wires and conduits, pipes etc. in raw, moist and dusty environments. The label with the information is embedded in the cable marker and thus fully protected. The marker is attached using cable ties. (not included in the scope of delivery, when ordering the cable tie, selected the appropriate size.) Cable markers are supplied with labelling sheets. Labelling sheets for laser printer see system for laser printer labelling.	34 x 16	0.30	500
Plug-in marker SS 2					
680424	SS 2	For the labelling of devices on the mounting panel. Hole 4 mm. Pressing in of the plug-in marker. Securely locked in by plastic lugs. Plug-in markers are supplied with labelling sheets. labelling sheets see system for laser printer labelling.	32 x 12	0.30	500
Labels on sheets, endless form					
680428	BS-CS 1	Labelling sheet for CS 1	20.5 x 9.0		360
680429	BS-CS 2	Labelling sheet for CS 2	30.3 x 12.8		168

Labelling system

Laser labels



Application

- For the printing with laser printer
- The high-contrast printing and the high resolution of laser printers set quality standards
- The available border and the appropriate row and column spacing enable the optimal utilisation of the entire labelling field of the self-adhesive labels
- Very high resistance to external influences and very high ageing resistance of the printed image.


Design

- Material Polyester white matt
- Dimension 0.05 mm

Part-No.	Type	Description	Dimensions mm	Label/Sheet
Laser labels				
681316	BSL-CS 1	Labels for clip on markers CS 1	8.5 × 20	270
681318	BSL-SS 2	Labels for identification of hook-up wires and cables CS 2, SS 2 and KS 1.	12 × 29	138
Self-adhesive laser labels				
681032	LEB 0920 PW	Labels suitable for: marker holder BZT 0920 MINICOMPACT DIOFACE valve plug all devices with standard marker	9 × 20	270
681033	LEB 0615 PW	Labels suitable for: marker holder BZT 0720 MINICOMPACT modules 12.5 mm Actuator sensor boxes DIOPLEX	6.35 × 15.24	528
681034	LEB 0415 PW	Labels suitable for: marker holder BZT 0411 MICROCOMPACT modules 6.2 mm	4.23 × 15.24	792

Labelling system

Marker strips

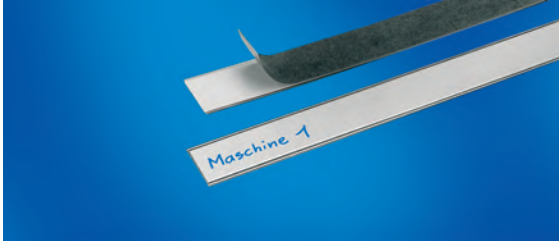


Application

- Marker strips flexible and self-adhesive
- For the labelling of cable channels, control panels, operator panels . .
- The labelled inserts are protected by a transparent film
- Transparent hard film with exchangeable case strips for self-labelling
- Can be cut to any desired length
- Film and labelling strips are supplied separately

Part-No.	Type	Description	PU piece
Marker strip BS			
680420	BS	Width x Length: 21.5 mm x 1000 mm max. Labelling surface area: 18.0 mm x 1000 mm	10

Labelling system

Cable marker

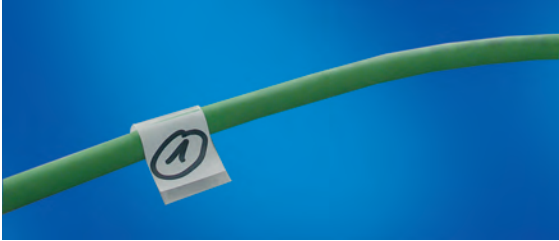

Application

- For on-site hand-written labelling
- Blocked in handy sizes

Properties

- Permanent adhesive strength
- Resistant to dirt, water, alcohol, petroleum-based oils
- Labelling field white

Technical data

Temperature range -30 °C to +120 °C

Design

- Material PVC transparent
- Dimension 25 x 25 mm

Part-No.	Type	Description	Dimensions mm	PU piece
Cable marker TKM				
681001	TKM 75	f. Cable diameter max. 14 mm	75 x 25	60 marker
681002	TKM 150	f. Cable diameter max. 38 mm	150 x 25	60 marker

Labelling system

Wire markers LKZ



Application


- For labelling of rails, connections or equipment
- For labelling of systems and devices

Design

- Material self-adhering PVC foil with lamination 0.10 mm strong

Part-No.	Type	Description	Diameter mm	Page length mm
Wire markers LKZ				
681011	LKZ 12.B4	Earth: 1 card with 10 LKZ stickers	12.5	
681019	LKZ 12 B6	Earth marking: 1 card with 10 LKZ stickers	12.5	
681018	LKZ 12.PE	Ground conductor: 1 card with 10 LKZ stickers	12.5	
681017	LKZ 12.N	Neutral conductor: 1 card with 10 LKZ stickers	12.5	
Safety sign ESSW				
681008	ESSW 1025	10 markers/card		25
681009	ESSW 1050	2 markers/card		50
681010	ESSW 1100	2 markers/card		100
681012	ESSW 1200	1 shield/card		200

11. EMC accessories

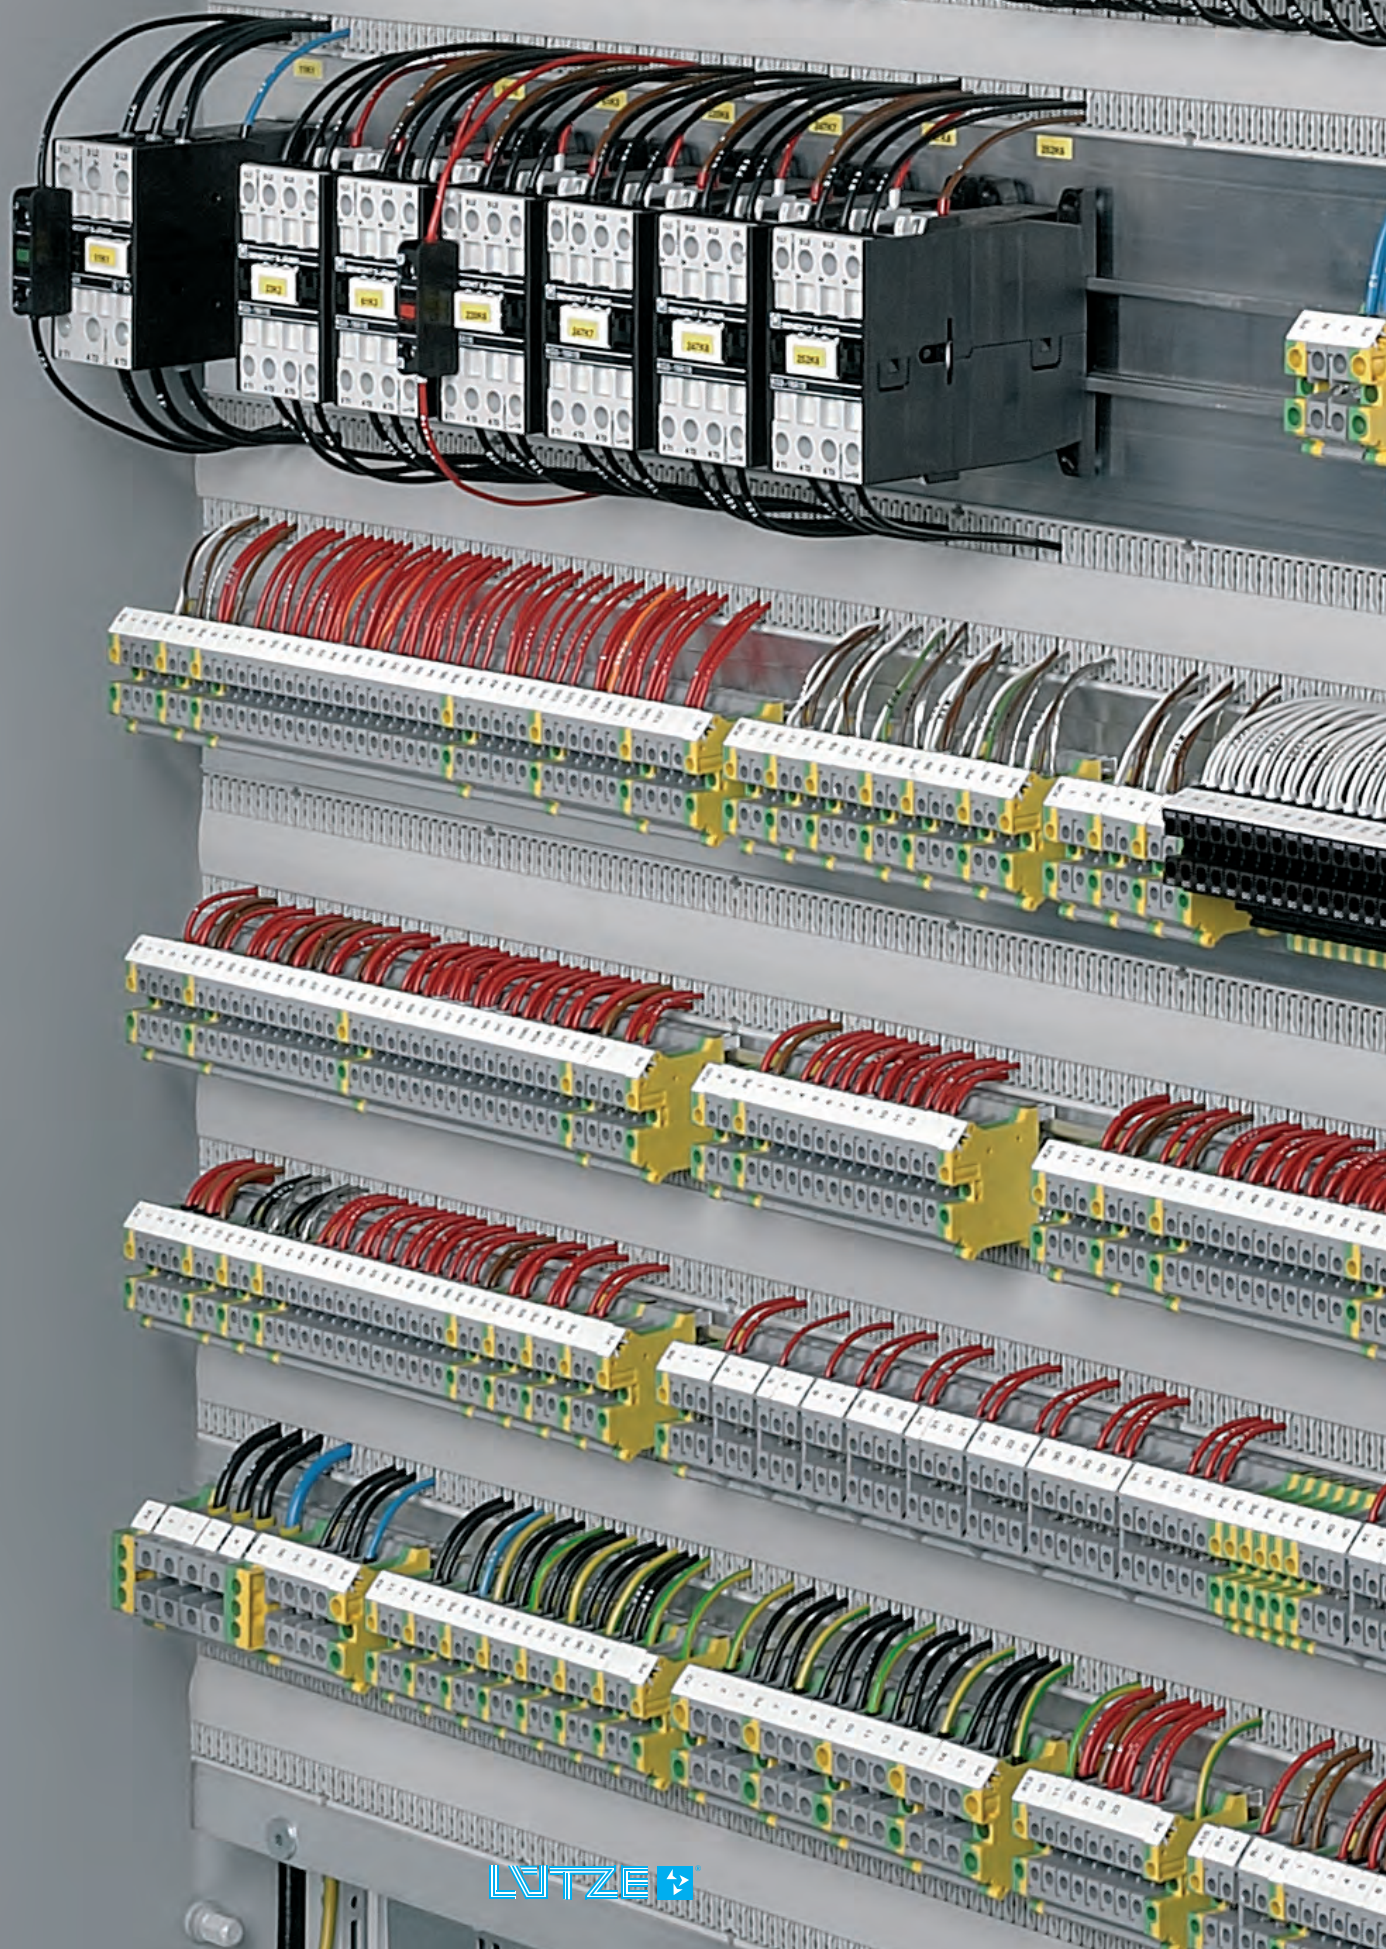

EMC accessories



Shield rails



screen element



Flat-earthing



Cable clips

Shield rails

Article-No.	cut to length	Bracket (option)	Number of shield points	Fixing M5	Mounting hole free selectable	Cable stand	Fixing on top-hat rail	Bracket 346814.0010	Bracket 346860.0002	Page
346812	●	●	46		●	●			●	10.60
346813	●	●	55	●				●		10.60
330088.0010			1				●			10.60

Screen elements

Article-No.	snap-on element	Flexible	Cable diameter 0-12 mm	Cable diameter 12-20 mm	Cable diameter 20-30 mm	Cable diameter 30-50 mm	Spring steel	Page
330089	●	●	●				●	10.60
330071	●	●		●			●	10.60
330072	●	●			●		●	10.60
330073	●	●				●	●	10.60

Flat-earthing

Article-No.	Conductor 0,15 mm ²	Pressed ends	Mounting hole 6,5 mm	Mounting hole 8,5 mm	Width 12 mm (10 mm ²)	Width 15 mm (15 mm ²)	Width 23 mm (25 mm ²)	Length 100 mm	Length 200 mm	Length 300 mm	Length 500 mm	Page
346109.0010	●	●	●		●					●		10.60
346110.0010	●	●		●		●				●		10.60
346111.0010	●	●		●			●			●		10.60
346112.0010	●	●	●		●			●				10.60
346113.0010	●	●		●		●			●			10.60
346114.0010	●	●		●		●					●	10.60
346116.0010	●	●		●			●		●			10.60
346123.0010	●	●	●		●			●				10.60


Cable clips

Article-No.	Suitable for C rail	Tub + counter tub plastics	for Diameter 8-12 mm	for Diameter 12-16 mm	for Diameter 16-22 mm	for Diameter 34-40 mm	for Diameter 52-58 mm	Page
331000	●	●	●					10.60
331001	●	●		●				10.60
331002	●	●			●			10.60
331003	●	●				●		10.60
331004	●	●					●	10.60



EMC accessories

EMC shield rail

EMC shield rail with cable clamping options for a wide variety of shield clamps



Dimensions

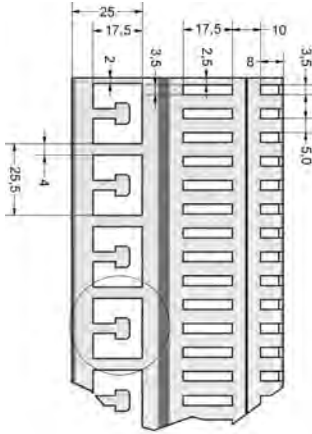

Description	Part-No.	Type	PU
EMC shield rail	346812	EMVS 03-46812	1

Technical data		346812	
Number of shield points		46	
Length		1173.00 mm	
Height		75.0 mm	
Width		21.5 mm	
Weight (kg/piece)		1.169	

General	
Material	ST37-2-G
Surface	burr-free
Colour	Sendzimir galvanised 20-25 µm
Storage temperature range	-30 °C – 90 °C
Operation temperature range	-5 °C – 80 °C

usable shield clamps	for cable Ø mm	Type	Article number	PU
Shield clamp	0–12	EMVSK 12	330089	100
spring shield clamp	12–20	EMVFSK 1	330071	50
spring shield clamp	20–30	EMVFSK 2	330072	50
spring shield clamp	30–50	EMVFSK 3	330073	50
Metal tie wrap	250 mm length	KSE	330060	50
as clamping option	for cable Ø mm	Type	Article number	PU
Cable clamp	8–12	KS 0	331000	25
Cable clamp	12–16	KS 1	331001	25
Cable clamp	16–22	KS 2	331002	25
Cable clamp	34–40	KS 3	331003	25
Cable clamp	52–58	KS 4	331004	25

Comments

Mounting hole, diam. 8.5 mm, is made by the user.

Shield rails are mounted via spacing rollers DR 20x18/8.5 Article no. 330930.0100

possible screw M8x30, Article no. 331050.0100



EMC accessories

Mounting bracket

Mounting bracket for fastening the EMC rail in the control cabinet



Dimensions

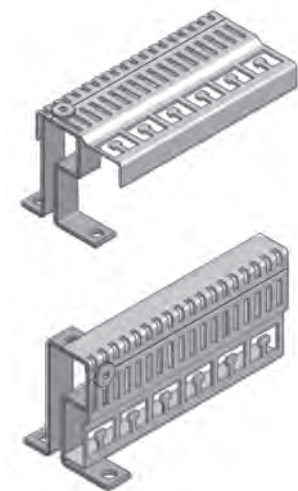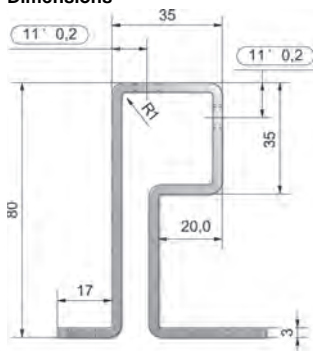


Description	Part-No.	Type	PU
Mounting bracket	346860.0002	HW-EMVS 03	2
Technical data			
	346860.0002		
Dimensions (w x h x d)	18.0 x 80.0 x 65.0 mm		
Material thickness	3 mm		
Thread	2xM8		
Hole diameter	2x 8.5 mm		
Weight (kg/100 pcs.)	9.800		
General			
Material	S235JR (ST37-2)		
Surface	smooth		
Colour	Punched edges bare/bright galvanised		
Storage temperature range	-30 °C – 90 °C		
Operation temperature range	-5 °C – 80 °C		

Comments
suitable for shield rail 346813


EMC accessories

EMC shield rail

EMC shield rail with cable clamping options for a wide variety of shield clamps



Dimensions

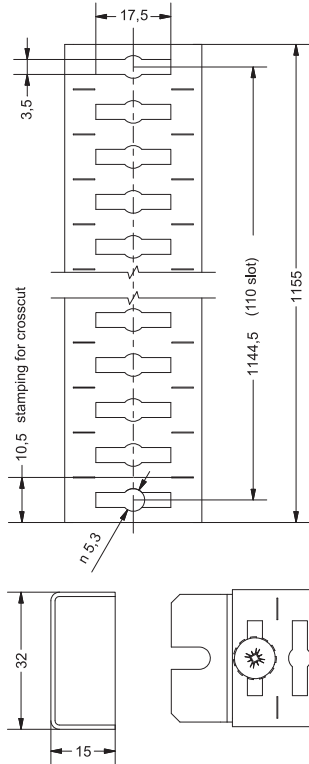


Description	Part-No.	Type	PU
EMC shield rail	346813	EMVS 04-55813	1
Technical data		346813	
Number of shield points		max. 55	
Dimensions (w x h x d)		32.0 x 15.0 x 1155.0 mm	
Weight (kg/100 pcs.)		0.466	
Hole diameter		5.3 mm	
General			
Material		Sheet steel	
Surface		galvanised	
Colour		Punched edges bare/natural	
Storage temperature range		-30 °C – 90 °C	
Operation temperature range		-5 °C – 80 °C	
Accessories		Article number	Type
Bracket	346814.0010	HW EMVS-04	10


EMC accessories

Bracket

Retaining bracket for fastening the EMC rail



Dimensions



Description	Part-No.	Type	PU
Bracket			
	346814.0010	HW-EMVS 04	10
Technical data			
	346814.0010		
Dimensions (w x h x d)	29.8 x 14.0 x 24.0 mm		
Material thickness	1.5 mm		
Thread	M5		
Hole diameter	-		
Weight (kg/100 pcs.)	0.800		
General			
Material	V2A		
Surface	smooth		
Colour	Punched edges bare/natural		
Storage temperature range	-30 °C – 90 °C		
Operation temperature range	-5 °C – 80 °C		

Comments
suitable for shield rail 346813


EMC accessories

Spring shield clamp Shield connection for large-diameter cables




Description	Part-No.	Type	PU
Spring shield clamp			
	330071	EMVFSK 1	50
	330072	EMVFSK 2	50
	330073	EMVFSK 3	50
Technical data	330071	330072	330073
For cable diameter	12 – 20 mm	20 – 30 mm	30 – 50 mm
Length	42.00 mm	55.00 mm	74.00 mm
Weight (kg/100 pcs.)	0.300	0.500	0.700
Tensile strength (N/mm ²)		1000–1200	
General			
Material	Sheet steel 1.4310		
Colour	bare/stainless		
Operation temperature range	0 °C – 60 °C		

Dimensions

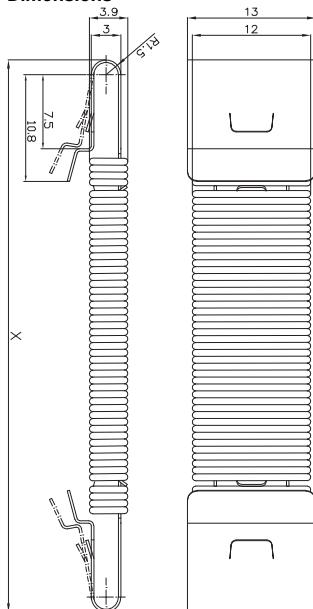

EMC accessories

Snap-on element for snapping onto hat rail for attaching a screening clamp




Description	Part-No.	Type	PU
Snap-on element			
Length	18.00 mm	330088	EMVRE H 1
Technical data			
		330088	
Weight (kg/100 pcs.)	0.700		
General			
Material	Spring steel		
Colour	bare/stainless		
Operation temperature range	-20 °C – 60 °C		

Comments
Suitable for all crosspieces and hat profile TS35


Application example

Dimensions





EMC accessories

Snap-on element can be snapped onto LSC profiles



Description	Part-No.	Type	PU	
Snap-on element				
Length	24.00 mm	330074	EMVRE 1	10
	43.50 mm	330068	EMVRE 2	10
Technical data				
	330074	330068		
Weight (kg/100 pcs.)	0.900	1.800		
General				
Material	Sheet steel 1.4310			
Colour	bare/stainless			
Operation temperature range	0 °C – 60 °C			
Comments				
suitable for all webs of the series M, S, SN, MF, F, A				

Dimensions

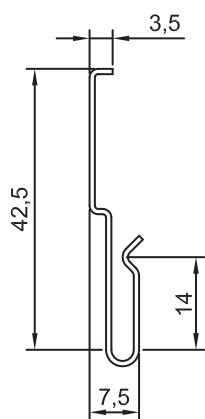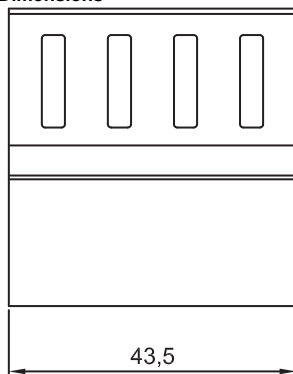


EMC accessories

Earthing strip, copper braiding, tin-plated Single wire Cu ETP UNI 5649-71, similar to DIN 72333



Dimensions

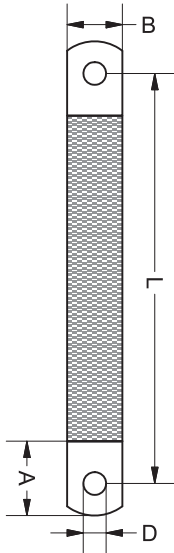

Description	Part-No.	Type	PU	
both ends drilled, cold pressed				
Gauge	10	346123.0010	EMVMB 10/100/6	10
	10	346112.0010	EMVMB 10/200/6	10
	16	346113.0010	EMVMB 16/200/8	10
	25	346116.0010	EMVMB 25/200/8	10

Technical data	346123.0010	346112.0010	346113.0010	346116.0010
Wire conductors	0.15 mm ²			
D	6.5 mm		8.5 mm	
A	22.0 mm		25.0 mm	
B	12.0 mm		15.0 mm	23.0 mm
Weight (kg/m)	0.100		0.160	0.250
Approvals	UL E220029			
L	100.0 mm		200.0 mm	

General	
Amperage range	see standards table (e.g. EN 60204)
Cable construction	individual strands braided; cross-section rectangular
Storage temperature range	-30 °C – 90 °C
Operation temperature range	5 °C – 105 °C


Accessories	Article number	Type	PU
Earthing set	331805	ES 8	1
Earthing set	331816	ES 6	1

Comments
D= hole diameter
A= sleeve length
B= width
L= distance of hole


Other lengths are available on request

EMC accessories

Earthing strip, copper braiding, tin-plated Single wire Cu ETP UNI 5649-71, similar to DIN 72333



Dimensions

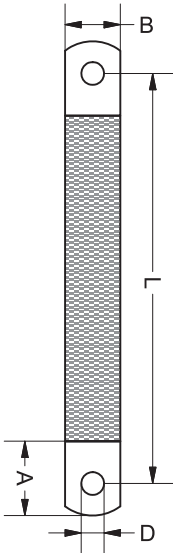

Description	Part-No.	Type	PU	
both ends drilled, cold pressed				
Gauge	10	346109.0010	EMVMB 10/300/6	10
	16	346110.0010	EMVMB 16/300/8	10
	25	346111.0010	EMVMB 25/300/10	10
	16	346114.0010	EMVMB 16/500/8	10

Technical data	346109.0010	346110.0010	346111.0010	346114.0010
Wire conductors	0.15 mm ²			
D	6.5 mm	8.5 mm		
A	22.0 mm	25.0 mm		
B	12.0 mm	15.0 mm	23.0 mm	15.0 mm
Weight (kg/m)	0.100	0.160	0.250	0.160
Approvals	UL E220029			
L	300.0 mm		500.0 mm	

General	
Amperage range	see standards table (e.g. EN 60204)
Cable construction	individual strands braided; cross-section rectangular
Storage temperature range	-30 °C – 90 °C
Operation temperature range	5 °C – 105 °C

Accessories	Article number	Type	PU
Earthing set	331805	ES 8	1
Earthing set	331816	ES 6	1

Comments
D= hole diameter
A= sleeve length
B= width
L= distance of hole


Other lengths are available on request

EMC accessories

Cable clip



Dimensions

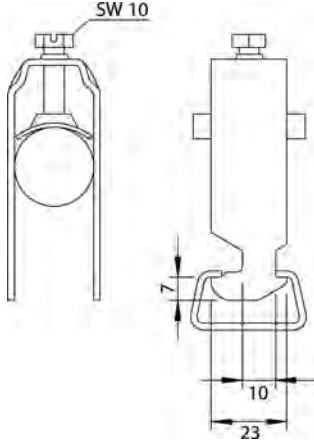

Description	Part-No.	Type	PU
Cable clip			
	331000	KS 0	10
	331001	KS 1	10
	331002	KS 2	10
	331003	KS 3	10
	331004	KS 4	10

Technical data	331000	331001	331002	331003	331004
Weight (kg/100 pcs.)	3.000	3.200	3.500	6.800	6.000
Thread	M6			M8	

General			
Material	Steel		
Colour	galvanised		
Operation temperature range	0 °C – 60 °C		
Hexagon screw	slotted		

Accessories	Article number	Type	PU
can be used on Lütze rails	345812	EMVS 03	
can be used on Lütze rails	345813	EMVS 04	
can be used on Lütze rails	333156	C rail	


Comments
Sold only with counter-shell, polypropylene plastic

12. C-tracks



Energy Supply Chains • General

Applications of LÜTZE energy supply chains

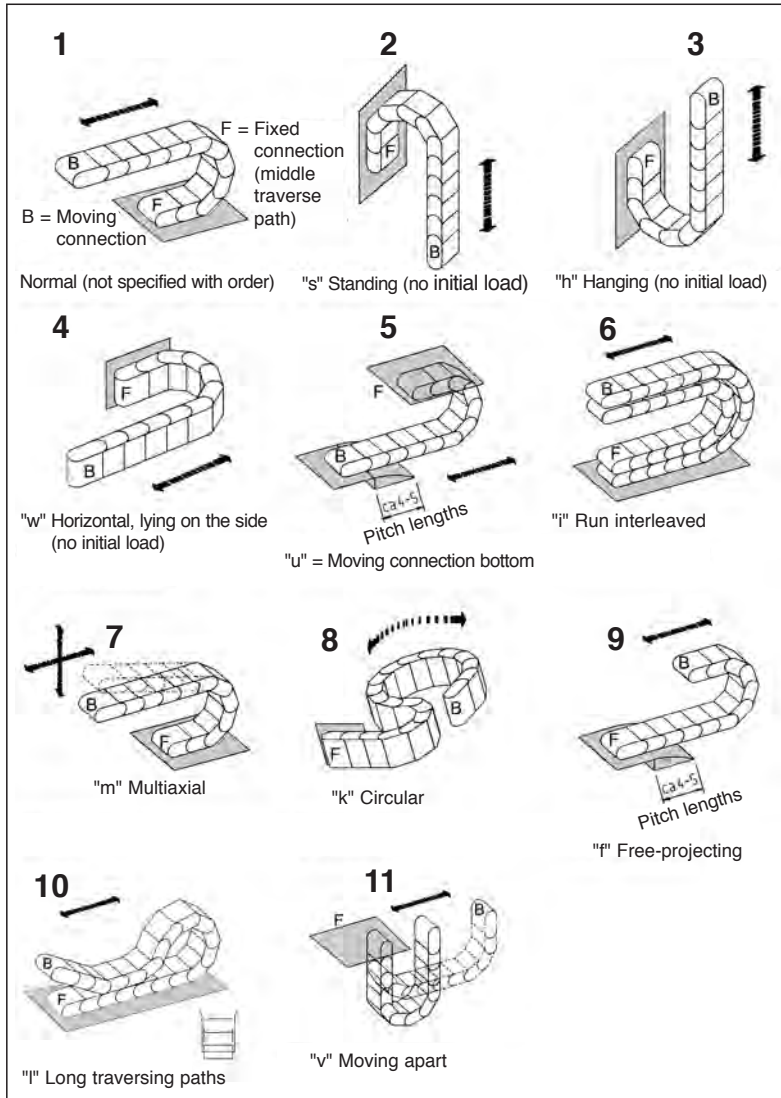

Travel distance

The maximum travel distance is determined by the arrangement and the additional weight (line weight). At normal arrangements the maximum travel distance is double the self-supporting length. Support rollers or similar constructive steps can increase this value. In gliding arrangement (depending on application), travel distances up to 100 m are possible. Additional constructive measures are also required.

Travel speed

There are no limits for the travel speed in general. With sliding arrangement, specific application influences must be taken into consideration.

Acceleration

There are no limits for the acceleration in general. Limits may occur through the tensile stresses at high line weights.

Drawing aids

For CAD users, we provide schematic diagrams of our products in different file formats which can be inserted into existing drawings.

You can find the **system form for LÜTZE SUPERFLEX® chains and cables at the back of the catalogue**

Fields of application

Inside height	7	30	205	300	(1000)	Inside width (mm)
118						
115						
80						
50						
30						
16						
7						

KL model series
inexpensive, stable
max. 6 m self-supporting


KK model series
inexpensive, universal
max. 5 m self-supporting

KM model series
inexpensive
lightweight
max. 3 m self-supporting

Model series SL
massive,
max. 10 m self-supporting

KM series

Plastic mono-chain, KM model series

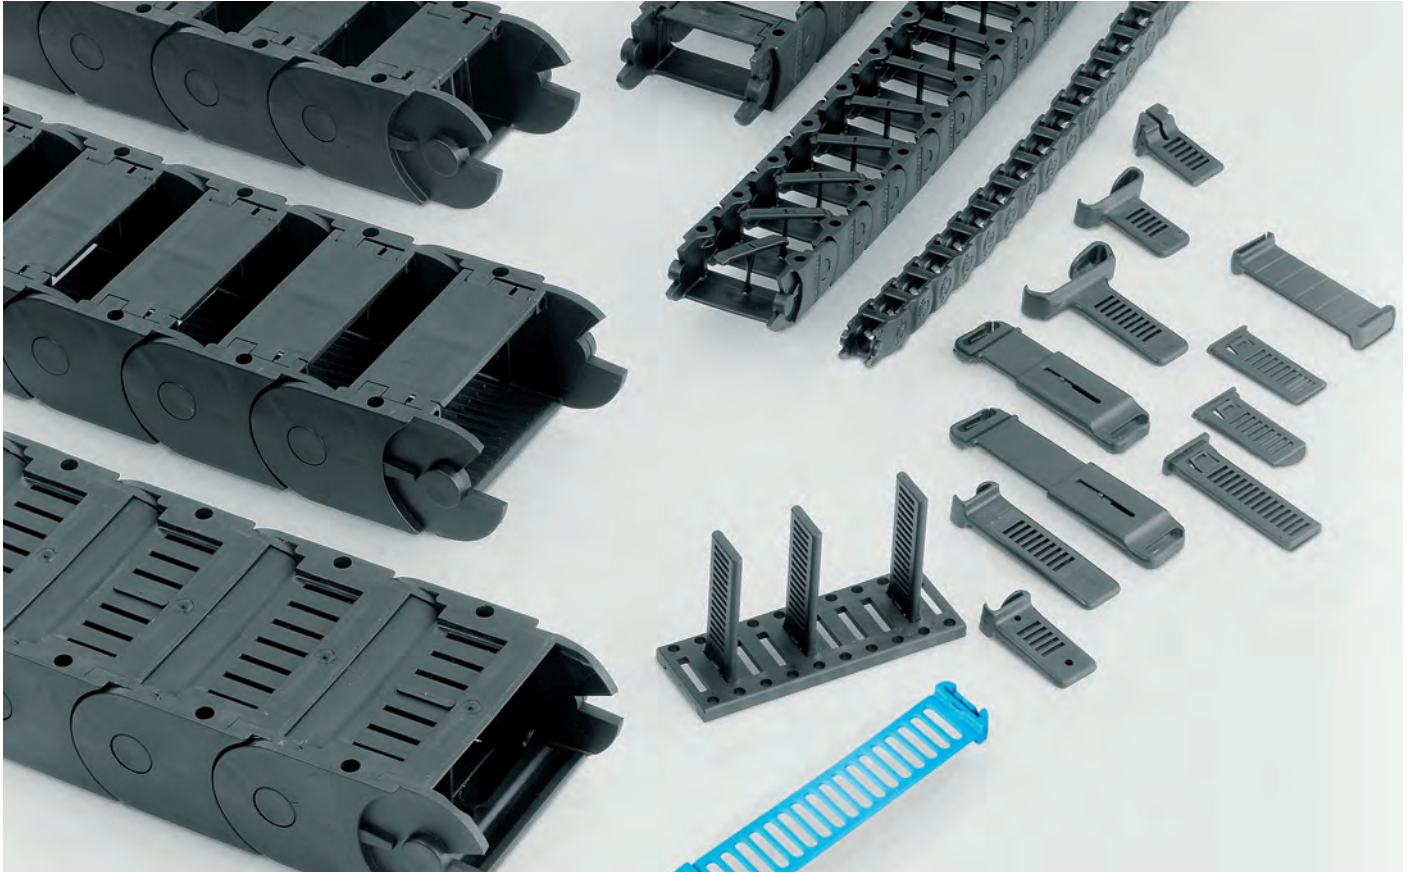


The advantages at a glance:

The inexpensive energy chain for lightweight machine construction. The patented opening mechanism delivers both extremely high torsional resistance and comfortable opening.

- Plastic energy chains with permanent chain widths
A wide range of radii and cross-sections can cover practically all application requirements
- Each chain section can be used as a connection flange, additional connection parts are not required. The fastening dimensions are identical for both ends of the chain
- Fast and efficient installation
- Reduced storage space required
- Buckling of chains prevented as the connection intersection is highly resistant to mechanical stresses
- Folding cross bars accessible on both sides make it easier to insert cables
- Division of installation cross-section into separators, clip-in and connection cross bars possible, can be retrofitted
- All plastic mono-chains from the KM model series are equipped with integrated plastic connections. Additional parts are not required for fastening the energy chains
- Simple connection of cables thanks to folding cross bars that can be accessible from both sides
- Variable division with clip-in cross bars
- Clip-in cross bars can be retrofitted


Stress diagram

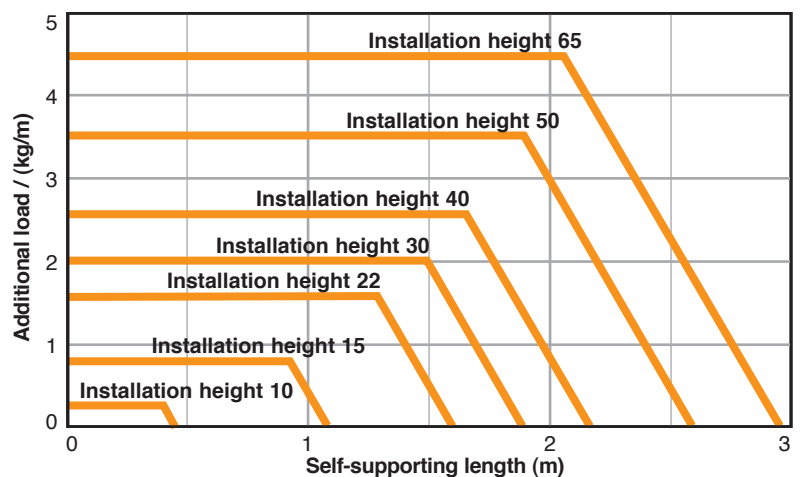

Dimensions	mm	kg/m
Bending radius	15 - 300	
Inside height	7 - 50	
Inside width	7 - 205	
Energy chain weight		0,06 - 2,7
Operating temperature	°C	
		-20 - 100

KK series

Plastic mono-chain, KK model series

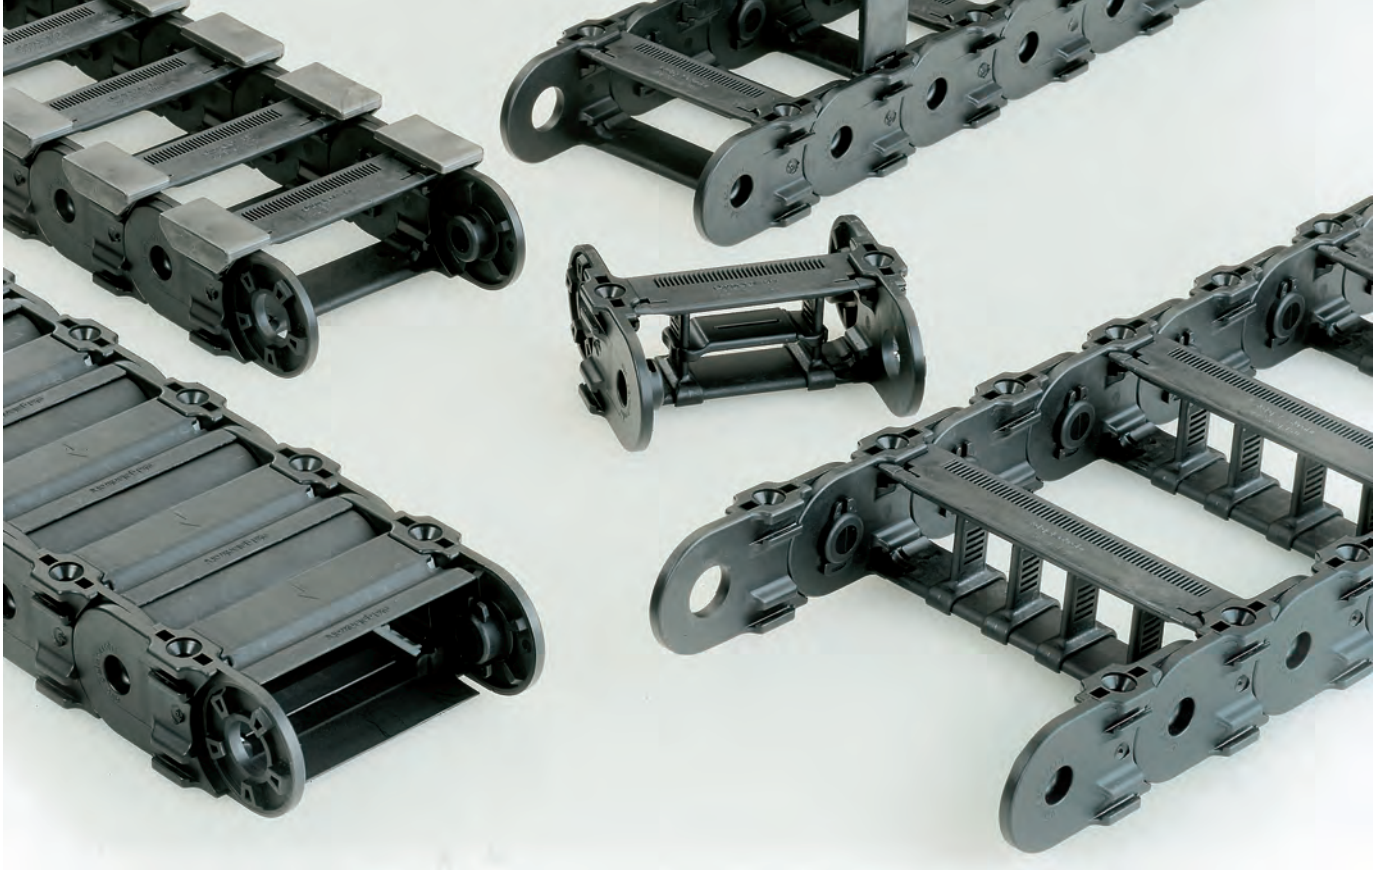


The advantages at a glance:

A development from years of experience which combines all the advantages of plastic energy chains into one system:

- Stable energy chain with large self-supporting lengths
- A wide range of variation options with cross bar lengths between 30 and 300 mm
- Open, closed and multi-strand chains
- The mounting cross bar offers additional connection options in inside or outside radius.
- Travel distances >100 m can be achieved without any problem.
- Acceleration: 5 adjustable stops on the joints of the chain plate allow maximum acceleration
- To open in inside and outside radius
- Fast assembly without tools possible
- All-round protection by closed design
- Connection: no separate fastening element required since connection integrated in every chain section
- Sliders to cover large distances
- Flush cross bar locking mechanism

Stress diagram

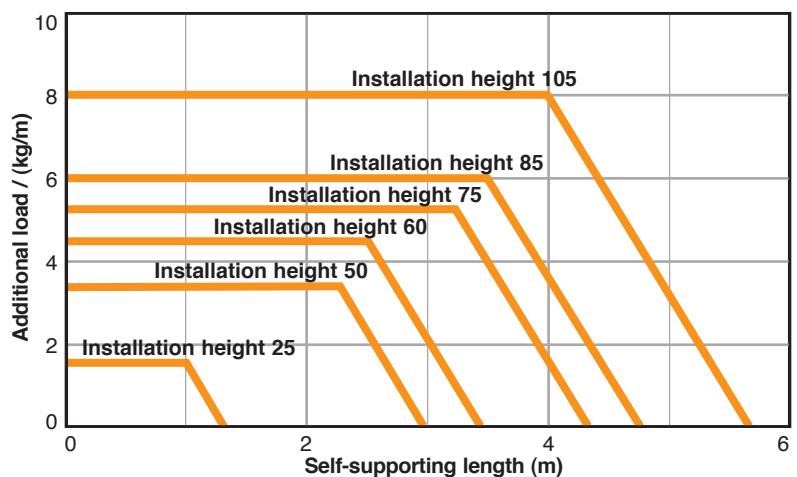

Dimensions	mm	kg/m
Bending radius	40 - 500	
Inside height	16 - 80	
Inside width	30 - 300	
Energy chain weight		0.6 - 3.4
Operating temperature	°C	
		-20 - 100

KL series

Plastic plate chain, KL model series




The advantages at a glance:

The plastic KL plate chain with aluminium cross bars is a more affordable and lightweight version of the steel chain. Routed in a channel, the energy chain can be used for distances up to 100 m.

- Energy chain with profile cross bars and integrated connection
- Highly resistant
- Inside width of 50 – 1000 mm without graduation
- Integrated connection
- Extending or shortening possible without tools
- Suitable for high travel speeds and acceleration
- To open in inside and outside radius
- 4x stop in joint
- 3-plate solution possible
- Side extension possible
- Flush cross bar locking mechanism


Stress diagram

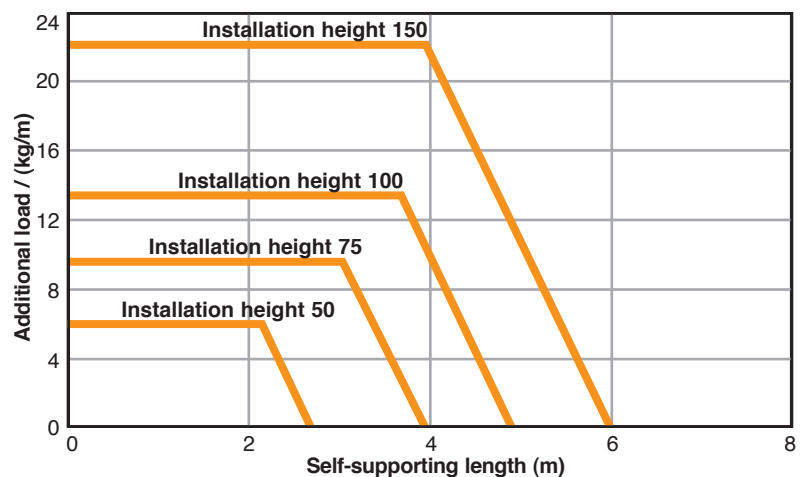

Dimensions	mm	kg/m
Bending radius	75 - 750	
Inside height	31 - 115	
Inside width	50 - 1000	
Energy chain weight		1.9 - 7.2
Operating temperature	°C	
	-20 - 100	

SL series

Steel plate chain, SL model series

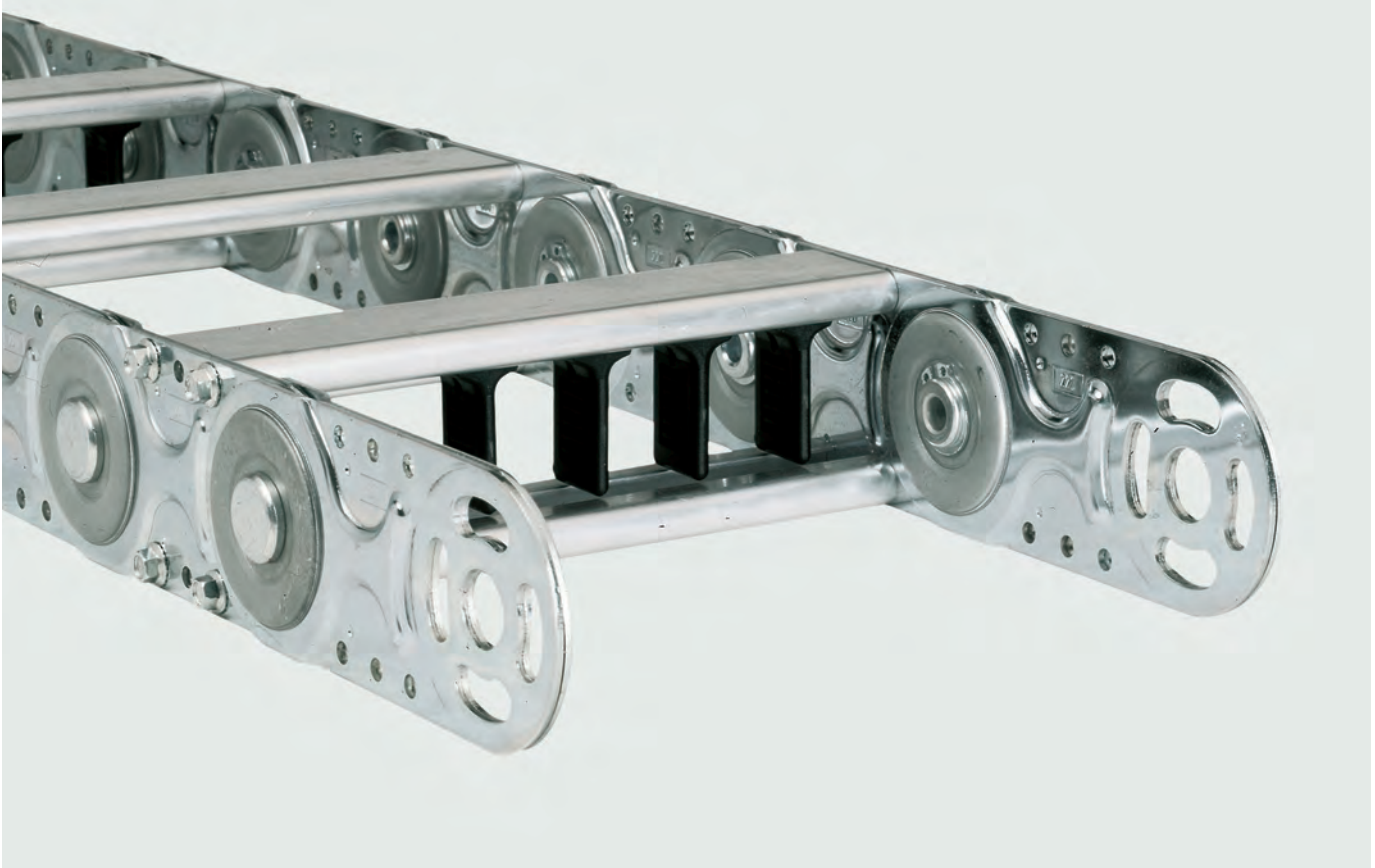


The advantages at a glance:

The SL steel plate chain is available in steel, in reinforced steel and in stainless steel with hole cross bars, foamed cross bars and plastic separators.

We recommend the use of steel chains with long self-supporting lengths, heavy cable weights and hydraulic hoses.

- Maximum degree of stability
- Easy handling, fast cross bar assembly and disassembly
- Customised solutions
- Freely adjustable cross bar width
- A wide range of cross bar division options
- Joint mechanism protected by cover discs
- Convenient shortening and extending

Stress diagram

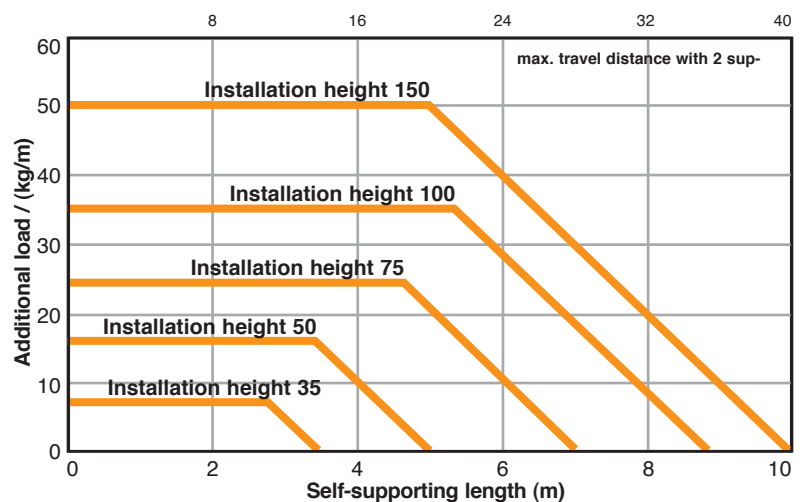

Dimensions	mm	kg/m
Bending radius	60 - 600	
Inside height	19 - 118	
Inside width	20 - 1,000	
Energy chain weight		2.2 - 25

Operating temperature	°C
	-20 - 600 (stainless steel -40 - 600)

13. Technical information cables

Short abbreviation key according to VDE and DIN	13.2
Conductor structure - according to VDE - according to AWG	13.3
Conductor resistances	13.4
Current loads	13.5
Bending radii according to DIN/VDE regulations	13.6
Colour code tables	13.7
Conductor labelling according to DIN 47100 in pairs	13.8
Chemical resistance of PVC and PUR cable jackets	13.9
Insulation material properties	13.10
Design of the protection class designation according to EN 60529	13.11
The price of copper	13.12
Cable reel rental fee at KTG	13.13
Torques for cable fittings	13.14
Form for special cables / system form	starting 14.1

Short abbreviation key according to VDE and DIN

Symbol	Description
A-	outer cable
AB-	outer cable with lightning protection design
AJ-	outer cable with induction protection design
AiC-	conductor with copper wire braiding
b-	movement
(1B...)	one-layer steel band, . . . thickness of the steel band in mm
(2B...)	two-layer steel bands, . . . thickness of the steel band in mm
Bd	bundle cabling
c	protection sheathing from jute and bulk
C	shield from copper wire braid
(C)	shield from copper wire braid over an individual cabling element
Cu	copper wire
DM	Dieselhorst-Martin stranding
Dreier	triple-stranding
e	copper tinned wire
e	single-wire
E	protection sheathing from bulk with embedded plastic band
f	multi strand
ff	superfine strand
F	foil isolation
F	cable core with petroleum filling
F	flat design of installation cables
F	star quad with phantom utilization for long distance communication cable of the railroad
(F...)	flat cable armor, . . . thickness in mm
G	rubber
2G	silicon rubber (SiR)
3G	isobutylene-isoprene rubber (JJR) or ethylene propylene rubber (EPR)
4G	ethylene vinyl acetate rubber (EVA)
5G	chloroprene rubber (CR)
6G	chlorosulfonated polyethylene (CSM)
7G	fluoride elastomer
8G	nitrile rubber (NBR)
G-	mine cable
GJ-	mine cable with induction protection design
J-	installation cable
JE-	installation cable for electronics industry
-J	cable with greenyellow ground conductor
-JZ	cable with greenyellow ground conductor and number printing
L-	cable
(L)	shield from plastic-coated aluminum band
(L)2Y	layered jacket
Lg	layer stranding
Li	conductor
m	jacket cable
M	lead jacket
Mz	lead jacket with hardening additive
-O	cable without greenyellow ground conductor
-OZ	cable without greenyellow ground conductor, with number printing
P	paper wire insulation
Pair	pair stranding
PiC	pair in copper wire braid
PiMF	pair in metal foil
Prfl	test wire

Symbol	Description
Q	steel braid
RAGL-	compensation cable for thermocouples
RD-	RHENOMATIC-cable
RG-	coaxial cable according to MIL specification
re	round, single-wire
rm	round, multiple-wire
(R/R)	inner conductor copper wire not insulated, outer conductor copper wire braid
RS-	computer cable
S	conventional railway signal cable
S-	switching cable
St	star quad for phantom utilization
St I	star quad in telephone cables for large distances
St III	star quad in site cables
(St)	static shield
Staku	Staku steel-copper conductor
Stli	steel-copper braid
T	support for suspended cables
TF	carrier frequency
TiC	group of three in the copper wire braid
TiMF	group of three in metal foil
v	tinned
vs	silver-plated
vg	gold-plated
vn	nickel-plated
W	corrugated steel jacket
X	crosslinked polyvinylchloride (PVC)
2X	crosslinked polyethylene (PE)
10X	crosslinked polyvinylidene fluoride (PVDF)
11X	crosslinked polyurethane X-PUR
Y	polyvinyl chloride (PVC)
Yu	polyvinyl chloride (PVC) flame-retardant (STAN-NOFLAM)
Yv	polyvinyl chloride (PVC) reinforced jacket
Yw	polyvinyl chloride (PVC) heat resistant to 90 °C (105 °C with shortened service life)
2Y	polyethylene (PE)
2Yv	polyethylene (PE), reinforced Jacket
02Y	polyethylene foam (PE)
02YS	foam-Skin
3Y	polystyrene (PS)
4Y	polyamide (PA)
5Y	polytetrafluoroethylene (PTFE)
6Y	perfluoroethylene propylene (FEP), TEFLON
7Y	ethylene tetrafluoroethylene (ETFE)
8Y	polyimide (PJ)
9Y	polypropylene (PP)
10Y	polyvinylidene fluoride (PVDF)
11Y	polyurethane (PUR)
12Y	polyethylene terephthalate (TPE, PETE)
(Z)	steel wire braid guaranteeing tensile strength

Conductor structure according to DIN VDE 0295/IEC 60228 and AWG

Conductor structure according to DIN VDE 0295 / IEC 60228

Cross section mm ²	Multi-strand conductor class 2 VDE 0295	Many-stranded conductor	Finely stranded conductor class 5 VDE 0295	Superfine strand conductor class 6 VDE 0295		
				Number of strands and individual strand mm		
0.14				18 x 0.10	18 x 0.10	36 x 0.07
0.25			14 x 0.15	32 x 0.10	32 x 0.10	65 x 0.07
0.34		7 x 0.25	19 x 0.15	42 x 0.10	42 x 0.10	88 x 0.07
0.38		7 x 0.27	12 x 0.20	21 x 0.15	48 x 0.10	100 x 0.07
0.50	7 x 0.30	7 x 0.30	16 x 0.20	28 x 0.15	64 x 0.10	131 x 0.07
0.75	7 x 0.37	7 x 0.37	24 x 0.20	42 x 0.15	96 x 0.10	195 x 0.07
1.00	7 x 0.43	7 x 0.43	32 x 0.20	56 x 0.15	128 x 0.10	260 x 0.07
1.50	7 x 0.52	7 x 0.52	30 x 0.25	84 x 0.15	192 x 0.10	392 x 0.07
2.50	7 x 0.67	19 x 0.41	50 x 0.25	140 x 0.15	320 x 0.10	651 x 0.07
4	7 x 0.85	19 x 0.52	56 x 0.30	224 x 0.15	512 x 0.10	1040 x 0.07
6	7 x 1.05	19 x 0.64	84 x 0.30	192 x 0.20	768 x 0.10	1560 x 0.07
10	7 x 1.35	49 x 0.51	80 x 0.40	320 x 0.20	1280 x 0.10	2600 x 0.07
16	7 x 1.70	49 x 0.65	128 x 0.40	512 x 0.20	2048 x 0.10	
25	7 x 2.13	84 x 0.62	200 x 0.40	800 x 0.20	3200 x 0.10	
35	7 x 2.52	133 x 0.58	280 x 0.40	1120 x 0.20		
50	19 x 1.83	133 x 0.69	400 x 0.40	705 x 0.30		
70	19 x 2.17	189 x 0.69	356 x 0.50	990 x 0.30		
95	19 x 2.52	259 x 0.69	485 x 0.50	1340 x 0.30		
120	37 x 2.03	336 x 0.67	614 x 0.50	1690 x 0.30		
150	37 x 2.27	392 x 0.69	765 x 0.50	2123 x 0.30		
185	37 x 2.52	494 x 0.69	944 x 0.50	1470 x 0.40		
240	61 x 2.24	627 x 0.70	1225 x 0.50	1905 x 0.40		
300	61 x 2.50	790 x 0.70	1530 x 0.50	2385 x 0.40		
400	61 x 2.89		2035 x 0.50			
500	61 x 3.23		1768 x 0.60			

The number of the strands is non-binding. The VDE 0295 determines only the maximum diameter of the single wire that is required for compliance with the maximum wire resistance at 20 °C.

Conductor structure according to AWG

Cross section mm ²	AWG	Copper wire mm Ø	Braid copper not insulated — Wire structure				Standard values				
			flexible	very flexible		highly flexible	Ω/km	A max. at 20°C	Cu weight kg/km		
			mm Ø	mm Ø	mm Ø	mm Ø					
0,08		0,32	10 x 0,10	0,37		40 x 0,05	0,37	210	0,5	0,71	
(0,09)	28	0,32	7 x 0,13	0,38		19 x 0,08	0,40	195		0,75	
0,10		0,36	14 x 0,10	0,44	28 x 0,07	0,44	51 x 0,05	0,42	190	1,0	0,98
0,14	26	0,39	18 x 0,10	0,49	36 x 0,07	0,49	72 x 0,05	0,50	138	1,5	1,27
(0,13)		0,40	7 x 0,16	0,49	10 x 0,13	0,53	19 x 0,10	0,51	130		1,30
(0,21)	24	0,51	7 x 0,20	0,61	19 x 0,13	0,61	41 x 0,08	0,58	85		2,00
0,25		0,57	14 x 0,15	0,66	32 x 0,10	0,66	128 x 0,05	0,75	77	2,5	2,27
(0,32)	22	0,64	7 x 0,25	0,76	19 x 0,16	0,80	26 x 0,13	0,76	56		3,00
0,34		0,64	7 x 0,25	0,75	42 x 0,10	0,74	180 x 0,05	0,80	56	4,5	3,10
0,50		0,80	16 x 0,20	0,95	28 x 0,15	0,95	256 x 0,05	1,00	39	6,0	4,50
(0,52)	20	0,81	7 x 0,32	0,90	19 x 0,20	0,94	41 x 0,13	0,91	33		5,00
0,75		0,98	24 x 0,20	1,20	42 x 0,15	1,20	385 x 0,05	1,20	26	10,0	6,90
(0,82)	18	1,02	7 x 0,40	1,22	19 x 0,25	1,27	65 x 0,13	1,20	21		8,00
1,00		1,15	32 x 0,20	1,30	57 x 0,15	1,30	511 x 0,05	1,40	20	15,0	9,20
(1,31)	16	1,30	7 x 0,51	1,52	19 x 0,30	1,47	105 x 0,13	1,50	16		11,00
1,50		1,40	30 x 0,25	1,60	85 x 0,15	1,85	196 x 0,10	1,85	14	20,0	14,10
(2,08)	14	1,62	7 x 0,64	1,85	19 x 0,36	1,85	105 x 0,16	1,85	11		19,00
2,50		1,80	51 x 0,25	2,10	142 x 0,15	2,25	322 x 0,10	2,40	8	25,0	23,20
(3,31)	12	2,05	7 x 0,80	2,50	19 x 0,46	2,35	165 x 0,16	2,41	6		28,00
(5,26)	10	2,60	37 x 0,40	2,80					3,8		42,00

Conductor resistances

The values according to DIN VDE 0295 are listed depending on the conductor cross-section and conductor class. The diameter of the individual wires of every conductor, beginning with 0.5 mm², are the specified maximal values allowed (see VDE 0295), that are required for compliance with the maximum wire resistance, not exceeded.

Nominal cross section mm ²	Cu conductor not insulated (Ω/km)		Cu conductor tinned (Ω/km)		Welding cable (Ω/km)	
	class 1 and 2	class 5 und 6	class 1 and 2	class 5 and 6	Cu conductor not insulated	Cu conductor tinned
0.05		380		392		
0.08		237		244		
0.11		170		175		
0.126		150		155		
0.14		134		138		
0.22		85		99		
0.25		76		79		
0.34		53		56		
0.5	36.0	39.0	36.7	40.1		
0.75	24.5	26.0	24.8	26.7		
1.0	18.1	19.5	18.2	20.0		
1.5	12.1	13.3	12.2	13.7		
2.5	7.41	7.98	7.56	8.21		
4.0	4.61	4.95	4.70	5.09		
6.0	3.08	3.30	3.11	3.39		
10.0	1.83	1.91	1.84	1.95		
16.0	1.15	1.21	1.16	1.24	1.16	1.19
25.0	0.727*	0.780	0.734	0.795	0.758	0.780
35.0	0.524*	0.554	0.529	0.565	0.536	0.552
50.0	0.387*	0.386	0.391	0.393	0.379	0.390
70.0	0.268*	0.272	0.270	0.277	0.268	0.276
95.0	0.193*	0.206	0.195	0.210	0.198	0.204
120.0	0.153*	0.161	0.154	0.164	0.155	0.159
150.0	0.124*	0.129	0.126	0.132	0.125	0.129
185.0	0.0991	0.106	0.100	0.108	0.102	0.105
240.0	0.0754	0.0801	0.0762	0.0817		
300.0	0.0601	0.0641	0.0607	0.0654		
400.0	0.0470	0.0486	0.0475	0.0495		

Class 1 = single-wire strand for single and multi-wire cables

Class 2 = multi-wire strand for single and multi-wire cables

Class 5 = multi-strand Cu conductor for single and multi-wire cables

Class 6 = superfine strand Cu conductor for single and multi-wire cables

*For mineral isolated cables (only for class 1).

Current loads

The stated values in the following tables are standard values and in simplified form extracted from VDE 0298 section 4 or extract from VDE 0100 section 430 and 523. In border cases, the VDE terms are to be taken into account. Valid for industrial machines VDE 0113, section 1 (EN 60204 section 1/IEC 204-1); for telecommunication and information systems VDE 0891 section 1; for telecommunication aerial cable VDE 0891 section 8; for flat cables VDE 0891 section 10. You can find general terms/requirements and recommended values in VDE 0298 section 2 and section 4. Amperage range, after 1.5 – 120 mm² (for group 3 up to 35 mm²) according to VDE 0100 section 430 for an ambient temperature of up to + 30 °C

Nominal cross section mm ²	Group 1		Group 2		Group 3	
	Cu conductor	Protection	Cu conductor	Protection	Cu conductor	Protection
	A	A	A	A	A	A
0.05	0.7		1		1	
0.14	1.4		2		2.8	
0.25	2.8		4.5		5	
0.34	4		6		7.5	
0.5	6		7.5		10	
0.75	9		12	6	15	10
1.0	11	6	15	10	19	10
1.5	16.5	16	16.5	16	21	20
2.5	21	20	22	20	29	25
4.0	28	25	30	25	39	35
6.0	36	35	38	35	51	50
10.0	49	40	53	50	70	63
16.0	65	63	72	63	94	80
25.0	85	80	94	80	125	100
35.0	105	100	118	100	154	125
50.0	126	125	142	125	198	160
70.0	160	160	181	160	245	200
95.0	193	160	219	200	292	250
120.0	223	200	253	250	344	315
150.0			335	250	391	315
185.0			382	315	448	400
240.0			453	400	528	400
300.0			504	400	608	500
400.0					726	630

Group 1	one or multiple single strand cables in conduit, e.g. PVC single core cable H 03V.../ H 05V.../ H 07V... according to VDE 0281.	Group 3	single strand, run free in the air, whereby the cables are run with an interspace of at least one time the cable diameter as well as single strand wiring in switching and distribution equipment and rail distributors.
Group 2	multi-core cables e.g. sheathed cable, moving cables, conduit cables in open or ventilated ducts.		

Amperage range of isolated cables and cables not run in the area of the ground at ambient temperatures over 30 °C (excerpt from VDE 0100 section 523, table 3).

Amperage range of the above stated table		
Ambient temperature °C	Rubber isolation permitted conductor temperature 60 °C %	PVC insulation permitted conductor temperature 70 °C %
over 30 to 35	91	92
over 35 to 40	82	87
over 40 to 45	71	79
over 45 to 50	58	71
over 50 to 55	41	61

Amperage range of cables with increased thermal-resistance for ambient temperature over 55 °C (excerpt from VDE 0100 section 523, table 4).

Ambient temperature for cables with		Amperage range of the above stated table
permitted conductor temperature 100 °C	permitted conductor temperature 180 °C	
°C	°C	%
over 55 to 65	over 55 to 145	100
over 65 to 70	over 145 to 150	92
over 70 to 75	over 150 to 155	85
over 75 to 80	over 155 to 160	75
over 80 to 85	over 160 to 165	65
over 85 to 90	over 165 to 170	53
over 90 to 95	over 170 to 175	38

Bending radii

Bending radiuses according to DIN and VDE specifications

The bending radiuses must not fall short of the specified bending radiuses in the tables. A shortened service life is to be anticipated for falling below these. Smallest permitted bending radiuses for high voltage current systems according to DIN VDE 0298 – section 3 to nominal voltage 0.6/1 kV.

Cables for hard wiring

Outer diameter of the cable or the strength of the flat cable in mm (D).

Laying procedure	to 10 mm	over 10 to 25 mm	over 25 mm
for hard wiring	4 x D	4 x D	4 x D
for molding	1 x D	2 x D	3 x D

Flexible Cables	to 8 mm	over 8 to 12 mm	over 12 to 20 mm	over 20 mm
for hard wiring	3 x D	3 x D	4 x D	4 x D
for free wiring	3 x D	4 x D	5 x D	5 x D
for insertion	3 x D	4 x D	5 x D	5 x D

D = outer diameter of the cable or the strength of the flat cable.

Colour code tables

Strand colour according to DIN VDE 0293-308

Cable and cables without green-yellow strand

Number of strands	Colours of the strands				
2	blue	brown	-	-	-
3	-	brown	black	grey	-
4	blue	brown	black	grey	-
5	blue	brown	black	grey	black

Cable and wires with green-yellow strand

Number of strands	Colours of the strands				
	Ground conductor	Active conductor			
3	green-yellow	blue	brown	-	-
4	green-yellow	-	brown	black	grey
5	green-yellow	blue	brown	black	grey

Not insulated concentric conductors, such as metallized jackets, armoring or shields are not considered as conductors in this table. a concentric conductor is identified by its arrangement and thus does not need to be identified by its colour.

Strand colours according to DIN 47100

Electronic data cables and computer cables with stranding with colour repetition after 45 strands. The first colour is the base colour of the strand. For multiple colour strands, the identification marking consists of a base colour and a ring colour. The second or third colour respectively is applied as ring identification marking. Ring width approx. 2 – 3 mm. A certain amount of blur of the identification colour at the edges and a small offset of both half rings is permitted. The manner of counting occurs from outside to inside through all layers consecutively.

No. Base/ring colours	No. Base/ring colours
1 white	32 yellow/blue
2 brown	33 green/red
3 green	34 yellow/red
4 yellow	35 green/black
5 grey	36 yellow/black
6 pink	37 grey/blue
7 blue	38 pink/blue
8 red	39 grey/red
9 black	40 pink/red
10 violet	41 grey/black
11 grey/pink	42 pink/black
12 red/blue	43 blue/black
13 white/green	44 red/black
14 brown/green	45 white
15 white/yellow	46 brown
16 yellow/brown	47 green
17 white/grey	48 yellow
18 grey/brown	49 grey
19 white/pink	50 pink
20 pink/brown	51 blue
21 white/blue	52 red
22 brown/blue	53 black
23 white/red	54 violet
24 brown/red	55 grey/pink
25 white/black	56 red/blue
26 brown/black	57 white/green
27 grey/green	58 brown/green
28 yellow/grey	59 white/yellow
29 pink/green	60 yellow/brown
30 yellow/pink	61 white/grey
31 green/blue	

Strand colour according to IEC for electronic cables with AWG design

Strand no.	Colour
1	black
2	brown
3	red
4	orange
5	yellow
6	green
7	blue
8	violet
9	grey
10	white
11	white-black
12	white-brown

The double color green-yellow may only be used for the grounding conductor (yellow is the base color). For the remaining double colors, the base color is white respectively.

For possibly required additional double colors, grey or brown are recommended as additional base colors.

Conductor labelling according to DIN 47100 in pairs

Pair identification colour repetition after 45 pairs.

Electronic data cables and computer cables with paired stranding. The first colour is the base colour of the strand. For multiple colour strands of the pair, the identification consists of a base colour and a ring colour. The second colour is applied as ring marking, ring width approx. 2 – 3 mm. A certain amount of blur of the identification colour at the edges and a small offset of both half rings are permitted from a manufacturing technique perspective.

The manner of counting occurs from outside to inside through all layers pairwise consecutively.

Paired stranding

Pair no.	a-strand	b-strand
1 23 45	white	brown
2 24 46	green	yellow
3 25 47	grey	pink
4 26 48	blue	red
5 27 49	black	violet
6 28 50	grey/pink	red/blue
7 29 51	white/green	brown/green
8 30 52	white/yellow	yellow/brown
9 31 53	white/grey	grey/brown
10 32 54	white/pink	pink/brown
11 33 55	white/blue	brown/blue

Pair no.	a-strand	b-strand
12 34 56	white/red	brown/red
13 35 57	white/black	brown/black
14 36 58	grey/green	yellow/grey
15 37 59	pink/green	yellow/pink
16 38 60	green/blue	yellow/blue
17 39 61	green/red	yellow/red
18 40	green/black	yellow/black
19 41	grey/blue	pink/blue
20 42	grey/red	pink/red
21 43	grey/black	pink/black
22 44	blue/black	red/black

Colour table according to RAL

Colour abbreviation according to HD 457

Colour	Short abbreviation	RAL	DESINA Outer jacket colour	DIN 47002 German	IEC 757 English
black	sw	9005	Power cable	sw	BK
brown	bn	8003		br	BN
red	rt	3000		rt	RD
orange	org	2003	Power cable	or	OG
yellow	ge	1021	Sensor/actor cables	ge	YE
green	gn	6018	Signal cable	gn	GN
blue	bl	5015		bl	BU
violet	vio	4001	Bus/Fiber optic cable	vi	VT
silvergrey	gr	7001		gr	GY
pebble grey		7032			
window grey		7040	Control cable		
white	ws	9010		ws	WH
pink	rs	3015		pk	PK
turquoise (petrol)	tk	5018		tq	TQ
green/yellow	gnge	6018/1021		gnye	GNYE
silver		-			SR
dark blue	dbl	5010		dbl	
dark brown	dbn	8014		dbn	
transparent	tr	-		tr	

Chemical resistance of PVC and PUR cable jackets

Anorganic	Concentration	Degree of resistance PVC	Degree of resistance PUR
Alaune	c.s.	+	
Aluminum salts	ec.	+	
Ammonia , a	10%	+	+
Ammonium acetate, a	ec.	+	
Ammonium carbonate, a	ec.	+	-
Ammonium chloride, a	ec.	+	+
Barium salts	ec.	+	+
Boric acid	100%	+	O
Calcium chloride, a	c.s.	+	O
Calcium chloride, a	10 and 40%		+
Calcium nitrate, a	c.s.	+	
Chrome salts, a	c.s.	+	+
Potassium carbonate, a (potash)		+	
Potassium chlorate, a	c.s.	+	
Potassium chloride, a	c.s.	+	O
Calcium dichromate, a		+	
Calcium iodide, a		+	
Calcium nitrate, a	c.s.	+	+
Potassium permanganate , a		O	-
Potassium sulfate, a		+	+
Copper salts, a	c.s.	+	+
Magnesium salts, a	c.s.	+	O
Sodium carbonate, a (Natron)		+	O
Sodium bisulfate, a		+	
Sodium chloride , a (common salt)		+	+
Sodium thiosulfate, a (fixing salt)		+	O
Nickel salts, a	c.s.	+	+
Phosphoric acid	50%	+	-
Mercury	100%	+	+
Mercury salts, a	c.s.	+	+
Nitric acid	30%	-	-
Hydrochloric acid	concentration	-	
Sulfur	100%	+	+
Sulfur dioxide,	gaseous	+	O
Carbon disulfide		-	-
Hydrogen sulfide		+	-
Sea water		+	+
Silver salts, a		+	+
Hydrogen peroxide, a	3%	+	+
Zinc salts, a		+	-
Tin(II) chloride		+	
Organic	Concentration	Degree of resistance PVC	Degree of resistance PUR
Ethyl alcohol	100%	-	-
Formic acid	30%	-	-
Benzine/Benzene		-	+
Succinic acid, a	c.s.	+	
Acetic acid	20%	O	O
Hydraulic oil		-	O
Isopropyl alcohol	100%	-	O
Kerosene			+
Machine oil		O	O
Methyl alcohol, a	100%	O	O
Mineral oil, depending on type (ASTM)			±
Oxalic acid, a	c.s.	+	
Paraffin oil			+
Plant oils and greases		+	+
Cutting oil		O	+
Tartaric acids, a		+	
Citric acid		+	

Legend:

ec. = each concentration + = resistant
c.s. = cold saturated O = conditionally resistant
a = aqueous - = unstable

Properties of isolation materials

Material	Abb.	Short abbreviation	Service temperature °C	Dielectric constant 10 ³	spec. contact Ohm x cm	Tensile strength N/mm ²	Elongation at break %	Absorption of water (20 °C) %	Weathering resistance	Fuel resistance	Oil resistance	Flammability
Polyvinyl chloride	PVC	Y	-30/+ 70	4 - 7	10 ¹² - 10 ¹⁵	10 - 25	150 - 300	0.4	moderate	moderate	good	self-extinguishing
Polyvinyl chloride heat resistant	PVC	Y	-20/+ 90	3.5	10 ¹² - 10 ¹⁵	10 - 25	150 - 300	0.4	moderate	moderate	good	self-extinguishing
High pressure polyethylene	LDPE	2Y	-50/+ 70	2.3	10 ¹⁷	20 - 30	500	0.1	good	low	moderate	flammable
Low pressure polyethylene	HDPE	2Y	-50/+ 100	2.3	10 ¹⁷	30	800	0.1	moderate	low	moderate	flammable
Polyurethane	PUR	11Y	-40/ +90/100	4.0 - 6.0	10 ¹²	30 - 45	300 - 600	1.5	very good	good	good	self-extinguishing
Polyamide	PA	4Y	-40/+ 80	3.5 - 7.0	10 ¹⁴	50 - 180	200 - 300	1 - 2	good	moderate	good	flammable
Polybutylene terephthalate	PBTP	-	-60/+ 110	3.0 - 4.0	10 ¹⁶	50 - 100	50 - 300	0.5	good	good	good	flammable
Polytetrafluoroethylene	PTFE	5Y	-190/+ 260	2.1	10 ¹⁸	14 - 40	240 - 400	0.01	very good	very good	very good	not flammable
tetrafluoroethylene hexafluoropropylene Copolymer	FEP	6Y	-100/+ 200	2.1	10 ¹⁸	20 - 25	250 - 350	0.01	very good	very good	very good	not flammable
Ethylene tetrafluoroethylene	ETFE	7Y	-100/+ 150	2.6	10 ¹⁶	40 - 50	100 - 300	0.01	very good	very good	very good	not flammable
Perfluoroalkoxy polymer	PFA	-	-190/+ 260	2.1	10 ¹⁵	30	300	0.01	very good	very good	good	not flammable
Chloroprene rubber	CR	5G	-40/+ 100	6.0 - 8.0	10 ¹³	25	450	1.0	very good	low	good	self-extinguishing
Silicon rubber	SI	2G	-60/+ 180	2.8 - 3.2	10 ¹⁵	5 - 10	200 - 350	1.0	very good	low	moderate	flame
Ethylene vinyl acetate	EVA	4G	-30/+ 125	5 - 7	10 ¹³	5	200	0.01	good	low	low	flammable
Ethylene propylene rubber	EPM/ EPDM	3G	-30/+ 120	3.2	10 ¹⁴	5 - 25	200 - 450	0.02	good	low	low	flammable
Thermoplastic polyolefin Elastomer	TPE-O	18Y	-40/+ 120	2.7 - 3.6	5 x 10 ¹⁴	>6	>400	1.5	very good	moderate	moderate	flammable
Thermoplastic polyester Elastomer	TPE-E	12Y	-70/+ 125	3.7 - 5.1	10 ¹²	3 - 25	280 - 650	0.3 - 0.6	very good	good	very good	flammable
Styrol triblock Copolymer	TPE-S	-	-75/ +105/140	2.2 - 2.6	10 ¹⁶	9 - 25	500 - 700	1 - 2	moderate	good	low	flammable

Only for basic materials, deviations are possible depending on the indented use/design.

Design of the protection class designation according to EN 60529

The protection of electrical equipment through corresponding enclosure is specified with code letters and code numbers. This protection class designation consists of the letters "IP" and two code numbers from 0 to 8. The first code number stands for the protection against contact and foreign substances, the second number specifies the degree of protection against water. The higher the respective code number is, the higher is the offered protection. The valid protection class for each product is specified in the technical data.

For example the designation:

IP 65	Code letter IP	IP	
	First code number	6	corresponds to: Protection against entrance of dust
	Second code number	5	corresponds to: Protection against sprayed water

For protection against contact and foreign substances

First code number	Protection scope designation	Explanation
0	No protection	No special protection of persons from accidental contact with standing or moving parts under voltage. No protection of the equipment against entry of solid foreign substances.
1	Protection against foreign substances > 50 mm	Protection against accidental contact of large area surfaces of standing and internally moving parts under voltage, e.g. with the hand, but no protection against intentional access to these parts. Protection against entry of solid foreign substances with a diameter larger than 50 mm.
2	Protection against foreign substances > 12 mm	Protection against contact by the fingers of standing or internally moving parts under voltage. Protection against entry of solid foreign substances with a diameter larger than 12 mm.
3	Protection against foreign substances > 2.5 mm	Protection against contact of standing or internally moving parts under voltage with tools, wires or similar of a thickness larger than 2.5 mm. Protection against entry of solid foreign substances with a diameter larger than 2.5 mm.
4	Protection against foreign substances > 1 mm	Protection against contact of standing or internally moving parts under voltage with tools, wires or similar of a thickness larger than 1 mm. Protection against entry of solid foreign substances with a diameter larger than 1 mm.
5	Protection against dust accumulation	Full protection against contact of standing or internally moving parts under voltage moving parts under voltage. Protection against dust accumulation. The entry of dust is not fully prevented but the dust may not enter in such quantities that the functioning is impaired.
6	Protection against dust accumulation	Full protection against contact of standing or internally moving parts under voltage moving parts under voltage. Protection against entry of dust.

For water protection

Second code number	Protection scope designation	Explanation
0	No protection	No special protection
1	Protection from vertically falling dripping water	Water drops that fall vertically may not have any damaging effect.
2	Protection from dripping water falling at an angle	Water drops that fall at an arbitrary angle of up to 15° to vertical may not have any damaging effect.
3	Protection from sprayed water	Water that falls in an arbitrary angle up to 60° to vertical may not have a damaging effect.
4	Protection from splashed water	Water that is splashed from all directions against the equipment may not have a damaging effect.
5	Protection from water projected from a nozzle	Water projected from a nozzle that is aimed at the equipment from all directions may not have any damaging effect.
6	Protection against flooding	Water may not enter into the equipment in damaging amounts during temporary flooding (e.g. by heavy seas)
7	Protection against immersion	Water may not enter in damaging amounts if the equipment is immersed in water for the defined pressure and time conditions.
8	Protection against submersion	Water may not enter in damaging amounts if the equipment is submerged in water for the defined pressure and indefinite amount of time.

You can find the valid protection class for the respective product in the technical data.

The price of copper

Cables and conductors are sold at DEL current daily prices for copper. The DEL is the listing for Deutsches Elektrolytkupfer für Leitzwecke (German electrolyte copper for conducting purposes), i.e. 99.5 % pure copper. The DEL is specified in € per 100 kg. You can normally find the DEL listing in the business section of the daily newspaper.

The copper basis

A proportion of the copper price is contained in the list price of many cables and almost all wires already. It is also specified in € per 100 kg.

- 150.00 €/100 kg for the most popular wires
- 100.00 €/100 kg for telephone cables and wires
- 0.00 €/100 kg for underground cable (e.g. high-voltage current NYY), thus price without metal.

Example: DEL 198.89 means:
100 kg copper (Cu) costs € 198.89.

Additional purchasing costs of 1,0 % are added to the daily quote for cables and wires.

The copper number (kg/100m)

The copper number is the copper weight of a cable or wire and is specified for every catalog article.

Example: Silflex N 3 G 1.5 mm²
copper number according to catalog 4.32 kg/100 m
The copper contained in 100 m of wire thus weighs 4.32 kg.

Formula for calculation of the copper surcharge

$$\text{Copper number (kg/100 m)} \times \frac{(\text{DEL} + 1,0 \% \text{ purchasing costs}) - \text{copper basis}}{100} = \text{copper surcharge in €/100 m}$$

Example calculation: Silflex N 3 G 1.5 mm²
DEL: 198.89 €/kg
Cu-Basis: 150.00 €/kg
Cu-Index: 4.32 kg/100 m

$$4.32 \text{ kg/100 m} \times \frac{(198.89 + 1,99) - 150.00}{100} = 2.20 \text{ €/100 m}$$

This sum would be for assumed DEL quote of 198.89 Euro the copper surcharge for 100 m Silflex N 3 G 1.5 mm².

Price including copper

The net price is calculated in the following way

Gross price
– Rebate (%)
± Copper surcharge
= Net price including copper

The copper surcharge is shown separately on our invoice.

Conditions for the relinquishment of cable and wire spools

Conditions for the relinquishment of cable and wire spools of the KABELTROMMEL GmbH & Co. KG in Köln (valid for the Federal Republic of Germany)

§ 1 Subject of the contract

Spools in the sense of the contract are standardized cable and wire spools of the sizes 05 to 28. Supporting material and spool casing are not subject matter of this contract.

§ 2 Conclusion of the contract

Between Kabeltrommel GmbH & Co. Kommanditgesellschaft, Köln (named as KTG in the following), and the recipient of cables or wires (named as purchaser in the following) a contractual relationship to the following conditions results with the acquisition from the cable plant/wholesale of cables or wires on KTG-marked spools at the time of the receipt of spools at the purchaser or the receiving location designated by the purchaser.

§ 3 Rental fee

- (1) KTG calculates no rental fee for the renting of the spools of type 05 provided that these are returned to KTG within an appropriate time period. However, the respective security deposit*) is calculated for the transferring of these spools abroad; the transfer is to be reported to the KTG.
- (2) For spools of the size 07 to 28, the following conditions are valid:
 - a) For a time period of 6 months, calculated starting with the delivery receipt of the respective supplier, no rental fee is calculated. If the spools are not returned within 6 months or numerically released in writing at the KTG, KTG imposes a spool rental fee. This amounts from the 7th month forward for every beginning month 15% of the security deposit*) of the spools.
 - b) For spools that are not returned to the KTG by expiration of 12 months or are released in writing, the full security deposit value is calculated as sales price. The KTG is prepared to take back spools that are sent back after the previously mentioned time limit, however, within 3 years. Provided that these spools are in a proper state, the KTG reimburses 25% of the security deposit.
 - c) The calculation occurs in each case after return/release of the spool, at the latest, however, after expiration of the rental period of 12 months. The sales tax is added in the respective legal amount to the time of the issuing of the invoice.

§ 4 Risk assumption and liability of the purchaser

The purchaser bears the risk and is liable for all damages to spools from the point in time of the beginning of the contract up to the acceptance of the spools through the KTG according to § 6, as far as they are not purchased according to § 3, (2) b.

§ 5 Guarantee and liability of the KTG

- (1) The liability of the KTG – equal for whatever legal ground – is restricted to the respective replacement wires in the framework of the coverage of its liability insurance, that is concluded in the usual scope with measured adequate insured sums for property damage and bodily injury.
- (2) A further liability – equal for whatever legal ground– is explicitly excluded.

§ 6 Return transport of spools

- (1) The purchaser must notify the KTG about all released spools for action of the return transport continuously and without delay in writing. This is arranged for through the KTG within an appropriate period of time.
- (2) The freight charges for the return transport are incurred by the KTG; for the loading or as the case may be for incidental loading costs at the place of dispatch, the purchaser/leasing is responsible.
- (3) All costs that accrue through return transport not according to instructions are to be carried by the purchaser.
- (4) As far as the purchaser has brought spools abroad, the purchaser has to arrange for the return transport at the purchaser's own cost.

§ 7 Payments

Invoices of the KTG are payable due net no later than 14 days after receipt. For delay of payment, we calculate – besides incidental dunning costs – interest on late payments in the amount of at least 3 % over the prime rate of the German Federal Bank or respectively the higher of arising costs to us from the intermediate financing of the owed amount.

§ 8 Jurisdiction– miscellaneous

- (1) Jurisdiction for all disputes resulting from this contractual relationship is Cologne, Germany.
- (2) The KTG is also entitled to file a suit at the site of the respective purchaser.
- (3) Changes and additions to this contract must be in written form; this also applies for an amendment to this clause.

*) The security deposits comply with the respective valid conditions of the KABELTROMMEL GmbH & Co. KG

KABELTROMMEL GmbH & Co. KG
Schanzenstr. 30
51063 Cologne
Tel.: 02 21/67 88-0
Fax: 02 21/67 88-205
www.kabeltrommel.de
info@kabeltrommel.de

Validity area: Federal Republic of Germany

Torques for cable fittings

Cable fittings with metric threads, EN 50262

Nominal size	recommended torque in Nm	
	Plastic	Metal
M 12 x 1.5	1.0	5
M 16 x 1.5	2.5	5
M 20 x 1.5	4.0	7.5
M 25 x 1.5	6.0	10
M 32 x 1.5	7.0	15
M 40 x 1.5	7.5	18
M 50 x 1.5	8.0	20
M 63 x 1.5	9.0	20

Cable fittings with PG threads, DIN VDE 0619

Nominal size	recommended torque in Nm	
	Plastic	Metal
PG 7	2.5	6.25
PG 9	3.75	6.25
PG 11	3.75	6.25
PG 13.5	3.75	6.25
PG 16	5.0	7.5
PG 21	7.5	10.0
PG 29	7.5	10.0
PG 36	7.5	10.0
PG 42	7.5	10.0
PG 48	7.5	10.0

Note:

The specified values are standard values for achieving the protection class IP 68, 5 bar.
The torque should be suitable to the material and wire application.

Wire request form

1. Appointments	Recorded	Submittal of quotation				
2. Customer	Company	Cust. No.				
	Contact person	Department				
	Telephone	Fax				
	Postcode	City				
	Road	P.O. Box				
3. Amount	Demand	Batch size				
4. Dimensions	Outer-Ø	max.	min.			
	Conductor gauge =	x	mm ² /	x	mm ²	
5. Cable structure	Cable	<input type="checkbox"/> not insulated	<input type="checkbox"/> tinned	<input type="checkbox"/> silvered	<input type="checkbox"/> highly flexible	<input type="checkbox"/>
	Cable insul.	<input type="checkbox"/> PVC	<input type="checkbox"/> PE/PP	<input type="checkbox"/> TPE	<input type="checkbox"/> Silicon	<input type="checkbox"/> FEP/PTFE
	Coding	<input type="checkbox"/> black with numbers	<input type="checkbox"/> Ground cable green/yellow	<input type="checkbox"/> DIN 47100	<input type="checkbox"/> other	
6. Stranding	<input type="checkbox"/> Plies	<input type="checkbox"/> Couples	<input type="checkbox"/> Combination cable			
7. Inside jacket						
8. Shielding	<input type="checkbox"/> Couple/Element shield	<input type="checkbox"/> Braided	<input type="checkbox"/> Electrical isolation/Description			
		<input type="checkbox"/> Twisted shield	<input type="checkbox"/> Foil shield			
	<input type="checkbox"/> Overall shield	<input type="checkbox"/> Meshwork	<input type="checkbox"/> Twisted shield	<input type="checkbox"/> Foil shield	<input type="checkbox"/> Drain wire	
	<input type="checkbox"/> Other properties					
9. Outer jacket	PVC	PUR	PE	Silicon	Teflon	
	Color	Printing				
10. Electrical requirements	Operating voltage (V)	Test voltage (V)	max. Operating capacitance (pF/m)	Impedance	Absorption	Other spec.
11. Mechanical requirements	Operating temperature - ____ °C + ____ °C Short-term overtemperature - ____ °C + ____ °C					
	Drag chain traverse path ____ m Speed ____ m/s Cycles/Week ____ Radius: _____					
	<input type="checkbox"/> Burning behavior	<input type="checkbox"/> Flame-retardant	<input type="checkbox"/> Halogen-free	<input type="checkbox"/> Low smoke		
Environmental conditions (oil, chemicals, UV, foodstuffs areas, etc.)						
How is the wire being run? Note.						
12. Standards	<input type="checkbox"/> UL/CSA <input type="checkbox"/> HAR <input type="checkbox"/> Miscellaneous					
13. Notes	e.g. replacement for / known problems /					

System request for LÜTZE SUPERFLEX® chains and cables

Company: _____
 Contact person: _____
 Department: _____
 Street: _____
 City, ZIP code: _____
 Telephone: _____
 Fax: _____



Germany
 Friedrich Lütze GmbH
 Postfach 1224 (PLZ 71366)
 Bruckwiesenstraße 17-19
 71384 Weinstadt
 Tel.: +49 (0)71 51 60 53-0
 Fax: +49 (0)71 51 60 53-277(-288)
 info@luetze.de

UK
 Lutze Ltd.
 Unit 3 Sandy Hill Park,
 Sandy Way, Amington
 Tamworth, Staffs, B77 4DU
 Phone: +44 1827 31333-0
 Fax: +44 1827 31333-2
 sales.gb@lutze.co.uk

Please advise us of your requirements using the system form. We will gladly prepare an offer for you:

Installation variations (according to figures 1 – 11): _____

Length of the traversing path (in mm): _____

Infeed in the middle? yes _____ no _____

If no, please attach or create a sketch!

Acceleration (in m/sec²): _____

Traversing speed (in m/sec): _____

Traversing frequency of occurrence/year (cycles): _____

max. building width of the chain (in mm): _____


max. building height of the chain (in mm): _____

if necessary, the guide channel (C-track) (in mm): _____

Ambient temperature (in °C): _____

Air humidity (in %): _____

Please fax us the completed form. You'll gladly receive an offer from us.

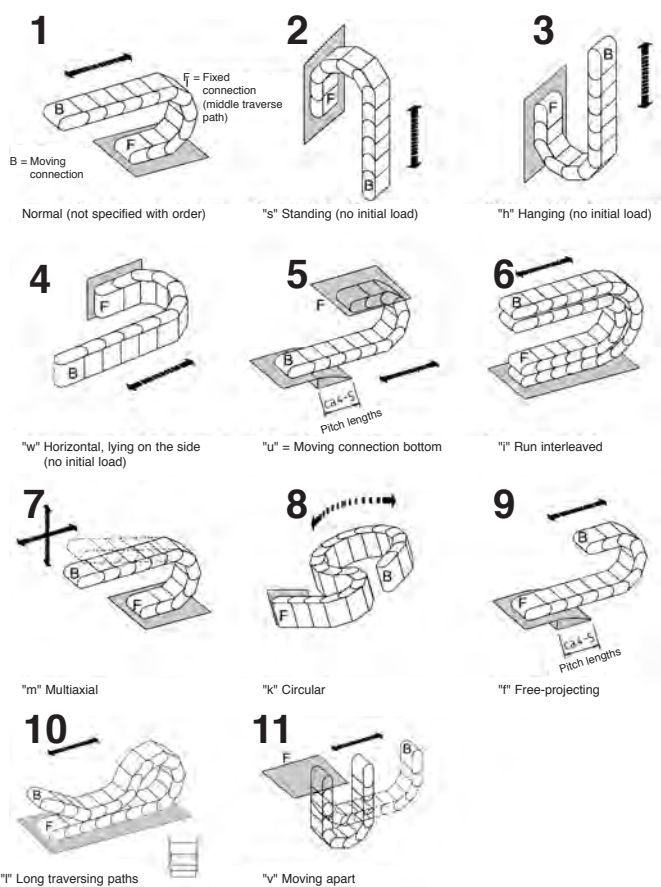

Assignment (electro-cables/conduits)

Quantity	Manufacturer	Article number	Cross section	Diameter	Weight kg/m	Minimum bending radius

Distinctive features/environmental influences/sketch:

Certificates



CERTIFICATE

DQS GmbH
Deutsche Gesellschaft zur Zertifizierung von Managementsystemen

hereby certifies that the company

Friedrich Lütze GmbH & Co. KG
Bruckwiesenstrasse 17-19
71384 Weinstadt

has implemented and maintains a **Quality Management System**

Scope:
Development, production and distribution of electrical and electronic components and solutions for the automation technology

Through an audit, documented in a report, it was verified that the management system fulfills the requirements of the following standard:

ISO 9001 : 2008

Certificate registration no.	001737 QM08	
Date of certification	2010-07-05	
Valid until	2013-07-04	

August-Schanz-Straße 21, 60433 Frankfurt am Main

1 / 2



CERTIFICATE

DQS GmbH
Deutsche Gesellschaft zur Zertifizierung von Managementsystemen

hereby certifies that the company

Friedrich Lütze GmbH & Co. KG
Bruckwiesenstrasse 17-19
71384 Weinstadt

has implemented and maintains an **Environmental Management System**

Scope:
Development, production and distribution of electrical and electronic components and solutions for the automation technology

Through an audit, documented in a report, it was verified that the management system fulfills the requirements of the following standard:

ISO 14001 : 2004

Certificate registration no.	001737 UM	
Date of certification	2010-08-03	
Valid until	2013-08-02	

August-Schanz-Straße 21, 60433 Frankfurt am Main




C E R T I F I C A T E

awarded to

Friedrich Lütze GmbH & Co. KG
Bruckwiesenstrasse 17-19
71384 Weinstadt
Germany

DQS GmbH

confirms, as an IRIS approved certification body, that the Management System of the above organization has been assessed and found to be in accordance with the

International Railway Industry Standard (IRIS)
Revision 02, May 2009

for the activity of Manufacturing & Design

for the scope of certification 9 (On board vehicle control)

Development, production and marketing of components and systems for rail vehicles

Date of the audit: 21.05.2010
Date of issue of the certificate: 14.06.2010
Certificate valid until: 13.06.2013

Current date: 14.06.2010
Certificate-Register-No.: 001737 IRIS

this document has been produced by the Audit-Tool V3.1.0.2 licensed to DQS
© 2010 UNIFE. All rights reserved.

Article number index

Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page
100001	6.9	100416	6.7	100652	6.15	100988	2.10	103685	7.6	103808	7.7
100002	6.9	100417	6.8	100653	6.15	100990	6.8	103686	7.6	103809	7.7
100003	6.9	100419	6.8	100654	6.15	100998	2.10	103687	7.6	104202	4.6
100012	6.9	100426	6.8	100655	6.15	101015	2.15	103688	7.6	104203	4.11
100013	6.9	100429	6.8	100704	6.17	101048	2.10	103690	7.6	104204	4.11
100024	6.9	100430	6.8	100707	2.10	101049	2.10	103691	7.6	104205	4.7
100025	6.9	100431	6.8	100711	6.17	101052	7.10	103692	7.6	104206	4.7
100026	6.9	100432	6.8	100713	6.17	101063	6.7	103693	7.6	104207	4.7
100027	6.9	100433	6.8	100714	6.17	101085	6.7	103694	7.6	104208	4.6
100050	6.9	100437	6.8	100715	6.17	101098	6.16	103695	7.6	104210	4.6
100051	6.9	100440	6.8	100716	6.17	101099	6.16	103696	7.6	104214	4.5
100052	6.9	100443	6.8	100717	6.17	101100	6.16	103697	7.6	104215	4.4
100053	6.9	100453	6.8	100719	6.17	101101	6.16	103699	7.6	104216	4.11
100078	6.9	100454	6.8	100720	6.17	101102	6.16	103700	7.6	104217	4.11
100079	6.9	100455	6.8	100747	6.17	101104	6.16	103701	7.6	104218	4.11
100080	6.9	100456	6.8	100751	6.17	101130	6.16	103702	7.6	104219	4.11
100081	6.9	100458	6.8	100753	6.17	101131	6.16	103703	7.6	104220	4.6
100104	6.9	100464	6.8	100754	6.17	101135	6.16	103704	7.6	104224	4.5
100105	6.9	100465	6.8	100755	6.17	101136	6.16	103705	7.6	104238	4.7
100106	6.9	100468	6.8	100756	6.17	101137	6.16	103706	7.6	104243	4.9
100107	6.9	100469	6.8	100757	6.17	101138	6.16	103707	7.6	104245	4.8
100118	6.9	100471	6.8	100758	6.17	101139	6.16	103708	7.6	104246	4.8
100119	6.9	100473	6.8	100759	6.17	101140	6.16	103709	7.6	104247	4.9
100123	6.9	100475	6.8	100760	6.17	101141	6.16	103710	7.6	104251	4.5
100124	6.9	100480	6.8	100761	2.10	101144	6.16	103711	7.6	104252	4.6
100154	2.10	100481	6.8	100765	2.10	101147	6.16	103712	7.6	104258	4.6
100215	6.7	100537	6.15	100766	2.10	101148	6.16	103713	7.6	104259	4.6
100256	6.17	100552	7.11	100767	2.10	101149	6.16	103714	7.6	104264	4.5
100327	7.10	100573	6.15	100768	2.10	101151	6.16	103715	7.6	104265	4.4
100338	7.10	100574	6.15	100769	2.10	101164	2.15	103717	7.6	104267	4.5
100354	6.8	100575	6.15	100771	2.10	101165	2.15	103718	7.6	104270	4.6
100358	6.7	100581	6.15	100777	2.10	101166	2.15	103719	7.6	104275	4.4
100363	6.7	100588	6.15	100778	2.10	101167	2.15	103720	7.6	104279	4.10
100364	6.7	100589	6.15	100779	2.10	101209	2.15	103721	7.6	104284	4.5
100365	6.7	100590	6.15	100782	2.10	101210	2.15	103722	7.6	104287	4.4
100366	6.7	100591	6.15	100784	2.10	101211	2.15	103723	7.6	104289	4.10
100368	6.7	100592	6.15	100787	2.10	101212	2.15	103724	7.6	104290	4.5
100369	6.7	100597	6.15	100788	2.10	101213	2.15	103780	7.7	104291	4.5
100370	6.7	100600	6.15	100789	2.10	101226	6.16	103781	7.7	104292	4.5
100371	6.7	100602	6.15	100790	2.10	101227	2.15	103782	7.7	104293	4.5
100372	6.7	100605	6.15	100791	2.10	101228	2.15	103783	7.7	104294	5.6
100373	6.7	100606	6.15	100792	2.10	101229	2.15	103784	7.7	104301	4.9
100374	6.7	100607	6.15	100793	2.10	101233	6.16	103785	7.7	104303	4.8
100378	6.7	100608	6.15	100794	2.10	101236	6.16	103786	7.7	104304	4.8
100379	6.7	100610	6.15	100795	2.10	101238	2.15	103787	7.7	104307	4.9
100380	6.7	100611	6.15	100796	2.10	101253	6.16	103788	7.7	104310	4.8
100384	6.7	100616	6.15	100797	2.10	101256	2.15	103789	7.7	104311	4.9
100385	6.7	100618	6.15	100807	2.10	101278	7.14	103790	7.7	104313	4.9
100386	6.7	100619	6.15	100808	2.10	101280	7.11	103791	7.7	104318	5.6
100387	6.7	100625	6.15	100856	2.10	101281	7.11	103792	7.7	104319	5.6
100388	6.7	100626	6.15	100866	6.6	101288	2.11	103793	7.7	104323	5.6
100389	6.7	100627	6.15	100871	6.8	101312	6.7	103794	7.7	104324	5.6
100391	6.7	100628	6.15	100893	2.10	101321	7.13	103795	7.7	104326	4.8
100392	6.7	100630	6.15	100900	2.10	101327	6.15	103796	7.7	104327	4.9
100394	6.7	100632	6.15	100901	2.10	101351	2.10	103797	7.7	104335	4.9
100395	6.7	100633	6.15	100918	7.10	101399	3.12	103798	7.7	104336	4.9
100398	6.7	100637	6.15	100920	7.10	101423	7.12	103799	7.7	104337	4.8
100400	6.7	100638	6.15	100921	6.16	101424	2.10	103800	7.7	104338	4.9
100405	6.7	100639	6.15	100922	7.10	101445	3.12	103801	7.7	104339	4.9
100406	6.7	100640	6.15	100933	2.15	101449	6.17	103802	7.7	104347	4.8
100407	6.7	100642	6.15	100948	7.10	101667	3.12	103803	7.7	104360	4.7
100408	6.7	100646	6.15	100951	7.10	103681	7.6	103804	7.7	108000	2.11
100410	6.7	100648	6.15	100964	7.10	103682	7.6	103805	7.7	108001	2.11
100411	6.7	100649	6.15	100983	6.9	103683	7.6	103806	7.7	108002	2.11
100413	6.7	100650	6.15	100987	2.10	103684	7.6	103807	7.7	108003	2.11

Article number index

Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page
108022	2.15	108502	3.12	109284	2.12	110070	7.10	110209	8.5	110399	7.12
108025	6.15	108503	3.12	109285	2.12	110071	7.10	110210	8.5	110415	7.10
108026	2.15	108504	3.12	109286	2.12	110072	7.10	110211	8.5	110418	6.4
108036	2.15	108506	3.12	109287	2.12	110073	7.10	110212	8.5	110424	6.4
108037	2.15	108507	3.12	109288	2.12	110074	7.10	110213	8.5	110437	6.4
108045	2.10	108508	3.12	109289	2.12	110075	7.10	110214	8.5	110443	6.4
108047	6.16	108509	3.12	109290	2.12	110076	7.10	110216	8.5	110446	2.11
108049	2.10	108510	3.12	109450	2.14	110078	7.10	110221	8.5	110450	6.4
108055	2.10	108511	3.12	109451	2.14	110079	7.10	110222	8.5	110457	6.4
108057	7.12	108512	3.12	109452	2.14	110080	7.10	110223	8.5	110459	6.4
108059	6.17	108515	3.11	109453	2.14	110081	7.10	110224	8.5	110471	7.11
108062	6.8	108516	3.11	109454	2.14	110089	7.10	110227	8.5	110475	7.11
108125	7.10	108517	3.11	109455	2.14	110122	7.10	110228	8.5	110477	7.12
108126	7.10	108518	3.11	109456	2.14	110123	7.10	110229	8.5	110478	7.11
108128	7.10	108519	3.11	109457	2.14	110125	7.10	110232	8.5	110489	2.11
108130	7.10	108520	3.11	109458	2.14	110127	7.10	110233	8.5	110499	2.11
108131	7.10	108521	3.11	109459	2.14	110129	7.10	110235	8.5	110506	6.4
108132	7.10	108522	3.11	109460	2.14	110131	7.10	110236	8.5	110507	7.12
108133	7.10	108524	3.11	109461	2.14	110135	7.10	110242	8.5	110514	7.12
108134	7.10	108525	3.11	109462	2.14	110137	7.13	110243	8.5	110516	8.9
108136	7.10	108526	3.11	109463	2.14	110138	3.13	110244	8.5	110517	8.9
108137	7.10	108527	3.11	109464	2.14	110144	6.6	110245	8.5	110518	8.9
108138	7.10	108528	3.11	109465	2.14	110150	8.5	110248	7.13	110519	8.9
108147	7.11	108529	3.11	109466	2.14	110155	8.4	110249	7.10	110526	6.4
108149	7.11	108530	3.11	109467	2.14	110156	8.4	110251	8.6	110528	8.7
108154	7.11	108531	3.11	109468	2.14	110157	8.4	110252	8.6	110529	8.7
108299	3.12	108540	3.13	109469	2.14	110158	8.4	110253	8.6	110530	8.7
108300	3.12	108543	3.13	109470	2.14	110165	8.5	110254	8.6	110531	8.7
108317	7.10	108544	3.13	109471	2.14	110168	6.4	110255	8.6	110532	8.7
108349	6.18	108545	3.13	109472	2.14	110169	6.4	110256	8.6	110533	8.7
108350	6.18	108800	2.11	109473	2.14	110171	6.6	110257	8.6	110534	8.7
108351	6.18	108801	2.11	109474	2.14	110172	6.6	110258	8.6	110535	8.7
108352	6.18	108802	2.11	109475	2.14	110173	6.6	110259	8.6	110536	8.8
108353	6.18	108803	2.11	109476	2.14	110176	6.6	110260	8.6	110537	8.8
108354	6.18	109241	2.13	109479	2.14	110177	6.4	110261	8.6	110538	8.8
108355	6.18	109242	2.13	109568	6.19	110178	6.4	110262	8.6	110539	8.8
108356	6.18	109243	2.13	109569	6.19	110179	6.4	110263	8.6	110540	8.8
108357	6.18	109244	2.13	109570	6.19	110180	6.4	110264	8.6	110541	8.8
108358	6.18	109245	2.13	109571	6.19	110181	6.4	110265	8.6	110549	8.7
108359	6.18	109247	2.13	109572	6.19	110182	6.4	110272	8.6	110551	8.7
108360	6.18	109248	2.13	109573	6.19	110183	6.4	110273	8.6	110552	8.7
108361	6.18	109249	2.13	109574	6.19	110184	6.4	110274	8.6	110553	8.7
108362	6.18	109250	2.13	109575	6.19	110185	6.4	110275	8.6	110554	8.7
108363	6.18	109251	2.13	109576	6.19	110186	6.4	110278	8.6	110555	8.7
108364	6.18	109253	2.13	109577	6.19	110188	6.4	110279	8.6	110558	8.7
108365	6.18	109254	2.13	109578	6.19	110189	6.4	110280	8.6	110559	8.7
108366	6.18	109255	2.13	109579	6.19	110190	7.14	110283	8.6	110563	2.11
108367	6.18	109256	2.13	109580	6.19	110191	6.4	110284	8.6	110564	2.11
108368	6.18	109257	2.13	109581	6.19	110192	6.4	110286	8.6	110567	2.11
108369	6.18	109258	2.13	109582	6.19	110193	6.4	110287	8.6	110570	6.11
108370	6.18	109259	2.13	109583	6.19	110194	6.4	110311	8.9	110571	6.11
108372	6.18	109260	2.13	109584	6.19	110195	6.4	110312	8.9	110574	6.11
108373	6.18	109261	2.13	109585	6.19	110196	6.4	110313	8.9	110575	6.11
108374	6.18	109262	2.13	109587	6.19	110197	6.4	110314	8.9	110576	6.11
108375	6.18	109271	2.12	110000	7.10	110198	6.6	110315	8.9	110577	6.11
108376	6.18	109272	2.12	110001	7.10	110199	6.6	110316	8.9	110582	8.8
108380	6.18	109273	2.12	110002	7.10	110200	8.5	110317	8.9	110600	7.13
108381	6.18	109274	2.12	110003	7.10	110201	8.5	110318	8.9	110601	7.13
108382	6.18	109275	2.12	110004	7.10	110202	8.5	110319	8.9	110602	7.13
108383	6.18	109277	2.12	110005	7.10	110203	8.5	110320	8.9	110604	7.13
108391	6.18	109278	2.12	110006	7.10	110204	8.5	110329	6.6	110606	7.13
108401	6.18	109279	2.12	110008	7.10	110205	8.5	110371	7.11	110607	7.13
108410	6.18	109280	2.12	110009	7.10	110206	8.5	110372	6.4	110608	2.11
108500	3.12	109281	2.12	110010	7.10	110207	8.5	110374	7.12	110609	7.13
108501	3.12	109283	2.12	110011	7.10	110208	8.5	110376	7.12	110611	7.13

Article number index

Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page
110617	7.14	110945	7.10	111290	3.7	111480	3.4	111690	6.5	111920	2.8
110618	7.13	110947	2.11	111291	3.7	111481	3.4	111707	6.4	111921	2.8
110619	7.13	110954	2.11	111292	3.7	111482	3.4	111720	3.11	111922	2.8
110620	7.13	110977	8.5	111293	3.7	111483	3.4	111721	3.11	111923	2.8
110621	7.14	110988	7.10	111294	3.7	111484	3.4	111722	3.11	111924	2.8
110622	7.13	110991	6.4	111295	3.7	111485	3.4	111723	3.11	111930	2.9
110624	7.14	110992	6.4	111296	3.7	111486	3.4	111724	3.11	111931	2.9
110625	7.13	110993	7.11	111303	2.11	111487	3.4	111725	3.11	111932	2.9
110626	7.13	111001	2.11	111304	2.11	111490	3.9	111810	8.5	111933	2.9
110629	7.13	111016	6.4	111305	2.11	111491	3.9	111811	8.5	111934	2.9
110633	7.13	111026	8.9	111306	2.11	111492	3.9	111820	8.4	111935	2.9
110634	7.13	111027	8.9	111324	7.12	111495	3.8	111821	8.4	111936	2.9
110635	7.13	111028	8.9	111327	7.11	111496	3.4	111822	8.4	111937	2.9
110637	7.13	111029	8.9	111329	2.11	111499	3.8	111823	8.4	111938	2.9
110641	7.13	111041	3.13	111337	3.7	111530	3.5	111824	8.4	111939	2.9
110642	7.13	111045	2.10	111370	3.6	111531	3.5	111826	8.4	111940	2.9
110643	7.13	111053	7.14	111371	3.6	111532	3.5	111827	8.4	111941	2.9
110644	6.4	111086	7.11	111372	3.6	111533	3.5	111828	8.4	111942	2.9
110645	7.13	111092	3.10	111373	3.6	111534	3.5	111829	8.4	111943	2.9
110647	7.13	111093	3.10	111374	3.6	111535	3.5	111830	8.4	111944	2.9
110650	7.11	111094	3.10	111375	3.6	111545	3.6	111832	8.4	111945	2.9
110651	7.13	111100	3.10	111376	3.6	111548	3.6	111833	8.4	111946	2.9
110652	3.13	111101	3.10	111377	3.6	111549	3.6	111834	8.4	111947	2.9
110653	7.13	111102	6.4	111378	3.6	111560	3.5	111835	8.4	111948	2.9
110655	8.7	111109	7.13	111400	3.5	111561	3.5	111836	8.4	111949	2.9
110658	7.11	111117	7.12	111401	3.5	111562	3.5	111838	8.4	111950	2.9
110659	7.13	111126	3.7	111402	3.5	111563	3.5	111840	8.4	111951	2.9
110660	7.13	111127	3.7	111412	3.8	111564	3.5	111841	8.4	111952	2.9
110665	7.13	111128	3.7	111416	3.9	111648	6.5	111842	8.4	111953	2.9
110701	2.11	111129	3.7	111417	3.9	111651	6.5	111843	8.4	111954	2.9
110710	7.11	111130	3.7	111420	3.5	111652	6.5	111844	8.4	111955	2.9
110717	7.11	111131	3.7	111421	3.5	111653	6.5	111886	2.8	111956	2.9
110719	7.10	111132	3.7	111422	3.5	111654	6.5	111887	2.8	111957	2.9
110720	7.12	111133	3.7	111423	3.5	111656	6.5	111888	2.8	111958	2.9
110722	7.11	111135	3.7	111424	3.5	111657	6.5	111889	2.8	111959	2.9
110732	8.5	111136	3.7	111425	3.5	111658	6.5	111890	2.8	111960	2.9
110736	7.11	111139	3.8	111426	3.5	111659	6.5	111891	2.8	111961	2.9
110742	7.12	111197	3.7	111427	3.5	111660	6.5	111892	2.8	111962	2.9
110743	7.11	111206	7.11	111428	3.5	111661	6.5	111893	2.8	111963	2.9
110745	7.13	111215	2.11	111429	3.6	111662	6.5	111894	2.8	111964	2.9
110762	6.17	111232	7.13	111430	3.6	111663	6.5	111895	2.8	111965	2.9
110785	8.9	111241	3.7	111437	3.9	111664	6.5	111896	2.8	111966	2.9
110787	7.11	111242	3.7	111438	3.9	111665	6.5	111897	2.8	111967	2.9
110790	7.11	111243	3.7	111439	3.5	111666	6.5	111898	2.8	111968	2.9
110795	7.13	111245	2.11	111452	3.8	111667	6.5	111899	2.8	111969	2.9
110829	7.13	111246	2.11	111453	3.8	111668	6.5	111900	2.8	111970	2.9
110870	2.16	111247	2.11	111454	3.8	111669	6.5	111901	2.8	111971	2.9
110871	2.16	111248	2.11	111455	3.8	111670	6.5	111902	2.8	111972	2.9
110872	2.16	111270	3.5	111456	3.8	111671	6.5	111903	2.8	111973	2.9
110873	2.16	111271	3.5	111457	3.8	111672	6.5	111904	2.8	111975	2.9
110874	2.16	111272	3.5	111458	3.8	111673	6.5	111905	2.8	111980	2.8
110875	2.16	111273	3.5	111459	3.8	111674	6.5	111906	2.8	111981	2.8
110876	2.16	111274	3.5	111460	3.4	111675	6.5	111907	2.8	111982	2.8
110877	2.16	111275	3.5	111461	3.4	111676	6.5	111908	2.8	111983	2.8
110878	2.16	111276	3.5	111462	3.4	111677	6.5	111909	2.8	111984	2.8
110901	8.5	111277	3.5	111463	3.4	111678	6.5	111910	2.8	111985	2.8
110915	7.12	111278	3.5	111464	3.4	111679	6.5	111911	2.8	112900	5.5
110917	7.12	111279	3.5	111465	3.4	111680	6.5	111912	2.8	112901	5.5
110918	7.12	111280	3.5	111466	3.4	111681	6.5	111913	2.8	112904	5.6
110919	7.12	111281	3.5	111467	3.4	111682	6.5	111914	2.8	112906	5.4
110921	6.9	111282	3.5	111468	3.4	111684	6.5	111915	2.8	112911	5.4
110927	7.10	111285	3.7	111469	3.5	111685	6.5	111916	2.8	112912	5.4
110929	7.11	111287	3.7	111476	3.8	111686	6.5	111917	2.8	112913	5.4
110940	3.8	111288	3.7	111478	3.8	111687	6.5	111918	2.8	112914	5.4
110941	3.8	111289	3.7	111479	3.9	111688	6.5	111919	2.8	112915	5.5

Article number index

Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page
112916	5.4	113360	2.7	113782	7.4	113892	7.5	116323	6.11	117063	2.21
112917	5.4	113361	2.7	113783	7.4	113893	7.5	116324	6.11	117064	2.21
112918	5.4	113362	2.7	113784	7.4	113894	7.5	116325	6.11	117065	2.21
112919	5.4	113363	2.7	113785	7.4	113895	7.5	116326	6.11	117066	2.21
112920	5.6	113364	2.7	113786	7.4	113896	7.5	116327	6.11	117067	2.21
112921	5.6	113365	2.7	113787	7.4	113897	7.5	116328	6.11	117068	2.21
112922	5.6	113366	2.7	113788	7.4	116100	6.10	116329	6.11	117069	2.21
112950	5.4	113400	2.4	113791	7.4	116102	6.10	116330	6.11	117070	2.21
112954	5.4	113401	2.4	113792	7.4	116103	6.10	117000	2.20	117072	2.21
112955	5.4	113402	2.4	113793	7.4	116104	6.10	117001	2.20	117073	2.21
112957	5.4	113403	2.4	113794	7.4	116105	6.10	117003	2.20	117074	2.21
112958	5.4	113404	2.4	113795	7.4	116106	6.10	117004	2.20	117075	2.21
112959	5.4	113405	2.4	113796	7.4	116107	6.10	117005	2.20	117076	2.21
112971	5.5	113406	2.5	113797	7.4	116110	6.10	117006	2.20	117077	2.21
112972	5.5	113407	2.5	113798	7.4	116112	6.10	117007	2.20	117078	2.21
112973	5.5	113408	2.5	113801	7.4	116113	6.10	117008	2.20	117079	2.21
112974	5.5	113409	2.5	113802	7.4	116114	6.10	117009	2.20	117081	2.21
112975	5.5	113410	2.5	113803	7.4	116115	6.10	117010	2.20	117082	2.21
112976	5.5	113411	2.5	113804	7.4	116116	6.10	117012	2.20	117083	2.21
112977	5.5	113412	2.5	113805	7.4	116117	6.10	117013	2.20	117084	2.21
112978	5.5	113415	2.5	113806	7.4	116121	6.10	117014	2.20	117085	2.21
113300	2.6	113416	2.5	113807	7.4	116123	6.10	117015	2.20	117086	2.21
113301	2.6	113417	2.5	113808	7.4	116124	6.10	117016	2.20	117090	2.18
113302	2.6	113422	2.4	113810	7.4	116125	6.10	117017	2.20	117091	2.18
113303	2.6	113425	2.4	113811	7.4	116126	6.10	117018	2.20	117092	2.18
113304	2.6	113426	2.5	113812	7.4	116132	6.10	117019	2.20	117093	2.18
113305	2.6	113428	2.4	113813	7.4	116133	6.10	117021	2.20	117094	2.18
113306	2.6	113430	2.6	113814	7.4	116134	6.10	117022	2.20	117095	2.18
113307	2.6	113431	2.4	113815	7.4	116135	6.10	117023	2.20	117096	2.18
113308	2.6	113432	2.4	113816	7.4	116139	6.10	117024	2.20	117097	2.18
113309	2.6	113433	2.4	113817	7.4	116143	6.10	117025	2.20	117098	2.18
113310	2.6	113435	2.4	113818	7.4	116150	6.10	117026	2.20	117099	2.18
113311	2.6	113437	2.4	113820	7.4	116151	6.10	117027	2.17	117100	2.18
113312	2.6	113438	2.4	113821	7.4	116153	6.10	117028	2.17	117101	2.18
113313	2.6	113439	2.4	113822	7.4	116156	6.10	117029	2.17	117102	2.18
113314	2.6	113441	2.4	113823	7.4	116158	6.10	117030	2.17	117103	2.18
113315	2.6	113442	2.4	113824	7.4	116159	6.10	117031	2.17	117104	2.18
113316	2.6	113443	2.4	113825	7.4	116174	6.10	117032	2.17	117105	2.18
113317	2.6	113444	2.4	113826	7.4	116191	6.10	117033	2.17	117106	2.18
113318	2.7	113445	2.4	113827	7.4	116194	3.12	117034	2.17	117107	2.18
113319	2.7	113446	2.4	113860	7.5	116195	3.12	117035	2.17	117108	2.18
113320	2.7	113447	2.4	113861	7.5	116196	3.12	117036	2.17	117109	2.18
113321	2.7	113448	2.4	113862	7.5	116197	3.12	117037	2.17	117110	2.18
113322	2.7	113479	2.5	113863	7.5	116198	3.12	117038	2.17	117111	2.18
113323	2.7	113483	2.5	113864	7.5	116234	6.10	117039	2.17	117112	2.18
113324	2.6	113484	2.4	113865	7.5	116235	6.10	117040	2.17	117113	2.18
113325	2.6	113485	2.5	113868	7.5	116238	6.10	117041	2.17	117114	2.18
113328	2.6	113560	2.5	113869	7.5	116260	3.12	117042	2.17	117115	2.18
113331	2.7	113561	2.5	113870	7.5	116261	3.12	117043	2.17	117116	2.18
113332	2.7	113562	2.5	113871	7.5	116262	3.12	117044	2.17	117130	2.21
113339	2.7	113563	2.5	113872	7.5	116263	3.12	117045	2.17	117131	2.21
113340	2.7	113564	2.5	113873	7.5	116264	3.12	117046	2.17	117133	2.21
113341	2.7	113565	2.5	113874	7.5	116265	3.12	117047	2.17	117134	2.21
113342	2.7	113566	2.5	113876	7.5	116266	3.12	117048	2.17	117135	2.21
113344	2.7	113567	2.5	113877	7.5	116310	6.11	117049	2.17	117136	2.21
113345	2.6	113570	2.5	113878	7.5	116311	6.11	117050	2.17	117139	2.21
113346	2.7	113571	2.5	113879	7.5	116312	6.11	117051	2.17	117170	2.19
113347	2.6	113572	2.5	113880	7.5	116313	6.11	117052	2.17	117171	2.19
113350	2.7	113573	2.5	113881	7.5	116315	6.11	117053	2.17	117172	2.19
113351	2.7	113574	2.5	113884	7.5	116316	6.11	117054	2.17	117173	2.19
113352	2.7	113575	2.5	113885	7.5	116317	6.11	117055	2.17	117174	2.19
113353	2.7	113576	2.5	113886	7.5	116318	6.11	117056	2.17	117175	2.19
113354	2.7	113577	2.5	113887	7.5	116319	6.11	117060	2.21	117176	2.19
113355	2.7	113780	7.4	113888	7.5	116320	6.11	117061	2.21	117177	2.19
113356	2.7	113781	7.4	113889	7.5	116322	6.11	117062	2.21	117180	2.19

Article number index

Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page
117181	2.19	118408	7.11	118782	7.8	193051.1000	1.25	193264.1000	1.26	193793.1000	1.36
117182	2.19	118409	7.11	118783	7.8	193052.1000	1.25	193265.1000	1.26	193794.1000	1.38
117183	2.19	118410	7.11	118784	7.8	193053.1000	1.25	193266.1000	1.26	193804.1000	1.37
117184	2.19	118411	7.11	118785	7.8	193054.1000	1.25	193267.1000	1.26	193805.1000	1.37
117185	2.19	118412	7.12	118786	7.8	193055.1000	1.25	193268.1000	1.26	193806.1000	1.37
117186	2.19	118413	7.12	118787	7.8	193056.1000	1.25	193269.1000	1.26	193807.1000	1.37
117187	2.19	118414	7.12	118788	7.8	193057.1000	1.25	193270.1000	1.26	193808.1000	1.37
117190	2.19	118421	7.11	118792	7.8	193058.1000	1.25	193271.1000	1.26	193809.1000	1.37
117191	2.19	118427	7.11	118793	7.8	193059.1000	1.25	193620.1000	1.27	193811.1000	1.37
117192	2.19	118430	7.11	118794	7.8	193060.1000	1.25	193700.1000	1.32	193813.1000	1.37
117193	2.19	118438	7.11	118991	7.12	193061.1000	1.25	193702.1000	1.32	193814.1000	1.37
117194	2.19	118439	7.11	190003	1.42	193062.1000	1.25	193706.1000	1.38	193900.1000	1.28
117195	2.19	118442	7.14	190004	1.42	193063.1000	1.25	193707.1000	1.38	193901.1000	1.28
117196	2.19	118445	7.12	190005	1.42	193064.1000	1.25	193708.1000	1.38	193902.1000	1.28
117199	2.19	118466	7.11	190006	1.42	193065.1000	1.25	193709.1000	1.38	193903.1000	1.28
117201	2.19	118467	7.11	190007	1.42	193066.1000	1.25	193710.1000	1.38	193904.1000	1.28
117202	2.19	118471	7.12	190008	1.42	193067.1000	1.25	193711.1000	1.38	193905.1000	1.28
117203	2.19	118476	7.11	190009	1.42	193068.1000	1.25	193712.1000	1.32	193906.1000	1.28
117204	2.19	118481	7.11	190010	1.42	193069.1000	1.25	193713.1000	1.32	193910.1000	1.29
117205	2.19	118636	7.14	190012	1.42	193071.1000	1.25	193714.1000	1.38	193911.1000	1.29
117206	2.19	118685	3.13	190013	1.42	193072.1000	1.25	193715.1000	1.38	193912.1000	1.29
117207	2.19	118730	7.8	190014	1.42	193073.1000	1.25	193716.1000	1.38	193913.1000	1.29
117303	2.19	118733	7.8	190015	1.42	193074.1000	1.25	193717.1000	1.38	193920.1000	1.30
117304	2.16	118734	7.8	190016	1.42	193080.1000	1.25	193718.1000	1.38	193921.1000	1.30
117305	2.16	118735	7.8	190017	1.42	193140.1000	1.27	193728.1000	1.33	193930.1000	1.31
117306	2.16	118736	7.9	190018	1.42	193141.1000	1.27	193729.1000	1.33	193931.1000	1.31
117307	2.16	118739	7.9	190019	1.42	193142.1000	1.27	193730.1000	1.33	193932.1000	1.31
118004	7.14	118740	7.8	190559	1.42	193143.1000	1.27	193736.1000	1.32	193933.1000	1.31
118005	7.14	118741	7.8	190560	1.42	193144.1000	1.27	193737.1000	1.32	197455	1.39
118006	7.14	118742	7.9	190570	1.42	193145.1000	1.27	193738.1000	1.33	197456	1.39
118007	7.14	118747	7.9	192000.0100	1.40	193146.1000	1.27	193739.1000	1.33	197457	1.39
118008	7.14	118748	7.9	192010.0100	1.40	193147.1000	1.27	193740.1000	1.33	197458	1.39
118009	7.14	118749	7.9	192022.0100	1.40	193148.1000	1.27	193741.1000	1.32	197459	1.39
118010	7.14	118750	7.9	192030.0100	1.40	193149.1000	1.27	193744.1000	1.32	197460	1.39
118011	7.14	118751	7.9	192031.0100	1.40	193150.1000	1.27	193745.1000	1.32	197473	1.39
118012	7.14	118752	7.9	192032.0100	1.40	193151.1000	1.27	193746.1000	1.32	197474	1.39
118014	7.14	118753	7.9	192033.0100	1.40	193152.1000	1.27	193764.1000	1.34	197475	1.39
118035	3.13	118754	7.9	192050.0100	1.40	193153.1000	1.27	193765.1000	1.34	197476	1.39
118039	2.11	118755	7.9	192060.0100	1.40	193154.1000	1.27	193766.1000	1.34	197477	1.39
118042	2.11	118756	7.9	192100.0100	1.40	193164.1000	1.27	193767.1000	1.34	197478	1.39
118049	7.14	118757	7.9	192112.0100	1.40	193165.1000	1.27	193768.1000	1.34	197500	1.39
118070	7.14	118758	7.9	192130.0100	1.40	193240.1000	1.26	193769.1000	1.34	197501	1.39
118111	2.11	118759	7.9	192150.0100	1.40	193241.1000	1.26	193770.1000	1.34	197502	1.39
118160	7.14	118760	7.9	192201.0100	1.40	193242.1000	1.26	193771.1000	1.34	197503	1.39
118194	2.11	118761	7.9	192300.0100	1.40	193243.1000	1.26	193772.1000	1.34	197504	1.39
118195	7.13	118762	7.9	192700.0100	1.41	193244.1000	1.26	193773.1000	1.34	197505	1.39
118239	2.11	118763	7.9	192710.0100	1.41	193245.1000	1.26	193774.1000	1.35	198005.1000	1.12
118244	7.13	118764	7.9	192720.0100	1.41	193246.1000	1.26	193775.1000	1.35	198006.1000	1.14
118251	7.13	118765	7.9	192730.0100	1.41	193247.1000	1.26	193776.1000	1.35	198007.1000	1.13
118252	7.13	118766	7.9	192740.0100	1.41	193248.1000	1.26	193777.1000	1.35	198010.1000	1.12
118295	7.12	118767	7.9	193000.1000	1.27	193249.1000	1.26	193778.1000	1.35	198011.1000	1.14
118297	7.13	118768	7.9	193001.1000	1.27	193250.1000	1.26	193779.1000	1.35	198012.1000	1.13
118298	7.12	118769	7.9	193020.1000	1.25	193251.1000	1.26	193780.1000	1.35	198015.1000	1.18
118299	7.12	118770	7.8	193034.1000	1.27	193252.1000	1.26	193781.1000	1.35	198020.1000	1.18
118300	7.12	118771	7.8	193040.1000	1.25	193253.1000	1.26	193782.1000	1.35	198025.1000	1.12
118320	7.12	118772	7.8	193041.1000	1.25	193254.1000	1.26	193783.1000	1.35	198026.1000	1.14
118322	7.13	118773	7.8	193042.1000	1.25	193255.1000	1.26	193784.1000	1.36	198027.1000	1.13
118349	7.12	118774	7.8	193043.1000	1.25	193256.1000	1.26	193785.1000	1.36	198030.1000	1.18
118377	8.5	118775	7.8	193044.1000	1.25	193257.1000	1.26	193786.1000	1.36	198035.1000	1.16
118383	2.10	118776	7.8	193045.1000	1.25	193258.1000	1.26	193787.1000	1.36	198040.1000	1.16
118384	2.10	118777	7.8	193046.1000	1.25	193259.1000	1.26	193788.1000	1.36	198045.1000	1.16
118389	6.8	118778	7.8	193047.1000	1.27	193260.1000	1.26	193789.1000	1.36	198050.1000	1.16
118393	2.10	118779	7.8	193048.1000	1.25	193261.1000	1.26	193790.1000	1.36	198055.1000	1.16
118406	7.11	118780	7.8	193049.1000	1.25	193262.1000	1.26	193791.1000	1.36	198060.1000	1.16
118407	7.11	118781	7.8	193050.1000	1.25	193263.1000	1.26	193792.1000	1.36	198075.1000	1.8

Article number index

Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page
198076.1000	1.11	198301.1000	1.17	198511.1000	1.11	270051	10.81	272101	10.50	272216	10.53
198077.1000	1.10	198302.1000	1.17	198512.1000	1.10	270052	10.81	272102	10.50	272217	10.53
198080.1000	1.8	198303.1000	1.17	198530.1000	1.8	270053	10.81	272103	10.50	272218	10.53
198081.1000	1.11	198304.1000	1.17	198531.1000	1.11	270054	10.81	272104	10.50	272219	10.53
198082.1000	1.10	198305.1000	1.17	198532.1000	1.10	270055	10.81	272105	10.50	272230	10.54
198085.1000	1.8	198306.1000	1.17	198540.1000	1.8	270056	10.81	272106	10.50	272231	10.54
198086.1000	1.11	198307.1000	1.17	198541.1000	1.11	270057	10.81	272107	10.50	272232	10.54
198087.1000	1.10	198308.1000	1.17	198542.1000	1.10	270058	10.81	272108	10.50	272233	10.54
198090.1000	1.8	198310.1000	1.9	198560.1000	1.8	270059	10.85	272109	10.50	272234	10.54
198091.1000	1.11	198311.1000	1.9	198561.1000	1.11	270060	10.85	272120	10.50	272235	10.54
198092.1000	1.10	198312.1000	1.9	198562.1000	1.10	270061	10.85	272121	10.50	272236	10.54
198095.1000	1.8	198313.1000	1.9	198570.1000	1.8	270062	10.85	272122	10.50	272237	10.54
198096.1000	1.11	198314.1000	1.9	198571.1000	1.11	270063	10.85	272123	10.50	272240	10.54
198097.1000	1.10	198315.1000	1.9	198572.1000	1.10	270064	10.85	272124	10.50	272241	10.54
198100.1000	1.8	198316.1000	1.9	198580.1000	1.8	270065	10.85	272125	10.50	272242	10.54
198101.1000	1.11	198317.1000	1.17	198581.1000	1.11	270066	10.85	272126	10.50	272243	10.54
198102.1000	1.10	198318.1000	1.17	198582.1000	1.10	270067	10.85	272127	10.50	272244	10.54
198105.1000	1.21	198319.1000	1.17	198628.1000	1.19	270068	10.85	272128	10.50	272245	10.54
198110.1000	1.19	198326.1000	1.5	198629.1000	1.20	270069	10.85	272129	10.50	272246	10.54
198111.1000	1.20	198327.1000	1.5	198700.1000	1.21	270080	10.86	272140	10.51	272247	10.54
198115.1000	1.8	198328.1000	1.5	198701.1000	1.22	270081	10.86	272141	10.51	272250	10.55
198116.1000	1.11	198329.1000	1.5	198730.1000	1.12	270082	10.86	272142	10.51	272251	10.55
198117.1000	1.10	198330.1000	1.5	198731.1000	1.14	270083	10.86	272143	10.51	272252	10.55
198120.1000	1.19	198331.1000	1.5	198732.1000	1.13	270084	10.86	272144	10.51	272253	10.55
198121.1000	1.20	198332.1000	1.5	198740.1000	1.21	270085	10.86	272145	10.51	272254	10.55
198130.1000	1.19	198333.1000	1.6	198741.1000	1.22	270086	10.86	272146	10.51	272255	10.55
198131.1000	1.20	198334.1000	1.6	198765.1000	1.18	270099	10.88	272147	10.51	272256	10.55
198135.1000	1.15	198335.1000	1.6	198790.1000	1.12	270115	10.82	272160	10.51	272257	10.55
198140.1000	1.19	198336.1000	1.6	198791.1000	1.14	270116	10.82	272161	10.51	272258	10.55
198141.1000	1.20	198337.1000	1.6	198792.1000	1.13	270117	10.82	272162	10.51	272259	10.55
198145.1000	1.15	198338.1000	1.6	198800.1000	1.12	270118	10.82	272163	10.51	272260	10.56
198150.1000	1.19	198339.1000	1.6	198801.1000	1.14	270125	10.83	272164	10.51	272261	10.56
198151.1000	1.20	198340.1000	1.7	198802.1000	1.13	270126	10.83	272165	10.51	272262	10.56
198160.1000	1.21	198341.1000	1.7	198820.1000	1.18	270127	10.83	272166	10.51	272263	10.56
198161.1000	1.20	198342.1000	1.7	198830.1000	1.19	270128	10.83	272167	10.51	272264	10.56
198165.1000	1.15	198343.1000	1.7	198831.1000	1.20	270130	10.85	272171	10.52	272265	10.56
198170.1000	1.19	198344.1000	1.7	198850.1000	1.19	270131	10.85	272172	10.52	272266	10.56
198171.1000	1.20	198345.1000	1.7	198851.1000	1.20	270132	10.85	272173	10.52	272267	10.56
198175.1000	1.15	198346.1000	1.7	198870.1000	1.8	270133	10.85	272174	10.52	272268	10.56
198185.1000	1.15	198360.1000	1.16	198871.1000	1.11	270134	10.85	272175	10.52	272269	10.56
198191.1000	1.19	198370.1000	1.16	198880.1000	1.8	270135	10.85	272176	10.52	272270	10.56
198192.1000	1.20	198380.1000	1.16	198881.1000	1.11	270136	10.85	272177	10.52	272271	10.56
198200.1000	1.19	198390.1000	1.16	198890.1000	1.23	270137	10.85	272181	10.52	272272	10.56
198201.1000	1.20	198400.1000	1.16	198891.1000	1.24	270281	10.84	272182	10.52	272273	10.56
198210.1000	1.19	198410.1000	1.16	198900.1000	1.23	270283	10.84	272183	10.52	272276	10.68
198211.1000	1.20	198420.1000	1.16	198901.1000	1.24	270285	10.84	272184	10.52	272277	10.68
198220.1000	1.19	198430.1000	1.16	198910.1000	1.23	270286	10.84	272185	10.52	272278	10.68
198221.1000	1.20	198440.1000	1.16	198911.1000	1.24	270401	10.77	272186	10.52	272279	10.68
198225.1000	1.15	198450.1000	1.16	198950.1000	1.16	270402	10.77	272187	10.52	272280	10.56
198230.1000	1.19	198460.1000	1.8	198980.1000	1.16	270403	10.77	272200	10.53	272281	10.56
198231.1000	1.20	198461.1000	1.11	198985.1000	1.18	270405	10.77	272201	10.53	272282	10.56
198240.1000	1.19	198462.1000	1.10	198990.1000	1.12	270406	10.77	272202	10.53	272283	10.56
198241.1000	1.20	198470.1000	1.8	198991.1000	1.14	271100	10.79	272203	10.53	272284	10.56
198250.1000	1.19	198471.1000	1.11	198992.1000	1.13	271101	10.79	272204	10.53	272285	10.56
198251.1000	1.20	198472.1000	1.10	198995.1000	1.18	271102	10.79	272205	10.53	272286	10.56
198260.1000	1.19	198480.1000	1.8	270030	10.80	271103	10.79	272206	10.53	272287	10.56
198261.1000	1.20	198481.1000	1.11	270031	10.80	271104	10.79	272207	10.53	272288	10.56
198270.1000	1.19	198482.1000	1.10	270032	10.80	271105	10.79	272208	10.53	272289	10.56
198271.1000	1.20	198490.1000	1.8	270034	10.80	271106	10.79	272209	10.53	272290	10.56
198280.1000	1.19	198491.1000	1.11	270035	10.80	271107	10.79	272210	10.53	272291	10.56
198281.1000	1.20	198492.1000	1.10	270036	10.80	271249	10.78	272211	10.53	272292	10.56
198290.1000	1.19	198500.1000	1.8	270037	10.80	271250	10.78	272212	10.53	272293	10.56
198291.1000	1.20	198501.1000	1.11	270038	10.80	271251	10.78	272213	10.53	272300	10.57
198295.1000	1.21	198502.1000	1.10	270039	10.80	271254	10.78	272214	10.53	272301	10.57
198300.1000	1.17	198510.1000	1.8	270050	10.81	272100	10.50	272215	10.53	272302	10.57

Article number index

Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page
272303	10.57	272436	10.61	272686	10.69	272911	10.65	331000	11.13	424006	9.51
272304	10.57	272437	10.61	272687	10.69	272912	10.65	331001	11.13	424010	9.51
272305	10.57	272438	10.61	272688	10.69	272913	10.65	331002	11.13	424015	9.51
272306	10.57	272444	10.61	272700	10.58	272914	10.65	331003	11.13	424020	9.51
272307	10.57	272445	10.61	272701	10.58	272919	10.65	331004	11.13	424050	9.51
272308	10.57	272446	10.61	272702	10.58	272920	10.65	346109.0010	11.12	428003	9.48
272309	10.57	272447	10.61	272703	10.58	272921	10.65	346110.0010	11.12	428006	9.48
272310	10.57	272448	10.61	272704	10.58	272922	10.65	346111.0010	11.12	428010	9.48
272311	10.57	272553	10.63	272705	10.58	272923	10.65	346112.0010	11.11	428015	9.48
272320	10.57	272554	10.63	272706	10.58	272924	10.65	346113.0010	11.11	428020	9.48
272321	10.57	272555	10.63	272707	10.58	272929	10.65	346114.0010	11.12	428050	9.48
272322	10.57	272556	10.63	272708	10.58	272930	10.65	346116.0010	11.11	429003	9.48
272323	10.57	272557	10.63	272709	10.58	272958	10.66	346123.0010	11.11	429006	9.48
272324	10.57	272558	10.63	272710	10.58	272959	10.66	346732	10.93	429010	9.48
272325	10.57	272573	10.63	272711	10.58	272960	10.66	346733	10.93	429015	9.48
272326	10.57	272574	10.63	272712	10.58	272961	10.66	346812	11.3	429020	9.48
272327	10.57	272575	10.63	272713	10.58	272962	10.66	346813	11.5	429050	9.48
272328	10.57	272576	10.63	272720	10.58	272963	10.66	346814.0010	11.6	431003	9.53
272329	10.57	272577	10.63	272721	10.58	272968	10.66	346860.0002	11.4	431006	9.53
272330	10.57	272578	10.63	272722	10.58	272969	10.66	400050	9.8	431010	9.53
272331	10.57	272593	10.63	272723	10.58	272970	10.66	400100	9.8	431015	9.53
272360	10.60	272594	10.63	272724	10.58	272971	10.66	402050	9.8	431020	9.53
272361	10.60	272595	10.63	272725	10.58	272972	10.66	402100	9.8	431050	9.53
272362	10.60	272596	10.63	272726	10.58	272973	10.66	403001.0700	9.12	435003	9.54
272363	10.60	272597	10.63	272727	10.58	274500	10.71	407050	9.9	435006	9.54
272364	10.60	272598	10.63	272728	10.58	274501	10.71	407100	9.9	435010	9.54
272365	10.60	272613	10.63	272729	10.58	274502	10.71	409050	9.9	435015	9.54
272366	10.60	272614	10.63	272730	10.58	274503	10.71	409100	9.9	435020	9.54
272367	10.60	272615	10.63	272731	10.58	274504	10.71	410003	9.45	435050	9.54
272370	10.60	272616	10.63	272732	10.58	274505	10.71	410006	9.45	436003	9.56
272371	10.60	272617	10.63	272733	10.58	274506	10.71	410010	9.45	436006	9.56
272372	10.60	272618	10.63	272742	10.59	274507	10.71	410015	9.45	436010	9.56
272373	10.60	272634	10.67	272744	10.59	274510	10.71	410020	9.45	436015	9.56
272374	10.60	272635	10.67	272745	10.59	274511	10.71	410050	9.45	436020	9.56
272375	10.60	272636	10.67	272746	10.59	274512	10.71	411003	9.46	436050	9.56
272376	10.60	272637	10.67	272747	10.59	274513	10.71	411006	9.46	438003	9.57
272377	10.60	272638	10.67	272748	10.59	274514	10.71	411010	9.46	438006	9.57
272380	10.60	272639	10.68	272752	10.59	274515	10.71	411015	9.46	438010	9.57
272381	10.60	272640	10.68	272754	10.59	274516	10.71	411020	9.46	438015	9.57
272382	10.60	272644	10.67	272755	10.59	274517	10.71	411050	9.46	438020	9.57
272383	10.60	272645	10.67	272756	10.59	274518	10.71	415020	9.27	438050	9.57
272384	10.60	272646	10.67	272757	10.59	274520	10.72	415050	9.27	439003	9.56
272385	10.60	272647	10.67	272758	10.59	274521	10.72	415100	9.27	439006	9.56
272386	10.60	272648	10.67	272763	10.64	274522	10.72	416020	9.29	439010	9.56
272387	10.60	272649	10.68	272764	10.64	274523	10.72	416050	9.29	439015	9.56
272390	10.60	272650	10.68	272765	10.64	274524	10.72	416100	9.29	439020	9.56
272391	10.60	272651	10.70	272766	10.64	274525	10.72	418003	9.50	439050	9.56
272392	10.60	272652	10.70	272767	10.64	274526	10.72	418006	9.50	440003	9.51
272393	10.60	272653	10.70	272768	10.64	274527	10.72	418010	9.50	440006	9.51
272394	10.60	272654	10.70	272773	10.64	274528	10.72	418015	9.50	440010	9.51
272395	10.60	272655	10.70	272774	10.64	274529	10.72	418020	9.50	440015	9.51
272396	10.60	272656	10.70	272775	10.64	274533	10.72	418050	9.50	440020	9.51
272397	10.60	272661	10.70	272776	10.64	274534	10.72	420003	9.49	440050	9.51
272414	10.61	272662	10.70	272777	10.64	274535	10.72	420006	9.49	441003	9.57
272415	10.61	272663	10.70	272778	10.64	274536	10.72	420010	9.49	441006	9.57
272416	10.61	272664	10.70	272814	10.62	274537	10.72	420015	9.49	441010	9.57
272417	10.61	272665	10.70	272815	10.62	274538	10.72	420020	9.49	441015	9.57
272418	10.61	272666	10.70	272816	10.62	274539	10.72	420050	9.49	441020	9.57
272424	10.61	272674	10.69	272817	10.62	330068	11.10	422003	9.47	441050	9.57
272425	10.61	272675	10.69	272818	10.62	330071	11.8	422006	9.47	442003	9.49
272426	10.61	272676	10.69	272824	10.62	330072	11.8	422010	9.47	442006	9.49
272427	10.61	272677	10.69	272825	10.62	330073	11.8	422015	9.47	442010	9.49
272428	10.61	272678	10.69	272826	10.62	330074	11.10	422020	9.47	442015	9.49
272434	10.61	272684	10.69	272827	10.62	330088	11.9	422050	9.47	442020	9.49
272435	10.61	272685	10.69	272828	10.62	330089	11.7	424003	9.51	442050	9.49

Article number index

Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page
443020	9.41	458710	9.35	475506	9.24	490050	9.66	496903	9.19	600092	10.43
443050	9.41	458802	9.39	475510	9.24	490051	9.66	496905	9.19	600093	10.43
443100	9.41	458805	9.39	475515	9.24	490052	9.66	496906	9.19	600094	10.43
445003	9.55	458810	9.39	475520	9.24	490053	9.66	496907	9.19	600095	10.43
445006	9.55	458902	9.43	475550	9.24	490054	9.66	496908	9.19	600096	10.43
445010	9.55	458905	9.43	475702	9.14	490057	9.58	496910	9.19	600097	10.43
445015	9.55	458910	9.43	475705	9.14	490059	9.58	496915	9.19	600100	10.28
445020	9.55	459203	9.52	475710	9.14	490060	9.71	496920	9.19	600101	10.28
445050	9.55	459206	9.52	475802	9.15	490061	9.71	496930	9.19	600102	10.28
447020	9.25	459210	9.52	475805	9.15	490062	9.71	496950	9.19	600103	10.28
447050	9.25	459215	9.52	475810	9.15	490063	9.71	499988	9.77	600104	10.28
447100	9.25	459220	9.52	475903	9.16	490064	9.70	499989	9.76	600105	10.28
456002	9.34	459250	9.52	475905	9.16	490065	9.70	499991	9.73	600106	10.28
456005	9.34	462020	9.40	475910	9.16	490066	9.70	499992	9.73	600120	10.45
456010	9.34	462050	9.40	475915	9.16	490067	9.70	499993	9.77	600170	10.25
456102	9.34	462100	9.40	475920	9.16	490068	9.70	499994	9.76	600171	10.25
456105	9.34	464020	9.40	475930	9.16	490069	9.70	499995	9.77	600172	10.25
456110	9.34	464050	9.40	475950	9.16	490070	9.60	499996	9.77	600173	10.25
456202	9.35	464100	9.40	476020	9.31	490071	9.61	600001	10.30	600174	10.25
456205	9.35	465020	9.36	476050	9.31	490072	9.67	600002	10.30	600175	10.25
456210	9.35	465050	9.36	476100	9.31	490073	9.67	600003	10.30	600176	10.25
456302	9.38	465100	9.36	477020	9.37	490074	9.68	600004	10.30	600177	10.25
456305	9.38	466020	9.36	477050	9.37	490076	9.73	600005	10.30	600201	10.43
456310	9.38	466050	9.36	477100	9.37	490077	9.66	600006	10.30	600202	10.43
456402	9.38	466100	9.36	478020	9.37	490078	9.73	600011	10.31	600203	10.43
456405	9.38	467003	9.50	478050	9.37	490079	9.73	600012	10.31	600204	10.43
456410	9.38	467006	9.50	478100	9.37	490080	9.73	600013	10.31	600205	10.43
456502	9.39	467010	9.50	479020	9.41	490081	9.73	600014	10.31	600206	10.43
456505	9.39	467015	9.50	479050	9.41	490082	9.72	600015	10.31	600207	10.43
456510	9.39	467020	9.50	479100	9.41	490083	9.72	600016	10.31	600208	10.43
456602	9.42	467050	9.50	481020	9.27	490084	9.72	600020	10.30	600220	10.39
456605	9.42	468020	9.44	481050	9.27	490085	9.72	600021	10.30	600221	10.39
456610	9.42	468050	9.44	481100	9.27	490095	9.69	600022	10.30	600222	10.39
456702	9.42	468100	9.44	482020	9.33	490105	9.75	600023	10.30	600223	10.39
456705	9.42	469020	9.44	482050	9.33	490106	9.75	600028	10.34	600224	10.39
456710	9.42	469050	9.44	482100	9.33	490107	9.75	600050	10.29	600225	10.39
456802	9.43	469100	9.44	486020	9.25	490108	9.75	600051	10.29	600226	10.39
456805	9.43	471020	9.32	486050	9.25	490123	9.59	600052	10.29	600227	10.39
456810	9.43	471050	9.32	486100	9.25	490124	9.59	600053	10.29	600228	10.39
457503	9.52	471100	9.32	487003	9.45	490125	9.59	600054	10.29	600229	10.39
457506	9.52	472020	9.32	487006	9.45	490126	9.59	600055	10.29	600230	10.39
457510	9.52	472050	9.32	487010	9.45	490127	9.13	600056	10.29	600231	10.39
457515	9.52	472100	9.32	487015	9.45	491000	9.7	600057	10.29	600232	10.39
457520	9.52	473020	9.33	487020	9.45	491002	9.10	600058	10.29	600241	10.36
457550	9.52	473050	9.33	487050	9.45	491003	9.11	600059	10.29	600243	10.36
458102	9.26	473100	9.33	488003	9.46	491004	9.10	600060	10.34	600245	10.36
458105	9.26	474020	9.29	488006	9.46	491005	9.11	600061	10.34	600246	10.36
458110	9.26	474050	9.29	488010	9.46	491075	9.74	600062	10.34	600248	10.36
458202	9.26	474100	9.29	488015	9.46	492075	9.74	600063	10.34	600249	10.36
458205	9.26	475002	9.20	488020	9.46	493005	9.5	600064	10.34	600261	10.37
458210	9.26	475005	9.20	488050	9.46	493010	9.5	600065	10.34	600263	10.37
458302	9.28	475010	9.20	490011	9.61	493105	9.5	600066	10.34	600265	10.37
458305	9.28	475203	9.21	490012	9.61	493110	9.5	600067	10.34	600266	10.37
458310	9.28	475206	9.21	490014	9.63	493205	9.5	600080	10.32	600268	10.37
458402	9.28	475210	9.21	490015	9.63	493305	9.6	600081	10.32	600269	10.37
458405	9.28	475215	9.21	490017	9.60	493310	9.6	600082	10.32	600280	10.40
458410	9.28	475220	9.21	490018	9.60	493405	9.6	600083	10.32	600281	10.40
458502	9.30	475250	9.21	490020	9.62	493410	9.6	600084	10.32	600282	10.40
458505	9.30	475302	9.22	490021	9.62	493810	9.5	600085	10.32	600283	10.40
458510	9.30	475305	9.22	490026	9.65	496702	9.17	600086	10.32	600284	10.40
458602	9.30	475310	9.22	490028	9.64	496705	9.17	600087	10.32	600285	10.40
458605	9.30	475402	9.23	490029	9.64	496710	9.17	600088	10.32	600286	10.40
458610	9.30	475405	9.23	490035	9.58	496802	9.18	600089	10.32	600290	10.32
458702	9.35	475410	9.23	490037	9.58	496805	9.18	600090	10.43	600291	10.32
458705	9.35	475503	9.24	490038	9.65	496810	9.18	600091	10.43	600292	10.32


Article number index

Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page
600293	10.32	600426	10.75	600544	10.44	600645	10.44	600726	10.14	600865	10.12
600294	10.32	600427	10.75	600545	10.44	600646	10.44	600727	10.14	600866	10.12
600295	10.32	600428	10.75	600546	10.44	600647	10.44	600730	10.24	600867	10.12
600296	10.32	600429	10.75	600550	10.18	600648	10.44	600731	10.24	600868	10.12
600297	10.32	600430	10.74	600551	10.18	600649	10.44	600732	10.24	600869	10.12
600320	10.9	600431	10.74	600552	10.18	600651	10.44	600733	10.24	600870	10.22
600321	10.10	600432	10.74	600553	10.18	600652	10.44	600734	10.24	600871	10.22
600347	10.8	600433	10.74	600554	10.18	600653	10.44	600735	10.24	600872	10.22
600351	10.21	600434	10.74	600555	10.18	600654	10.44	600736	10.24	600873	10.22
600352	10.21	600435	10.74	600556	10.18	600655	10.44	600737	10.24	600874	10.22
600353	10.21	600436	10.74	600557	10.18	600656	10.44	600738	10.24	600875	10.22
600354	10.21	600437	10.74	600558	10.18	600660	10.12	600739	10.24	600876	10.22
600355	10.21	600438	10.74	600559	10.18	600661	10.12	600741	10.35	600877	10.22
600356	10.21	600439	10.74	600560	10.18	600662	10.12	600742	10.35	600900	10.15
600357	10.21	600460	10.38	600561	10.18	600663	10.12	600743	10.35	600901	10.15
600358	10.21	600461	10.38	600562	10.18	600664	10.12	600744	10.35	600902	10.15
600359	10.21	600462	10.38	600563	10.18	600665	10.12	600745	10.35	600903	10.15
600360	10.21	600463	10.38	600564	10.18	600666	10.12	600746	10.35	600905	10.15
600361	10.75	600464	10.38	600565	10.18	600667	10.12	600748	10.35	600906	10.15
600362	10.75	600465	10.38	600566	10.18	600668	10.12	600749	10.35	600907	10.15
600363	10.75	600466	10.38	600567	10.18	600669	10.12	600751	10.35	600908	10.15
600364	10.75	600467	10.38	600568	10.18	600670	10.13	600752	10.35	600920	10.27
600365	10.75	600490	10.22	600569	10.18	600671	10.13	600753	10.35	600921	10.27
600366	10.75	600491	10.22	600570	10.18	600672	10.13	600760	10.23	600922	10.27
600367	10.75	600492	10.22	600590	10.43	600673	10.13	600761	10.23	600923	10.27
600368	10.75	600493	10.22	600591	10.43	600674	10.13	600762	10.23	600924	10.27
600370	10.26	600494	10.22	600592	10.43	600675	10.13	600763	10.23	600925	10.27
600371	10.26	600495	10.22	600593	10.43	600676	10.13	600780	10.24	600926	10.27
600372	10.26	600496	10.22	600594	10.43	600677	10.13	600781	10.24	600927	10.27
600373	10.26	600497	10.22	600595	10.43	600678	10.13	600782	10.24	600991	10.13
600374	10.26	600500	10.40	600596	10.43	600679	10.13	600783	10.24	601000	10.41
600375	10.26	600501	10.40	600597	10.43	600680	10.11	600790	10.11	601001	10.41
600376	10.26	600502	10.40	600600	10.20	600681	10.11	600791	10.11	601002	10.41
600377	10.26	600503	10.40	600601	10.20	600682	10.11	600792	10.11	601003	10.41
600391	10.73	600504	10.40	600602	10.20	600683	10.11	600830	10.74	601004	10.41
600392	10.73	600506	10.40	600603	10.20	600684	10.11	600831	10.74	601005	10.41
600393	10.73	600507	10.40	600604	10.19	600690	10.13	600832	10.74	601006	10.41
600394	10.73	600508	10.40	600605	10.19	600691	10.13	600833	10.74	601007	10.41
600395	10.73	600510	10.40	600606	10.19	600692	10.13	600834	10.74	601008	10.41
600396	10.73	600511	10.40	600607	10.19	600693	10.13	600835	10.74	601010	10.41
600398	10.73	600512	10.40	600611	10.33	600698	10.73	600836	10.74	601021	10.42
600400	10.39	600513	10.40	600612	10.33	600701	10.23	600837	10.74	601022	10.42
600401	10.39	600520	10.25	600613	10.33	600702	10.23	600838	10.74	601023	10.42
600402	10.39	600521	10.25	600614	10.33	600703	10.23	600839	10.74	601024	10.42
600403	10.39	600522	10.25	600615	10.33	600704	10.23	600840	10.11	601025	10.42
600404	10.39	600523	10.25	600616	10.33	600705	10.24	600841	10.11	601026	10.42
600405	10.39	600524	10.25	600626	10.44	600706	10.24	600842	10.11	601027	10.42
600406	10.39	600525	10.25	600627	10.44	600707	10.24	600843	10.11	601028	10.42
600407	10.39	600526	10.25	600628	10.44	600708	10.24	600844	10.11	601050	10.28
600408	10.39	600527	10.25	600629	10.44	600710	10.23	600845	10.11	601051	10.28
600409	10.39	600528	10.25	600630	10.44	600711	10.23	600846	10.11	601052	10.28
600410	10.39	600529	10.25	600631	10.44	600712	10.23	600847	10.11	601053	10.28
600411	10.39	600530	10.38	600632	10.44	600713	10.23	600850	10.73	601054	10.28
600412	10.39	600531	10.38	600633	10.44	600714	10.23	600851	10.73	601071	10.16
600413	10.39	600532	10.38	600634	10.44	600715	10.23	600852	10.73	601072	10.16
600414	10.39	600533	10.38	600635	10.44	600716	10.23	600853	10.73	601073	10.16
600415	10.39	600534	10.38	600636	10.44	600717	10.23	600854	10.73	601074	10.16
600416	10.39	600535	10.38	600637	10.44	600718	10.23	600855	10.73	601080	10.29
600417	10.39	600536	10.38	600638	10.44	600719	10.23	600856	10.73	601081	10.29
600420	10.75	600537	10.38	600639	10.44	600720	10.14	600857	10.73	601082	10.29
600421	10.75	600538	10.38	600640	10.44	600721	10.14	600860	10.12	601083	10.29
600422	10.75	600539	10.38	600641	10.44	600722	10.14	600861	10.12	601084	10.29
600423	10.75	600541	10.44	600642	10.44	600723	10.14	600862	10.12	601085	10.29
600424	10.75	600542	10.44	600643	10.44	600724	10.14	600863	10.12	601086	10.29
600425	10.75	600543	10.44	600644	10.44	600725	10.14	600864	10.12	601087	10.29

Article number index

Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page
601088	10.29	680000	10.93	681306	10.96	681505	10.97				
601089	10.29	680005	10.93	681307	10.96	681506	10.97				
601091	10.17	680017	10.93	681308	10.96	681507	10.97				
601092	10.17	680018	10.93	681309	10.96	681508	10.97				
601093	10.17	680020	10.93	681310	10.99	681509	10.97				
601094	10.17	680021	10.93	681311	10.98	681523	10.97				
601490	10.22	680100	10.91	681312	10.98	681530	10.97				
601491	10.22	680101	10.91	681313	10.98	681531	10.97				
601492	10.22	680102	10.91	681314	10.98	681532	10.97				
601493	10.22	680105	10.91	681315	10.98	681536	10.97				
601494	10.22	680106	10.91	681316	10.100	681537	10.97				
601495	10.22	680107	10.91	681318	10.100	681538	10.97				
601496	10.22	680108	10.91	681323	10.96	681539	10.97				
601497	10.22	680112	10.92	681330	10.96	A					
601720	10.14	680113	10.92	681331	10.96	A1161004	6.12				
601721	10.14	680150	10.90	681332	10.96	A1161204	6.12				
601722	10.14	680151	10.90	681336	10.96	A1161404	6.12				
601723	10.14	680152	10.90	681337	10.96	A1161604	6.12				
601724	10.14	680153	10.90	681338	10.96	A1161804	6.12				
601725	10.14	680154	10.90	681339	10.96	A3211405	6.14				
601726	10.14	680156	10.90	681400	10.96	A3211603	6.14				
601727	10.14	680157	10.90	681401	10.96	A3211605	6.14				
606001	10.7	680158	10.90	681402	10.96	A3211803	6.14				
606002	10.7	680159	10.90	681403	10.96	A3211805	6.14				
606003	10.7	680169	10.89	681404	10.96	A3211807	6.14				
606004	10.7	680170	10.89	681405	10.96	A3221204	6.13				
606005	10.7	680171	10.89	681406	10.96	A3221403	6.13				
606006	10.7	680418	10.99	681407	10.96	A3221404	6.13				
606007	10.7	680419	10.99	681408	10.96	A3221603	6.13				
606038	10.7	680420	10.101	681409	10.96	A3221604	6.13				
606040	10.7	680424	10.99	681410	10.96	A3221605	6.13				
606050	10.7	680428	10.99	681411	10.96	A3221607	6.13				
606051	10.7	680429	10.99	681412	10.96	A3221803	6.13				
606150	10.6	680500	10.87	681413	10.96	A3221804	6.13				
606151	10.6	680571	10.87	681414	10.96	A3221805	6.13				
606152	10.6	680572	10.87	681415	10.96	A3221807	6.13				
606153	10.6	680573	10.87	681416	10.96	A3221812	6.13				
606154	10.6	680574	10.87	681417	10.96						
606155	10.6	680575	10.87	681418	10.96						
606156	10.6	680576	10.87	681419	10.96						
606157	10.6	681001	10.102	681420	10.96						
606158	10.6	681002	10.102	681421	10.96						
606159	10.6	681008	10.103	681422	10.96						
606160	10.6	681009	10.103	681423	10.96						
606200	10.6	681010	10.103	681425	10.96						
606201	10.6	681011	10.103	681426	10.96						
606202	10.6	681012	10.103	681427	10.96						
606203	10.6	681014	10.94	681428	10.96						
606204	10.6	681017	10.103	681429	10.96						
606205	10.6	681018	10.103	681430	10.96						
606206	10.6	681019	10.103	681431	10.96						
606207	10.6	681032	10.100	681432	10.96						
606208	10.6	681033	10.100	681433	10.96						
606209	10.6	681034	10.100	681434	10.96						
606250	10.6	681090	10.95	681435	10.96						
606251	10.6	681110	10.94	681436	10.96						
606252	10.6	681111	10.94	681437	10.96						
606253	10.6	681112	10.94	681438	10.96						
606254	10.6	681113	10.94	681439	10.96						
606255	10.6	681300	10.96	681441	10.96						
606256	10.6	681301	10.96	681500	10.97						
606257	10.6	681302	10.96	681501	10.97						
606258	10.6	681303	10.96	681502	10.97						
606259	10.6	681304	10.96	681503	10.97						
606260	10.6	681305	10.96	681504	10.97						

Notes

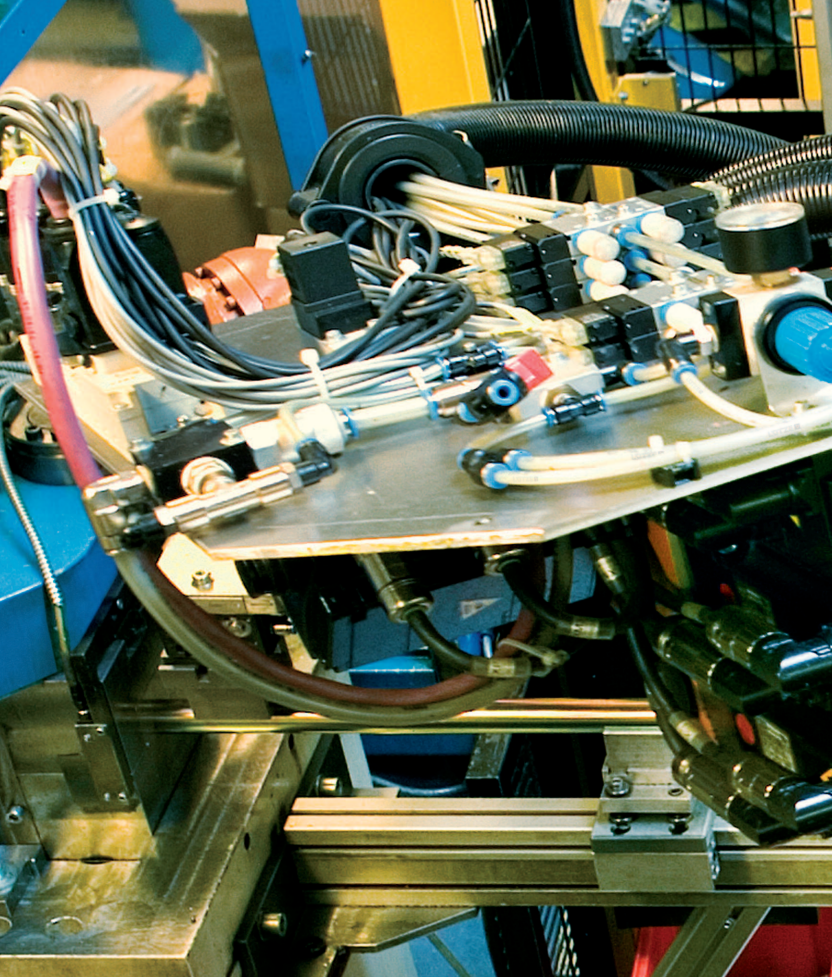

LÜTZE Conversion Guide

mm² - AWG

Length: Metric - US (Imperial)

Temperature conversion

Weight conversion

Interpretation of European
cable construction and shielding brackets



Conversion Guide

How to convert mm² to AWG?

mm ²	AWG
0.05	30
0.08	28
0.14	26
0.25	24
0.34	22
0.5	20
0.75	19
1	18
1.5	16
2.5	14
4	12
6	10
10	8
16	6
25	4
35	2
50	1
54	1/0
70	2/0
95	3/0
120	4/0
150	300 MCM
185	350 MCM
240	500 MCM
300	600 MCM

Length Metric - US (Imperial)

Metric measurement	US (Imperial) measurement
1 millimeter (mm)	0.03937"
1 centimeter (cm)	0.3937"
1 meter (m)	3.28 ft
1 kilometer (km)	3,280 ft
1 kilogram (kg)	2.2 lbs
1 gram (g)	0.0353 ounces

Temperature

-40°C	-40°F
-30°C	-22°F
-25°C	-13°F
-20°C	-4°F
-15°C	+5°F
-10°C	+14°F
-5°C	+23°F
0°C	+32°F
+70°C	+158°F
+80°C	+176°F
+85°C	+185°F
+90°C	+194°F

Weight Conversion

kg/100m to lbs/Mft: $x \text{ kg}/100\text{m} \times 6.7 = \text{lbs}/\text{Mft}$

Example:

$5 \text{ kg}/100\text{m} \times 6.7 = 33.5 \text{ lbs}/\text{Mft}$

How to interpret European cable construction and shielding brackets

(2x2x0.25) translates to **(2TP AWG24)**: 2 twisted AWG24 pairs with overall shield


((2x0.34) + (2x0.22)) translates to

((1pair AWG 22) + (1 pair AWG 24)):

1 twisted pair AWG22 + 1 twisted pair AWG24 + overall shield

Sample picture:

two twisted pair with shield, four conductor, and overall shield

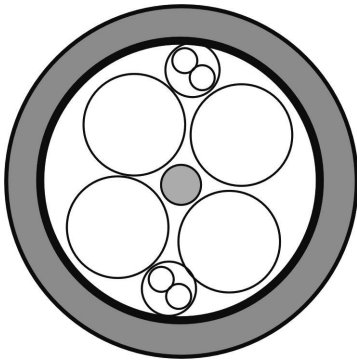

Copyright

Protected trademarks and trade names are not always labelled as such in this publication. This does not mean they are free names as defined in the trademark and brand mark law. Publication does not imply that the descriptions or pictures used are free from rights of third parties. The information is published without regard to possible patent protection. Trade names are used without any guarantee that they can be used freely. In putting together text, pictures and data, we proceeded with the greatest care. Despite this, the possibility of errors cannot be completely excluded. We therefore reject any legal responsibility or liability. We are, of course, grateful for any recommendations for improvement or information useful for making corrections or establishing the truth. But the author does not assume any responsibility for the content of these documents.



RoHS

Germany

Friedrich Lütze GmbH
Postfach 12 24 (PLZ 71366)
Bruckwiesenstrasse 17-19
D-71384 Weinstadt
Tel.: +49 (0)71 51 60 53-0
Fax: +49 (0)71 51 60 53-277(-288)
info@luetze.de



Cables and Cords

Cable Assembly

C-Tracks

Cable fittings

Cable conduits

LSC-Wiring-System

Module- and Interface Technology

Ethernet Connectivity

Suppression Technology

Power Supplies

Railway-Technology

United Kingdom

LÜTZE Ltd.
Unit 3 Sandy Hill Park
Sandy Way, Amington
Tamworth, Staffs, B77 4DU
Tel.: +44 (0)18 27 31333-0
Fax: +44 (0)18 27 31333-2
sales.gb@luetze.co.uk

USA

LUTZE INC.
13330 South Ridge Drive
Charlotte, NC 28273
Tel.: +1 (704) 504-0222
Fax: +1 (704) 504 -0223
info@luetze.com

Austria

LÜTZE Elektrotechnische
Erzeugnisse Ges.m.b.H.
office@luetze.at

Switzerland

LÜTZE AG
info@luetze.ch

France

LUTZE SAS
lutze@luetze.fr

Spain

LUTZE, S.L.
info@luetze.es

China

Luetze Trading (Shanghai) Co.Ltd.
info@luetze.cn